


# LAUREN BROOKS™ SERIES

## LB270VZ The Bayhill™ Collection

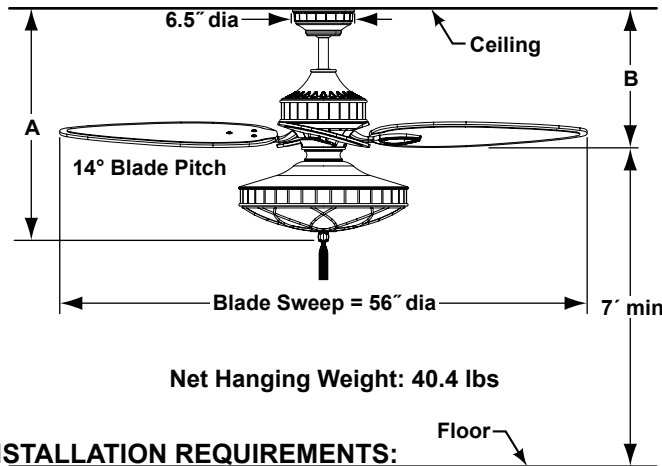

### INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

### ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

### MOTOR SPECS:

188 x 25 motor is designed for optimal performance with this fan.

### BLADES:

A set of four cairo purple wood blades is included.

### CONTROL OPTIONS:

CW2WH 3-wire wall control is included. Wall control unit has 3 speeds and infinitely varying downlight controls. Optional CW1SW and CWRL4 wall controls, CRL4WH and CRL8TS hand-held remote controls are available—sold separately. Instructions are provided with each control.

### LIGHTING OPTIONS:

Amber glass bowl kit with decorative filigree and three 40-watt candelabra bulbs is included. Maximum downlight wattage is not to exceed 120 watts.

### DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Call technical support for more information.

### LOCATION USE:

Fan is dry location rated only.

	A	B
Fan w/6" downrod	24.00"	14.00"
Fan w/12" downrod	30.00"	20.00"
Fan w/18" downrod	36.00"	26.00"
Fan w/24" downrod	42.00"	32.00"
Fan w/36" downrod	54.00"	44.00"
Fan w/48" downrod	66.00"	56.00"
Fan w/60" downrod	78.00"	68.00"
Fan w/72" downrod	90.00"	80.00"

### Available Finish

VZ	Venetian Bronze
----	-----------------

### Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	186	6471	88	0.62	73
Med-High	124	4218	119	0.43	36
Med	87	2844	151	0.31	19
Low	46	1224	183	0.18	7