

FEDDERS®


2010 Room Air Conditioner Specifications

Model	Performance							Electrical Requirements							Features					Cabinet Size			Window Opening		Weight	
	Energy Star	Cooling Area (see note 1)	BTU Cooling	BTU Heating	E.E.R.	Pints Per Hour	Room Air Delivery (CFM max.)	Voltage	Amps Cooling	Amps Heating	Watts Cooling	Watts Heating	Plug Cap. Amps	Receptacle	Air Exchanger	Air Direction	Fan Speeds	Auto Restart	Slide-Out Chassis	Additional Features	Width	Depth*	Height	Width (Mini/Max)	Height (Min)	Net/Ship Weight (lbs)
WINDOW AIR CONDITIONERS																										
AZ3R05F2A	NO	150	5000	-	9.7	0.8	118	115	4.8	-	515	-	10A	A	NO	2 Way	2	NO	NO	M	16 1/4"	13 3/4"	12 5/16"	16 1/2" / 36"	13"	34.2/39.7
AZ6R05F2A	NO	150	5000	-	9.7	0.8	118	115	4.8	-	515	-	10A	A	NO	2 Way	3	YES	NO	*	16 1/4"	13 3/4"	12 5/16"	16 1/2" / 36"	13"	34.2/39.7
AZ7R05F2A	YES	150	5200	-	10.7	1.1	147	115	4.5	-	485	-	10A	A	NO	2 Way	3	YES	NO	*	16 1/4"	15 3/4"	12 5/16"	16 1/2" / 36"	13"	38.6/44.1
AZ6R06F2A	NO	200	6000	-	9.7	1.3	147	115	6.1	-	620	-	10A	A	NO	4 Way	3	YES	NO	*	16 1/4"	15 3/4"	12 5/16"	16 1/2" / 36"	13"	39.7/45.2
AZ7R06F2A	YES	200	6000	-	10.7	1.3	147	115	5.4	-	560	-	10A	A	NO	4 Way	3	YES	NO	*	16 1/4"	15 3/4"	12 5/16"	16 1/2" / 36"	13"	39.7/45.2
AZ6R08F2A	NO	340	8000	-	9.8	1.7	224	115	7.4	-	815	-	10A	A	YES	4 Way	3	YES	NO	*	19 1/8"	15 3/4"	12 5/8"	21 15/16" / 36"	14"	46.3/52.9
AZ7R08F2A	YES	340	8000	-	10.8	1.7	224	115	7.0	-	740	-	13A	A	YES	4 Way	3	YES	NO	*	19 1/8"	15 3/4"	12 5/8"	19 3/8" / 36"	14"	46.3/52.9
AZ6R10F2A	NO	450	10000	-	9.8	2.4	295	115	9.4	-	1020	-	13A	A	YES	4 Way	3	YES	NO	*	19 11/16"	19"	14 3/4"	22 3/16" / 36"	14 1/4"	59.5/66.1
AZ7R10F2A	YES	450	10000	-	10.8	2.7	295	115	8.8	-	930	-	15A	A	YES	4 Way	3	YES	NO	*	19 11/16"	20 15/16"	14 3/4"	19 15/16" / 36"	14 1/4"	58.4/65
AZ7Y12F2A	YES	550	12000	-	10.8	2	280	115	9.7	-	1110	-	15A	A	YES	4 Way	3	YES	YES	*	22 5/8"	21 7/16"	15 3/8"	22 7/8" / 36"	16 1/4"	82.7/91.5
AZ7Y12F7A	YES	550	12000	-	10.8	2.2	280	230	4.9	-	1130	-	15A	B	YES	4 Way	3	YES	YES	*	22 5/8"	21 7/16"	15 3/8"	22 7/8" / 36"	16 1/4"	82.7/90.4
AZ7Y15F2A	YES	800	15000	-	10.7	3.8	460	115	12.0	-	1410	-	15A	A	YES	4 Way	3	YES	YES	*	23 5/8"	25 1/2"	17 3/16"	23 7/8" / 40 1/2"	18.5"	99.2/111.4
AZ7Y18F7A	YES	1000	18000	-	10.7	5.5	460	230	7.7	-	1730	-	15A	B	YES	4 Way	3	YES	YES	*	23 5/8"	25 1/2"	17 3/16"	23 7/8" / 40 1/2"	18.5"	105/119
AZ7R24E7A	YES	1400	24000	-	9.4	8	530	230	11.6	-	2660	-	20A	C	YES	4 Way	3	YES	YES	*	26 9/16"	26 5/8"	18 1/2"	26 13/16" / 42"	19"	122.3/136.6
HEAT / COOL WINDOW AIR CONDITIONERS																										
AZEY08F2A	YES	340	8000	3500	10.8	1.5	280	115	6.6	8.9	740	1050	13A	A	YES	4 Way	3	YES	YES	*	22 5/8"	21 7/16"	15 3/8"	22 7/8" / 36"	16 1/4"	73.2/80.9
AZEY12F7A	YES	550	12000	11000	10.8	2.2	280	230	4.9	15	1130	3500	20A	C	YES	4 Way	3	YES	YES	*	22 5/8"	21 7/16"	15 3/8"	22 7/8" - 36"	16 1/4"	85/92.5
AZEY18F7A	YES	1000	18000	16000	9.7	5.5	460	230	8.4	22	1900	4900	25A	D	YES	4 Way	3	YES	YES	*	23 5/8"	25 1/2"	17 3/16"	23 7/8" / 40 1/2"	18.5"	105/119
AZEY18F7B	YES	1000	18000	10200	9.7	5.5	460	230	8.4	15	1900	3500	20A	C	YES	4 Way	3	YES	YES	*	23 5/8"	25 1/2"	17 3/16"	23 7/8" / 40 1/2"	18.5"	105/119
AZER24E7A	YES	1400	24000	16000	9.4	8	530	230	11.6	22.5	4900	25A	D	YES	4 Way	3	YES	YES	*	26 9/16"	26 5/8"	18 1/2"	26 13/16" / 42"	19"	128/142.2	
THROUGH-THE-WALL AIR CONDITIONERS																										
AZ7T08W2A	YES	340	8000	-	9.4	1.8	283	115	8.0	-	850	-	10A	A	YES	4 Way	3	YES	YES	**	24 1/16"	20 1/4"	14 1/2"	NA	NA	59.5/70.6
AZ7T10W2A	YES	450	10000	-	9.4	2.6	283	115	9.8	-	1060	-	15A	A	YES	4 Way	3	YES	YES	**	24 1/16"	20 1/4"	14 1/2"	NA	NA	65/75
AZ7T10W7A	YES	450	10000	-	9.4	2.8	295	230	5.1	-	1060	-	15A	B	YES	4 Way	3	YES	YES	**	24 1/16"	20 1/4"	14 1/2"	NA	NA	60.6/70.6
AZ7T12W2A	YES	550	12000	-	9.4	3.3	295	115	11.1	-	1240	-	15A	A	YES	4 Way	3	YES	YES	**	24 1/16"	20 1/4"	14 1/2"	NA	NA	67.3/76.1
AZ7T12W7A	YES	550	12000	-	9.4	3.5	295	230	6.3	-	1270	-	15A	B	YES	4 Way	3	YES	YES	**	24 1/16"	20 1/4"	14 1/2"	NA	NA	68.4/78.3
AZET12W7A	YES	550	12000	10600	9.4	3.5	295	230	6.0	15	1330	3450	20A	C	YES	4 Way	3	YES	YES	**	24 1/16"	20 1/4"	14 1/2"	NA	NA	72.8/82.7
AZ7T14W7A	NO	700	14000	-	9.0	4.3	318	230	7.4	-	1550	-	20A	C	YES	4 Way	3	YES	YES	**	24 1/16"	20 1/4"	14 1/2"	NA	NA	68.4/79.4
THROUGH-THE-WALL AIR CONDITIONERS FOR A/B SLEEVES																										
AZ7A09W2A	YES	400	9200	-	9.8	2.4	280	115	8.6	-	940	-	15A	A	YES	4 Way	3	YES	YES	**	26"	16 7/8"	15 5/8"	NA	NA	84/97
AZ7A12W2A	YES	550	11800	-	9.4	3.2	280	115	11.6	-	1260	-	15A	A	YES	4 Way	3	YES	YES	**	26"	16 7/8"	15 5/8"	NA	NA	84/97
AZ7A12W7A	YES	550	11800	-	9.8	3.2	280	230	5.6	-	1200	-	13A	B	YES	4 Way	3	YES	YES	**	26"	16 7/8"	15 5/8"	NA	NA	84/97
PORTABLE AIR CONDITIONERS																										
AZ6P09S2A	NO	400	9000	-	8.8	3	185	115	9.5	-	1080	-	15A	A	NO	1 WAY	3	YES	-	***	17 1/8"	15 1/2"	31 5/16"	NA	NA	66/75
AZ6P12D2A	NO	550	12000	-	10	4	235	115	10.8	-	1300	-	15A	A	NO	2 WAY	3	YES	-	****	18 7/8"	18 5/16"	36 5/8"	NA	NA	79/94
AZHP12D2A	NO	550	12000	11000	8.7	4	235	115	10.8	11	1300	1250	15A	A	NO	2 WAY	3	YES	-	****	18 7/8"	18 5/16"	36 5/8"	NA	NA	79/94

Note 1 The square feet of cooling area listed is based on average room conditions in a moderate climate. Some exceptions are kitchens (add 4,000 BTU), high ceilings or unusual floor plans (increase 10%), warmer climates (increase 10-20%).

Additional Features

M	Mechanical control, no remote control.
*	Full function remote control, 24 hour timer on-off, Sleep mode, Energy Saver mode, LED display, C/F display change, Filter check (250 hours), Auto-restart Function, Operation Mode: Cool/Fan/Dry/Auto, Easy mount window kit
**	Full function remote control, 24 hour timer on-off, Sleep mode, Energy Saver mode, LED display, C/F display change, Auto-restart Function, Operation Mode: Cool/Fan
***	Simple remote control, 12 hour timer on-off, LED display, Auto-restart
****	Simple remote control, 24 hour timer on-off, LCD display, Auto-restart

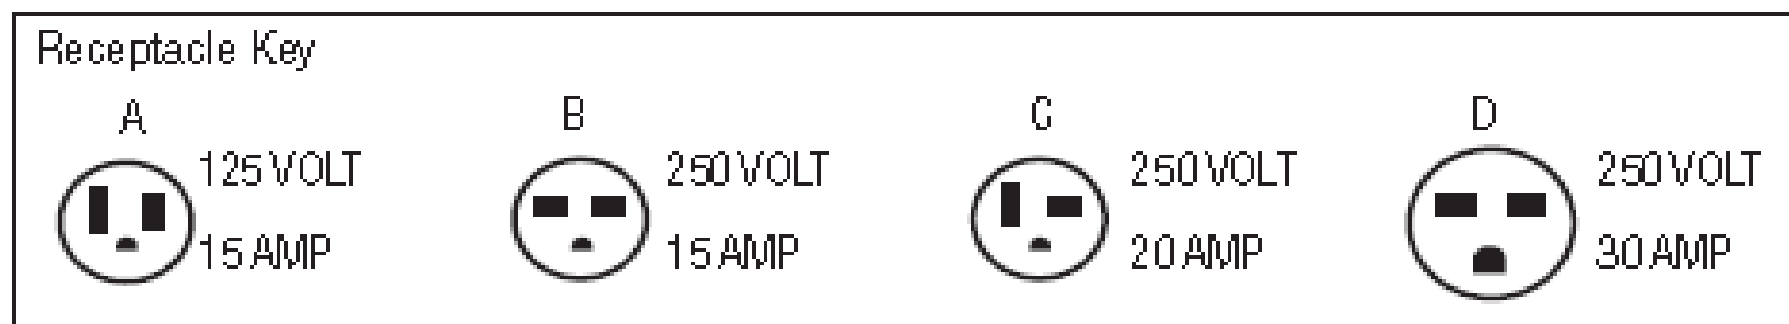

Models and Specifications are subject to change without notice.
All models have electronic controls with remote control unless noted otherwise.
230v models are 208/230volt and specifications listed are at 230v.