

INSTALLATION INSTRUCTIONS

For Model 2726-03


PLEASE READ AND SAVE THESE INSTRUCTIONS

These instructions are provided for your safety. It is very important that they are read carefully and completely before beginning installation of the lighting fixture. We strongly suggest that all direct wired fixtures be installed by a qualified, licensed electrician.

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

BEFORE INSTALLATION

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

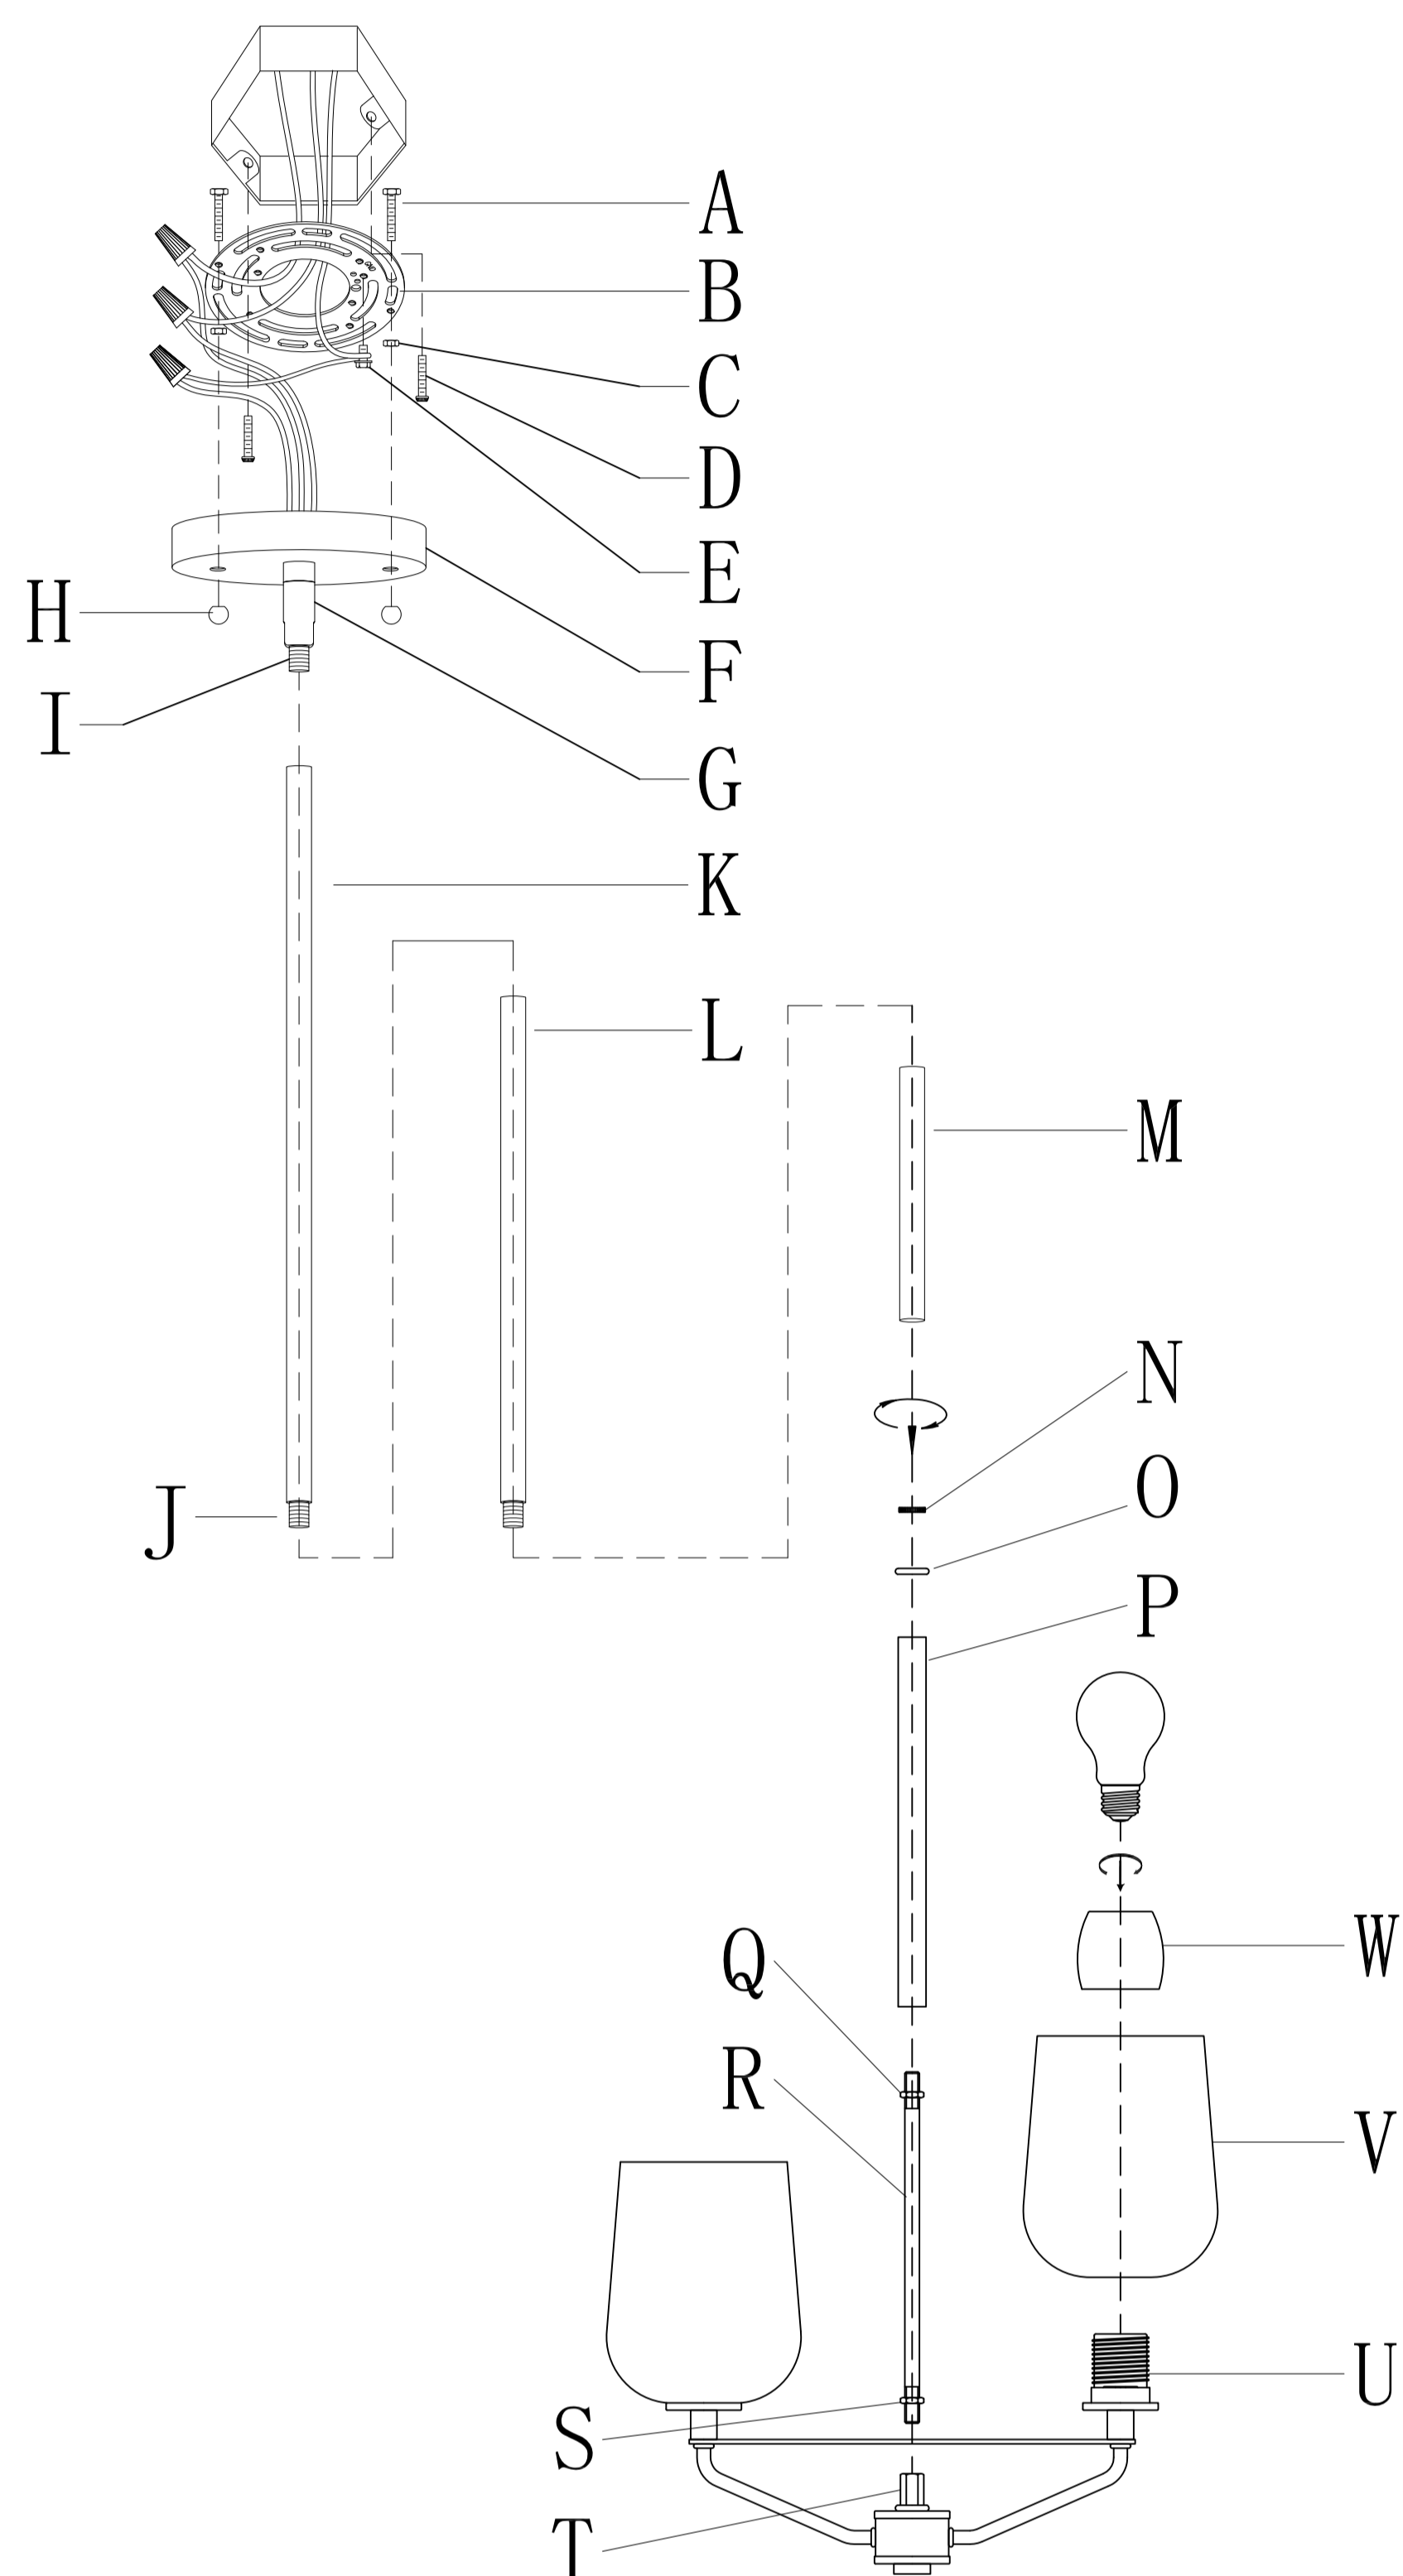

additional rods. If additional rods are needed, contact the place of purchase to order. To shorten the fixture, trim the wires to the desired length, leaving at least 8 to 10 inches of wire in addition to the desired length of rods and removing any rods no longer needed. Keep in mind that you must use at least the provided 6 inch rod (M) to hang the fixture. Feed the wires through the rods and pull the wires until taut before connecting the rods together. Screw the first rod onto the nipple (N) on the fixture followed by any additional rods if needed. Screw the top rod onto the swivel post (I). Pull the fixture wires through the top of the canopy.

CONNECTING THE WIRES


Have an assistant support the fixture's weight while completing the wiring. Attach the fixture's wires to the power supply wires from the junction box. Connect black to black (or smooth); white to white (or ribbed); ground to ground (green or copper). Twist the ends of the same color wire pairs to the same color wire coming from the junction box (white with and black with black). **DO NOT CONNECT DIFFERENT COLORED WIRES TOGETHER.** Make sure all twists are in the same direction. If there is no ground wire (green or copper) from the junction box, locate ground screw (E) on mounting plate (B) and wrap the fixture's ground wire around the green ground screw (E). Use screwdriver to secure ground screw (E) onto mounting plate (B). Tuck all wires neatly into the junction box.

PREPARING FOR INSTALLATION

Carefully remove all contents from the carton. See the important illustrations above. Shut off the power at the circuit breaker and completely remove the old fixture from the ceiling, including the old mounting strap. Remove the mounting strap assembly from the bag. Mounting plate (B) contains several threaded holes. Find the holes that match the spacing of the holes on the junction box and the fixture's canopy. Two mounting screws (A) should be attached to mounting plate (B). You may need to tighten the nuts (C) to hold these screws in place. Pull the junction box wires through the center of mounting plate (B). Place mounting plate (B) over the junction box so that the mounting screws (A) are vertical and aligned with the hole locations on the fixture's canopy (F). Secure the mounting plate (B) to the junction box by tightening the screws.

ASSEMBLING THE FIXTURE

Screw the nipple (R) to connect with the hex coupling nut (T), then lock up with the screw (S). Slip the center stem (P) and cap (O) onto the rod. Adjust the screw (Q) until it's up against the cap (O), then lock the ring (N) on the nipple (R). There is an 18 inch rod (K), a 12 inch rod (L), and a 6 inch rod (M) included for each fixture. Determine the correct number of rods needed for proper hanging height. To lengthen the fixture, add

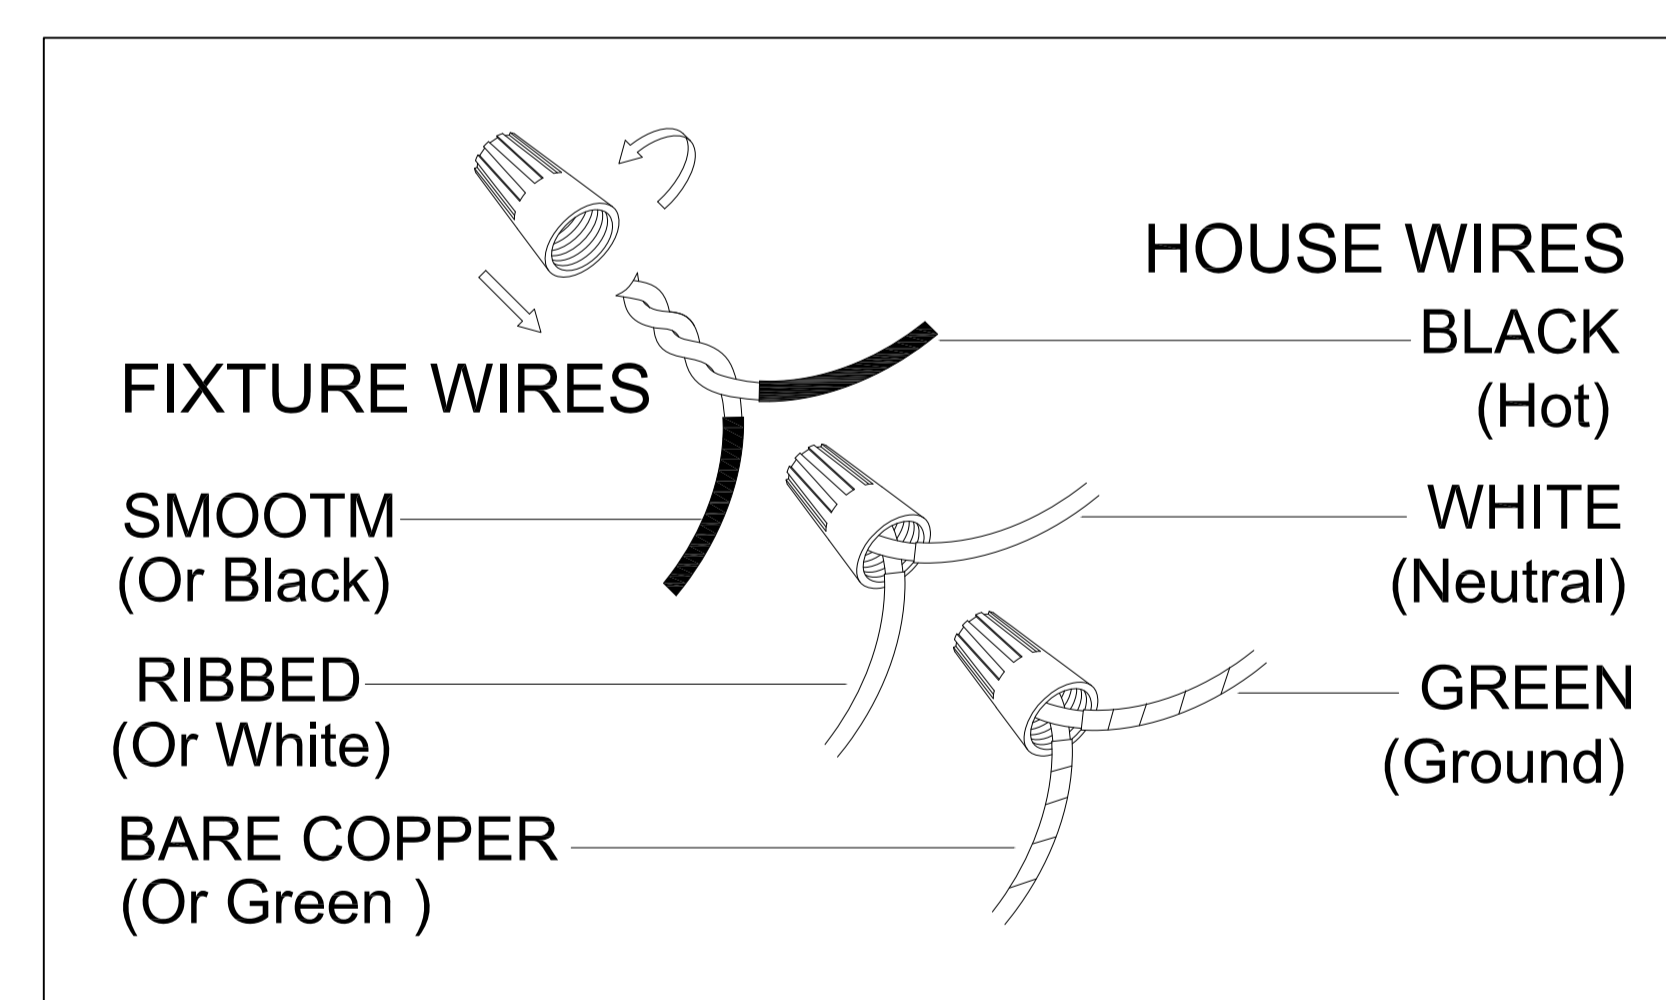

FINISHING THE INSTALLATION

Place canopy (F) flush to the ceiling and tighten the nuts (H) onto the exposed mounting screws (A).

Secure glass (V) onto the socket (U) by screwing the socket ring (W) tight. Install a light bulb (not included) in accordance with the fixture's specifications. Do not exceed the recommended maximum wattage.

Your installation is now complete. Turn on the power and test the fixture.

CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture. Dry with a lint-free or microfiber cloth.