

ASSEMBLING & INSTALLATION INSTRUCTIONS

2738-05-32

The drawing shown may not exactly match the product enclosed.
However, the installation instructions do apply to this product.

- ⓘ **WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**
- ⓘ **ATTENTION! COUPER LE COURANT AU FUSIBLE OU UN DISJONCTEUR.**

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker box. Remove old fixture and all hardware from Junction Box. Carefully unpack your new fixture and lay out all the parts on a clear area. Be careful not to lose any small parts necessary for installation.
2. Feed the electrical wires through the rod (M), ring (J), and top ring (I). Turn the rod (M) and fixture ring (I) clockwise until tight. Install the decorative bars (L) by tightening decorative nuts (N) and (K).
3. Install the glass shades (P), and secure it using the socket ring (O).
4. Install the light bulbs (not included)

NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE!

HANG THE FIXTURE (Fig.2)

5. Thread the nipple (C) to loop (F) until snug. Thread the other end of the nipple (C) to the cross bar (D).
6. Place lock washer (B) to the end of nipple (C) and tighten with hex nut (A) as shown on Fig. 2.
7. Secure the cross-bar assembly to the junction box by aligning the mounting screws (E) upwards with the holes on the junction box. Tighten screws securely with screwdriver.
8. Use chain pliers to open a chain link, connect the chain to the fixture loop (I). Close the link.
9. Determine the proper hanging height. Remove or add chain links as needed.
10. Lace the fixture wires through the chain.
11. Slip the loop collar (H) and the canopy (G) to the fixture chain from the opening side of the chain.
12. Connect the end of the chain link to the loop (F).
13. Feed the fixture wires through the loop (F) and nipple (C).

CONNECTING THE WIRES (Fig.3)

14. Connect wires as shown on Fig. 3. Twist the bare ends of the black wire from the junction box and the smooth wire from the fixture, cap them with a wire nut until snug. Wrap the wire nut with electrical tape. Repeat the process with the white/ribbed and copper/ground wires.

NOTE: Twist wires and the wire nut in the same direction.

15. If the junction box does not have a ground wire, wrap the ground wire from the fixture to the green screen on the cross bar. Tighten with a screw driver.
16. Tuck all wires neatly into the junction box. Raise the canopy (G) and the loop (H) to the ceiling. Secure the canopy (G) by tightening loop (H) to threads on the ceiling loop (F).

Your installation is now complete. Return power to the Junction box and test the fixture.

FIG.1

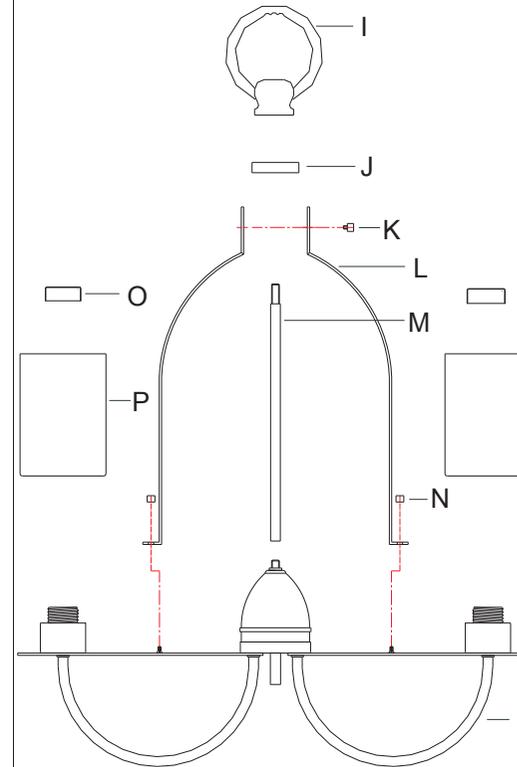


FIG.2

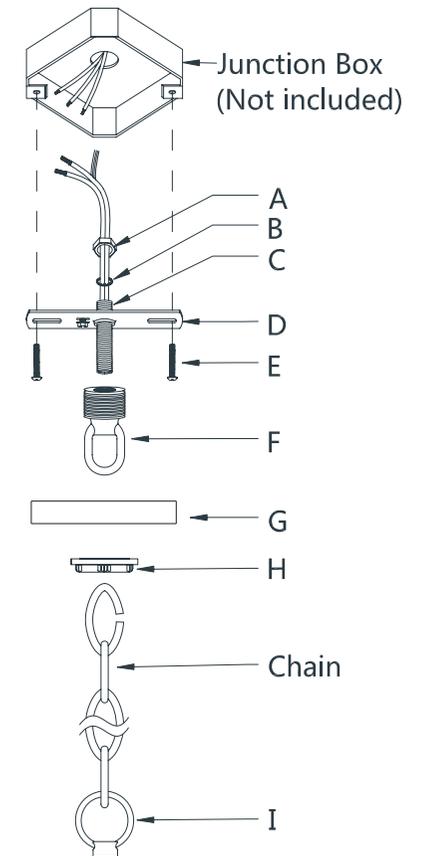


FIG.3

