

Kitchen series
RK59100
Kitchen pulldown

STANDARDS


- Compliant with ASME A112.18.1 B125.1
- Compliant with AB1953
- Compliant with ANSI NSF61 – Annex G
- Certified by CSA International
- Compliant with ANSI A117.1
- Max flow rate 1.80 gpm at 60 psi

Finishes

| | RK59100PC | RK59100BN |
|-----------------|-----------|-----------|
| Polished Chrome | X | |
| Brushed Nickel | | X |

Features

| | RK59100PC | RK59100BN |
|--|-----------|-----------|
| Solid Brass Construction | X | X |
| Single Control Ceramic Disc Valve | X | X |
| Meets NSF 61/9 Annex G Lead Requirements | X | X |
| ADA Compliant | X | X |
| 1 hole installation. Optional 3-hole deckplate | X | X |
| Step-By-Step Installation Instructions | X | X |
| Limited Lifetime Warranty | X | X |

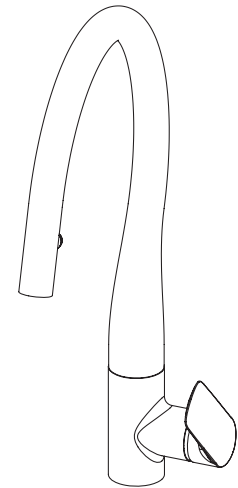

Project _____

Contractor _____