



## Dishwashers

FFID2423R S/W/B

24" Built-In



### Product Dimensions

|                        |               |
|------------------------|---------------|
| Height (Adjustable)    | 33-1/2" - 35" |
| Width                  | 24"           |
| Depth (Including Door) | 25"           |

### More Easy-To-Use Features

#### Built with American Pride

Designed, assembled and built in the U.S.A.

#### Holds up to 12 Place Settings

Our large capacity, tall-tub dishwasher fits up to 12 place settings so you can wash more at once.

#### ENERGY STAR®-Qualified

#### Multiple Cycle Options

Features easy-to-use cleaning cycle options including Top Rack, Rinse Only and Heavy Wash.

#### NSF® Certified

Sanitize cycle removes 99.9% of household bacteria.

#### Polymer Interior

Supports the drying process, keeping dishes dry the first time

#### Low-Rinse Aid Indicator Light

#### Ready-Select® Controls

## Signature Features

### Excellent Wash System

Our direct feed wash and dual water filtration systems give you a thoroughly clean wash every time.

### Effortless™ Dry

Move your dishes straight to your cabinets dry, eliminating the need to towel dry.

### DishSense™ Technology

Automatically adjusts the cycle time based on how much cleaning your dishes need.

### Delay Start

Set your dishwasher to run on your schedule. It can be set to run 2, 4 or 6 hours in advance.

ENERGY STAR®  
NSF® International  
Certification



Available in:



Stainless  
(S)




White  
(W)



Black  
(B)

| Features                                |                                |
|---|--------------------------------|
| Control Design                          | Fully-Integrated Ready-Select® |
| Digital Display                         |                                |
| Door Latch                              | Pull Latch                     |
| Stay-Put Door Hinge Design              | Yes                            |
| Low Rinse-Aid Indicator Light           | Yes                            |
| Interior Design                         | Tall Tub                       |
| Interior Color                          | White                          |
| Wash System                             | Direct Feed                    |
| Wash Levels/Wash Speeds                 | 5/1                            |
| Sound Package                           | UltraQuiet™ III                |
| Filter                                  | PolyPro                        |
| Filter Trap                             | Self-Cleaning                  |
| Soft Food Disposer                      | Yes                            |
| dB Level                                | 55                             |
| Drying System                           | Effortless™ Dry                |
| Cycles                                  |                                |
| Number of Cycles                        | 4                              |
| Heavy                                   | Yes                            |
| Normal                                  | Yes                            |
| Light                                   |                                |
| Quick                                   |                                |
| Favorite                                |                                |
| China/Crystal                           |                                |
| Rinse Only                              | Yes                            |
| Energy Saver Plus                       |                                |
| Upper Rack Wash Only                    | Yes                            |
| Cycle Indicator Light                   |                                |
| Control Lock                            | Yes                            |
| Options                                 |                                |
| Heat/No Heat Dry                        | Yes                            |
| Hi-Temp Wash                            | Yes                            |
| NSF® Certified Sanitize Rinse           | Yes                            |
| Delay Start                             | 2-4-6 Hour                     |
| Rack System                             |                                |
| Rack Design                             | Better                         |
| Rack Coating                            | Nylon                          |
| Upper Rack -                            |                                |
| Stemware/Champagne Glass Holders        |                                |
| Fold-Down Tines                         |                                |
| Cup Shelves                             | 2                              |
| Lower Rack -                            |                                |
| SpaceWise® Silverware Basket            | Ultra 1                        |
| Fold-Down Tines                         |                                |
| Small Items Cover                       |                                |
| Certifications                          |                                |
| ENERGY STAR®                            | Yes                            |
| NSF® International Certification        | Yes                            |
| Specifications                          |                                |
| Water Inlet Location                    | Left Bottom                    |
| Water Usage (Gallons)                   | 4.9 - 8.5                      |
| Water Pressure (PSI)                    | 20 - 120                       |
| Integral Air Gap on Supply              | Yes                            |
| Leveling Legs                           | 4                              |
| Power Supply Connection Location        | Right Bottom Front             |
| Voltage Rating                          | 120V / 60 Hz                   |
| Connected Load (kW Rating) @ 120 Volts¹ | 1.20                           |
| Amps @ 120 Volts                        | 10.0                           |
| Shipping Weight (Approx.)               | 83 Lbs.                        |

<sup>1</sup>For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

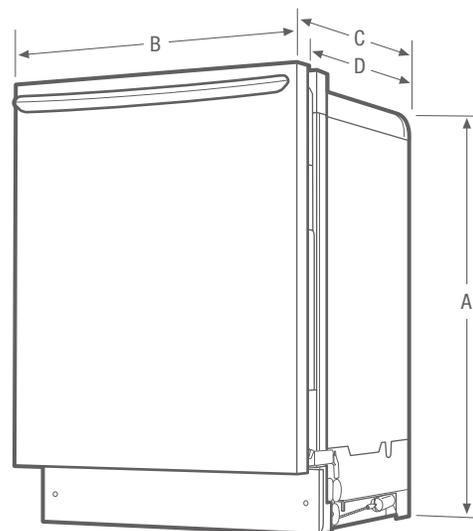

**NOTE:** For planning purposes only. Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at [frigidaire.com](http://frigidaire.com).



| Product Dimensions         |               |
|----------------------------|---------------|
| A - Height (Adjustable)    | 33-1/2" - 35" |
| B - Width                  | 24"           |
| C - Depth (Including Door) | 25"           |
| D - Depth (To Tub Flange)  | 22-1/2"       |
| Depth with Door Open 90°   | 49-1/4"       |

| Cutout Dimensions |         |
|-------------------|---------|
| Height (Min.)     | 34-1/4" |
| Height (Max.)     | 35"     |
| Width (Min.)      | 24"     |
| Depth (Min.)      | 24"     |

Accessories information available on the web at [frigidaire.com](http://frigidaire.com)



## FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • [frigidaire.com](http://frigidaire.com)  
 CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • [frigidaire.ca](http://frigidaire.ca)

FFID2423R 05/15

© 2015 Electrolux Home Products, Inc.

Specifications subject to change.

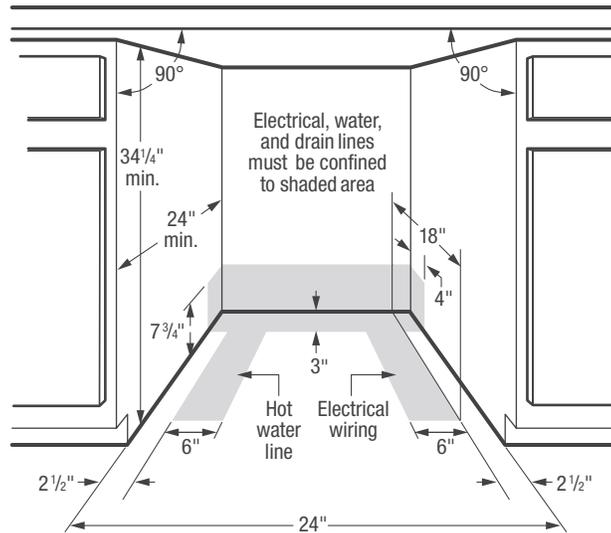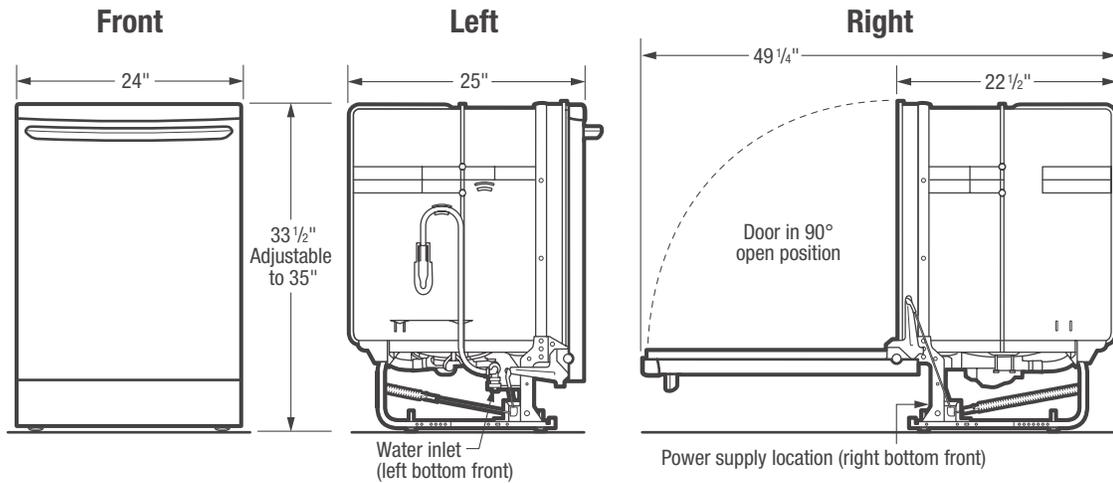

**Dishwasher Specifications**

- Product Shipping Weight (approx.) - 83 Lbs.
- Voltage Rating - 120V / 60 Hz / 15 Amps (maximum 20 Amps if connected with disposer)
- Connected Load (kW Rating) @ 120 Volts = 1.20 kW (For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @ 120V = 10 Amps
- Always consult local and national electric & plumbing codes. Meets requirements of ASSE 1006 – integral air gap on supply.
- Water Pressure - Hot water line to dishwasher must provide between 20 and 120 pounds per square inch (psi) with at least 120° F hot water temperature.
- Make sure location has correct drain, water and electrical outlets to make connections.
- Electrical and water supplies should enter cabinet opening on floor, or through back or side walls, as shown in shaded areas.
- Keep back free of drain, water & electrical supply.
- Connections preferably located toward left side of dishwasher. Do not cross drain, water or electrical lines in front of motor, blower or frame.

- If connecting drain hose to sink trap, local code may require installation of Air Gap Kit (not included).
- When installing adjacent to wall, cabinet or other obstruction that extends beyond front edge of unit, allow 2" minimum clearance between opened door and obstruction.
- Floor should be flat and free of obstructions.
- When installing at end of cabinet line, sides and back must be fully enclosed.
- Do not install unit under a cooktop, damage will occur.
- Recommended to seal cabinets, enclosing all sides of dishwasher, including underside of countertop, with oil-based paint or moisture-proof polyurethane to prevent possible steam/moisture damage.
- Once installation is complete, Cabinet Seal Kit (PN# 154528701) available to seal between unit and cabinets.

**Note:** For planning purposes only. Refer to Product Installation Guide on the web at [frigidaire.com](http://frigidaire.com) for detailed instructions.

**Optional Accessories**

- Cabinet Seal Kit (PN# 154528701).