



4.4 Cu. Ft. Top Load Washer

Top Load Washer

Available Products: FLVW7523BW

Available Colors: White

Version: 01/25


Product Specifications

Washer		Washer Cycles	
Agitator	Yes	Cycle Count	10
Drum Material	Stainless Steel	Active Wear	Yes
Maximum Spin Speed	710 RPM	Bulky	Yes
Water Level Adjustment	Yes	Delicates	Yes
Washer Options		Fast Wash	Yes
Chime	Yes	Heavy	Yes
Delay	Yes	Normal	Yes
Extra Rinse	Yes	Rinse and Spin	Yes
Fabric Softener	Yes	Whites	Yes
Favorite	Yes	Soil Levels	
Max Fill	Yes	Soil Level Selections	Yes
Soak	Yes	Light	Yes
Temperature Settings		Normal	Yes
Auto Temperature Control	Yes	Heavy	Yes
Cold	Yes	Extra Heavy	Yes
Tap Cold	Yes	Controls	
Warm	Yes	Child Lock	Yes
Hot	Yes	Control Lock	Yes
Dispenser		Cycle Status Lights	Yes
Bleach Dispenser	Yes	Delay Start	Yes
Detergent Dispenser	Yes	Delay Start Time	12 Hours
Dispenser Drawer	Yes	Estimated Time Remaining	Yes
Fabric Softener Dispenser	Yes	Power On/Off	Yes
Dimensions and Volume		Electrical Specifications	
Height	42"	Minimum Circuit Required	15 Amps
Height With Lid 90° Open	57 2/5"	Voltage Rating	120 V
Width	27"	General Specifications	
Depth	28 1/2"	Chime On / Chime Off	Yes
Washer Drum Capacity	4.4 Cu. Ft.	Leveling Legs	Yes
Energy Data		Prop 65 Label	Yes
Integrated Water Factor	6.50	Warranty - Labor	1 Year
kWh/cycle	0.52 kWh	Warranty - Parts	1 Year
kWh/year	154 kWh	Safety Certifications and Approvals	
Modified Energy	1.57	UL Listed	Yes
Water Usage/Year	6180 Gallons		
Performance Certifications and Approvals			
High Efficiency	Yes		


Installation Diagram

Clearance requirements

MINIMUM INSTALLATION CLEARANCES - Inches (cm)				
	SIDES	REAR	TOP	FRONT
Alcove	1" (2.5 cm)	6" (15.2 cm)	24" (61 cm)	n/a
Closet	1" (2.5 cm)	6" (15.2 cm)	24" (61 cm)	2" (5.1 cm)

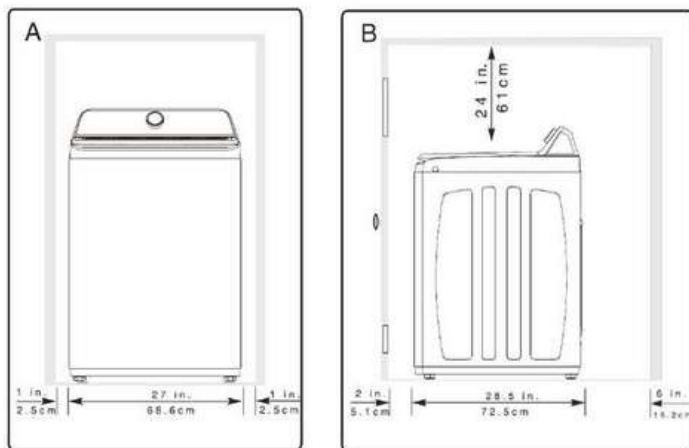

Washer Dimensions

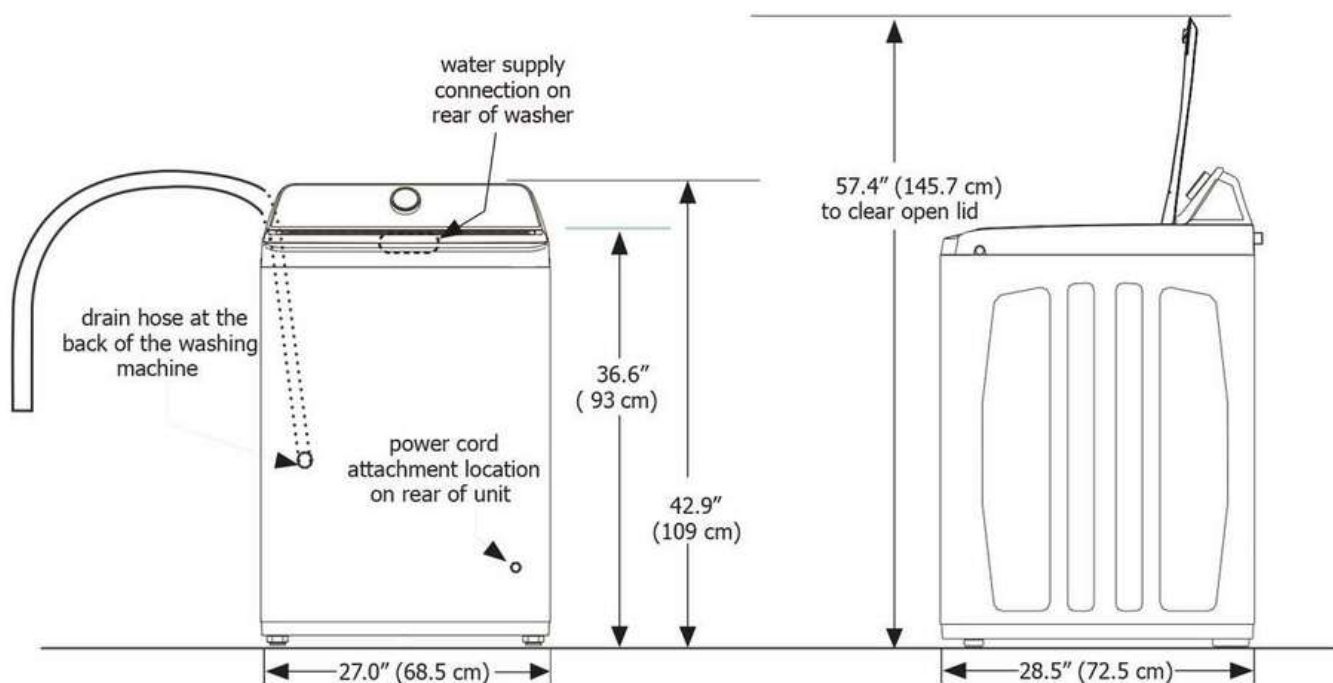

¹Drain hose length on washer approximately 66.93 inches (170 cm).

²Power supply cord length approximately 72.8 inches (185 cm).



7 Cu. Ft. Electric Dryer

Dryer

Available Products: FLVE7523BW

Available Colors: White

Version: 11/24

Product Specifications

Dryer

Drum Back Type	Stainless Steel
Drum Material	Aluminized Alloy Steel
Dryness Level Selections	Yes
Lint Filter	Yes
Moisture Sensor	Yes

Dryer Options

Child Lock	Yes
Damp Dry Signal	Yes
Time Adjust (Add Time)	Yes
Time Adjust (Remove Time)	Yes
Wrinkle Care	Yes

Dryness Level

Max	Yes
Normal	Yes
More Dry	Yes
Less	Yes

Exterior

Reversible Door	Yes
-----------------	-----

Electrical Specifications

Voltage Rating	120v
----------------	------

Installation

Ventilation Type	Vented
------------------	--------

Safety Certifications and Approvals

CSA Listed	Yes
UL Listed	Yes

Dryer Cycles

Cycle Count	10
Active Wear	Yes
Air Fluff	Yes
Bulky	Yes
Casual	Yes
Delicates	Yes
Fast Dry	Yes
Heavy Duty	Yes
Normal	Yes
Sanitize	Yes
Timed Dry Time	Yes

Drying Temperatures

Air Fluff	Yes
Low	Yes
Medium	Yes
High	Yes
Maximum	Yes

Controls

Child Lock	Yes
------------	-----

Dimensions and Volume

Height	43 1/10"
Width	27"
Depth	30 1/10"
Depth With Door 90° Open	50"
Dryer Drum Capacity	7 Cu. Ft.

Energy Data

kWh/cycle	2.27 kWh
kWh/year	641 kWh

General Specifications

Chime On / Chime Off	Yes
Leveling Legs	Yes
Prop 65 Label	Yes
Warranty - Labor	1 Year
Warranty - Parts	1 Year

Installation Diagram


Installation in a Recess or Closet

- 1 A dryer installed in a bedroom, bathroom, recess or closet, MUST be exhausted outdoors.
- 2 No other fuel burning appliance shall be installed in the same closet as the gas dryer.
- 3 Your dryer needs the space around it for proper ventilation.

DO NOT install your dryer in a closet with a solid door.

- 4 Closet door ventilation required: A minimum of 120 square inches (774.2 cm²) of opening, equally divided at the top and bottom of the door, is required. Openings should be located 3 inches (7.6 cm) from bottom and top of door. Openings are required to be unobstructed when a door is installed. A louvered door with equivalent air openings for the full length of the door is acceptable.

Dryer Dimensions

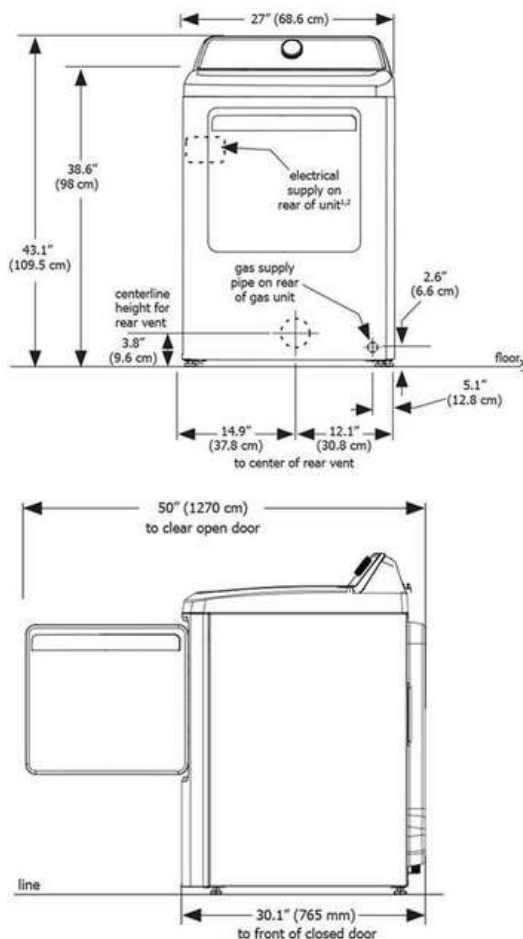

MINIMUM INSTALLATION CLEARANCES - Inches (cm)				
	SIDES	REAR	TOP	FRONT
Alcove	1" (2.5 cm)	6" (15.2 cm)	24" (61 cm)	n/a
Closet	1" (2.5 cm)	6" (15.2 cm)	24" (61 cm)	2" (5.1 cm)

