

CX491610
Full surface induction cooktop
Stainless steel frame
Width 36"

One large cooking surface.
Free positioning of cookware.
Cookware of any shape and size can be used.
TFT touch display for an intuitive control of all functions.
Max. power output for big cookware of up to 4.6 kW
Precision crafting of 1/8-inch stainless steel
For surface mount installation with a visible edge or for flush installation

Color Variants

CX491610
Stainless steel frame
Width 36"

Optional accessories

GN232110
Teppan Yaki griddle made of multi ply material

GN232230
Teppan Yaki griddle made of multi ply material

Cooking zones

One unique cooking surface allows for cookware as small as 3" and as large as 13" x 21".
Up to 4 items of cookware can be placed simultaneously on the cooktop.

Operation

Large 6.5" color graphic TFT touch display with an easy-to-use display concept.
Electronic power control in 17 output levels.

Features

Booster function.
Individual pot detection.
Timer for each cooking position.
Short-term timer.
Information key with use indicators.
Power management.

Safety

Main switch.
Residual heat indicator.
Child lock.
Display cleaning protection.

Planning notes

Depending on the type of installation (surface-mounted or flush-mounted), the specific definition of the cut-out must be observed.
When using the appliance cover VA 440 or adjustment strip VA 450 additional space for cut-out depth needs to be considered.
In a combination of Vario cooktops with at least one appliance cover, the adjustment strip VA 450 is required.
In a combination of several Vario 400 series cooktops a connection strip must be used. Depending on the type of installation - surface-/ or flush-mounted, with or without cover - the respective VA 420 connecting strip must be used.
For flush installation the edge height in the cut-out needs to be at least 1/2" and for surface-mount 3/8". Ensure a continuous cut surface of 90°.
The weight capacity and stability, especially in case of thin countertops, must be supported using suitable substructures. Take the appliance weight and additional loads into account.
Flush installation is possible in countertops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the edges must be observed. For other materials, please consult with your countertop manufacturer.
The groove must be continuos and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuos lining.

Product Features
Knob Material
Sealed Burners
No
Burners with booster
All
Type of grate
Total BTU load
LP Gas Connection Rating (BTU)
Power of 1st heating element (kW in boost)
Dimension of 1st heating element (in)
Power of 2nd heating element (kW in boost)
Dimension of 2nd heating element (in)
Power of 3rd heating element (kW in boost)
Dimension of 3rd heating element (in)
Power of 4th heating element (kW in boost)
Dimension of 4th heating element (in)
Power of 5th heating element (kW in boost)
Dimension of 5th heating element (in)
Power of 6th heating element (kW in boost)
Dimension of 6th heating element (in)

Consumption and connection features
UPC code
825225803300
Variant color
anthracite
Energy source
Electric
Gas type
Alternative gas type
Watts (W)
7200
Current (A)
Volts (V)
208-240
Frequency (Hz)
50; 60
Approval certificates
CSA
Power Cord Length
Plug type
no plug
Required cutout size (HxWxD) (in)
3 7/8" x 34 3/4" x 19 7/8"
Minimum distance from counter front (in)
2 1/2"
Minimum distance from rear wall (in)
2 3/8"
Overall appliance dimensions (HxWxD) (in)
3/8"+3 7/8" x 35 3/4" x 20 1/2"
Product packaging dimensions (HxWxD) (in)
7 1/16" x 42 1/8" x 26 3/4"
Net weight (lbs)
69
Gross weight (lbs)
80
Total number of cooktop burners
4


2015-06-15

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.
The wok pan WP 400 001 cannot be used with this appliance.
Immersion depth depending on installation situation, 2 3/4" for surface-mount or 2 13/16" for flush-mount.
Intermediate shelf is required.
Appliance can be snapped into the countertop from above.


Rating

Total rating 7.2 kW.
Connecting cable 60" without plug (hardwire required).

GAGGENAU

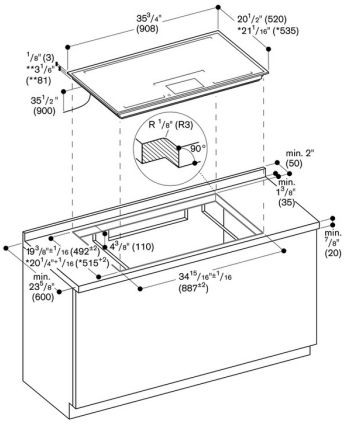


* with adjustment strip. See separate planning notes.
** Recessed depth in the vicinity of the electrical connection box: 4 1/16" (104).

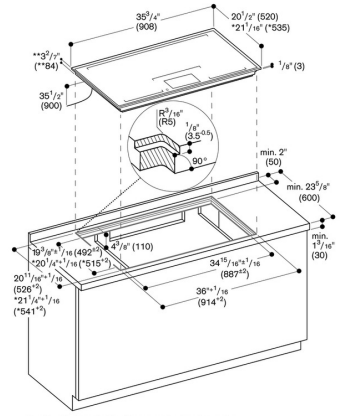


* with adjustment strip. See separate planning notes.
** Recessed depth in the vicinity of the electrical connection box: 4 7/32" (107).

Cross-section

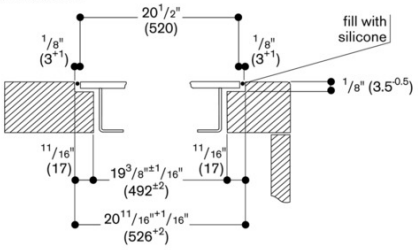


For installation with appliance cover or adjustment bar, observe the deeper notch and the slot width front and back.

View from above

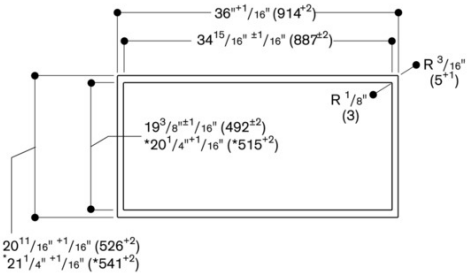

* with adjustment strip

Longitudinal section

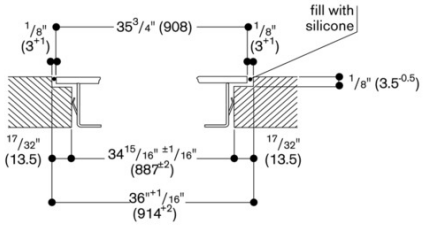

GAGGENAU