



<b>EB333611</b>
<b>Single Oven</b>
<b>stainless steel</b>

**Width 36" (90 cm)**

One-piece front-hinged door with 3 mm precision crafted stainless steel front door panel  
Soft door opening and closing system  
Diagonally positioned light sources for optimal interior lighting  
Pyrolytic self-cleaning system  
Universal heating system with 17 heating methods, with core temperature probe, rotisserie spit and baking stone operation  
Automatic programs  
Core temperature probe with estimation of cooking time  
Hot air fan rotates in both directions for ideal heat distribution  
TFT touch display  
Panel-free appliance with control module behind glass  
Electronic temperature control from 85°F - 550°F  
Net volume (83 litres)

#### Cooking modes

Convection. Economy convection..  
Top + bottom heat. Top + 1/3 bottom heat. Top heat. 1/3 top + bottom heat.  
Bottom heat. Convection + bottom heat. Convection + 1/3 bottom heat.  
Convection broiling.. Broiling. Compact grill. Baking stone operation. Roaster function. Dough proofing. Defrosting. Keeping warm.

#### Operation

Rotary knob and TFT touch display operation.  
Clear text display in 44 languages.  
Option to save 50 individual recipes (incl. core temperature probe)  
Personalization of automatic programs.  
Information key with use indicators.  
Front-hinged door with 90° door opening angle.

#### Features

Three-point core temperature probe with automatic shut-off and estimation of cooking time.  
Automatic programs.  
Rotisserie spit.  
Baking stone outlet.  
Actual temperature display.  
Fast heating setting.  
Timer functions: cooking time, switch-off time, short-term timer, stopwatch.  
60 W halogen light on the top.  
2 x 10 W halogen light on the side.  
Enamelled side shelf supports with 3 tray levels, pyrolysis-safe.  
Home network integration for digital services (Home Connect) either via cable connection LAN (recommended) or wireless via WiFi.  
The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: [home-connect.com](http://home-connect.com).

#### Safety

Thermally insulated door with quintuple glazing.  
Child lock.  
Safety shut-off.  
Cooled housing with temperature protection.

#### Cleaning

Pyrolytic self-cleaning.  
Gaggenau Clean-Enamel.  
Heated air cleaning catalyst.

#### Product Features

##### Cooking mode

Baking stone function, Bottom heat, Conventional heat, Defrost, Dough proving setting, Full width broil, Half width broil, Hot Air, Hot air broiling, Hot Air-Eco, Roasting function, Top heat, warming

##### Integrated Cleaning system

##### Self Clean

##### Interior Lights - primary cavity

3

##### Pull-out system

##### Accessory

##### Timer settings

Alarm, Off, On, timer

x enamel baking tray, suit. pyrolytic clean, x rotary spit, x grill shelf, x grill tub with grid, x pluggable meat probe

##### Bake Element Wattages primary cavity (W)

1700

##### Broil Element Wattages primary cavity (W)

4250

##### Convection Element Wattages primary cavity (W)

2070

##### Microwave Wattages (W)

##### Drawer wattage (W)

#### Planning notes

The door panel surface of the appliance extends 1 9/16" (40 mm) from the cabinet front.

The outer edge of the door handle extends 3 9/16" (90 mm) from the cabinet front.

For installation underneath cooktops: Distance between the underside of the cooktop and the top edge of the oven cavity: min. 9/16". The planning notes for the cooktops (particularly regarding ventilation, gas/ electric connection) must be taken into account.

To achieve the 21 5/8" (550 mm) installation depth, the connection cable needs to follow the slanted edge on the corner of the housing.

Plan a power outlet outside of the cut-out niche.

The LAN port can be found at the back on the upper left side.

#### Rating

Total rating 5.9 KW.

Total Amps: 25 A.

208 / 220 - 240 V / 60 Hz.

Connection cable 47 1/4" without plug.

Plan for a LAN cable.

#### Consumption and connection features

##### UPC code

825225957454

##### Product color

Stainless steel

##### Alternative colors available

##### Energy source

Electric

##### Watts (W)

5860

##### Current (A)

25

##### Volts (V)

208/220-240

##### Frequency (Hz)

60

##### Approval certificates

CSA, ETL, UL

##### Power Cord Length

47 1/4

##### Plug type

fixed connection

18 11/16 x 33 7/8 x 22 1/16

##### Product packaging dimensions (HxWxD) (in)

27 9/16 x 39 3/4 x 28 15/16

##### Net weight (lbs)

177.000

##### Gross weight (lbs)

200.000


2020-09-12

Page 1

# GAGGENAU

EB333611  
Single Oven  
stainless steel  
Width 36" (90 cm)

2020-09-12  
Page 2

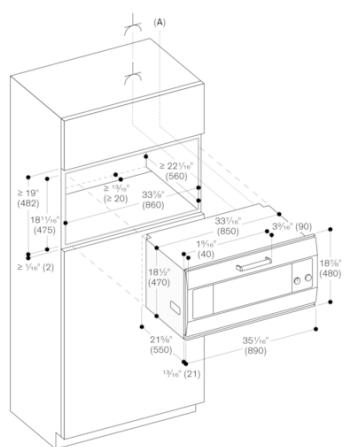

A: LAN Port  
A: Socket

Measurements in inches (mm)

**GAGGENAU**