

**Vario 200 series downdraft ventilation****VL 200****VL 200 120**

Black control panel.

Width 5 15/16" (15 cm).

Air extraction / air recirculation.

Installation accessories**AD 410 040**

Flexible connecting piece for VL 200.

AD 851 041

Connecting piece VL 200 for extension for extra deep cooktop.

VV 200 010

Stainless steel connection strip for combination with other Vario appliances of the 200 series.

VV 200 020

Black connection strip for combination with other Vario appliances of the 200 series.

Optional accessories**LS 041 001**

Air deflector for VL 200 next to gas appliance.

Stainless steel.

Combinable with:

Vario cooktops 200 series

VI 230

VI 263

VG 231

VG 232

VG 264

VP 230

VR 230

Installation accessories for the air recirculation ducts can be found starting on page 196.**Highlights**

- Can be combined with other Vario 200 series products.
- Highly efficient ventilation system at the cooktop integrated in the countertop.
- Function for automatic, sensor-controlled power adjustment depending on the build-up of cooking vapors.
- Minimal planning and easy installation.
- Low-noise system with recirculation blower AR 410 710.
- Air extraction with AR 403 722 blower.

Output

Power levels depend on the selected blower, see table on pages 208-209.

Features

Control knobs with illuminated ring.
3 electronically controlled power levels and 1 intensive mode.
Automatic function with sensor-controlled run-on function.
Large-scale metal grease filter with high grease absorption.
Grease filter, dishwasher-safe.
Grease filter and activated charcoal filter saturation indicator.
Airflow-optimized interior for efficient air circulation.
Interval ventilation, 6 min.
Enamelled ventilation grill, dishwasher-safe.
Air exhaust bend included in delivery.
Overflow capacity 8.5 oz. (250 ml).

Consumption data

Consumption data is referred to a configuration with the recirculation blower AR 410 710.
Sound level min. 60 dB / max. 73 dB.


Planning notes

Air recirculation mode in combination with recirculation blower with AR 410 710 or AR 413 722.
Air extraction in combination with AR 403 722 blower.
Please refer to page 211 for recommended configurations of downdraft ventilations and remote blowers and the needed ducting elements.
For each VL one blower unit is recommended.
Maximum cooktop width between 2 VL downdraft units: 24" (60 cm).
Vario cooktops like Vario electric grill and Vario gas wok should be placed between 2 VL.
In case of Vario electric grill recirculation is not recommended.
If installed next to gas appliances, the air deflector LS 041 001 is recommended to ensure maximum performance of the cooktop.
When having installed the air deflector LS 041 001 the wok pan WP 400 001 can not be used.


Please read additional planning notes on page 117.**Please read the installation details regarding air ducting on pages 188-190.****Rating**

120 V / 60 Hz.

Connecting cable 66" (1.7 m) between VL and recirculation/inline blower.

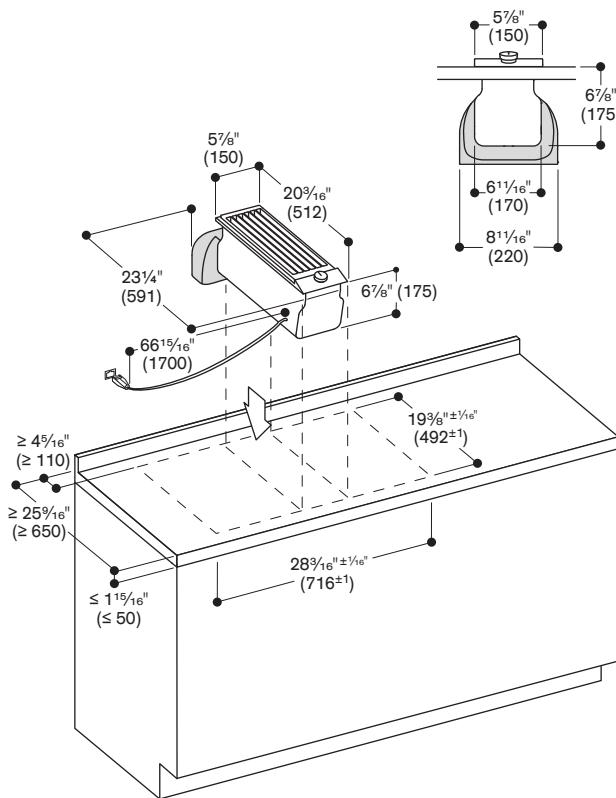

AD 410 040: Flexible connection piece for VL 200, DN 150 flat

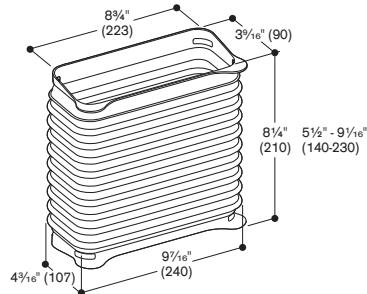

AD 851 041: Connecting piece VL 200 for extension with flat duct DN 150 for extra deep countertop

