




GENERAC® TRANSFER SWITCHES

RTS Automatic Transfer Switch

100 - 400 Amps, 3-phase

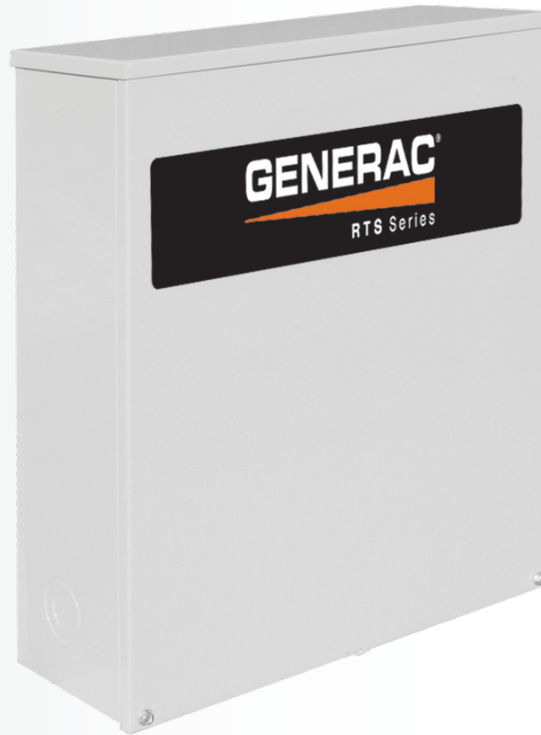

DESCRIPTION

All RTS style switches are available in 120/240 1 ϕ , 120/208 3 ϕ , 120/240 3 ϕ , and 277/480 3 ϕ . All switches are open transition.

STANDARD FEATURES

All RTS transfer switches are housed in an aluminum NEMA/UL Type 3R enclosure*, with electrostatically applied and baked powder paint. The Heavy Duty Generac Contactor is a UL recognized device, designed for years of service. The control at the generator handles all the timing, sensing and exercising functions.

*400 amp, 277/480 3 ϕ enclosure is steel.



FUNCTIONS

All Timing and sensing functions originate in the generator controller

Utility voltage drop-out.....	<60%
Timer to generator start	10 second factory set, adjustable between 10-30 seconds
Engine warm up delay	5 seconds
Standby voltage sensor60% for 5 seconds
Utility voltage pickup.....	>80%
Re-transfer time delay	15 seconds
Engine cool-down timer	60 seconds
Exerciser	12 minutes every 7 days

The transfer switch can be operated manually without power applied.

SPECIFICATIONS

Amps	100					200					400				
Voltage	120/208, 3Ø 120/240, 3Ø 277/480, 3Ø					120/208, 3Ø 120/240, 3Ø 277/480, 3Ø					120/208, 3Ø 120/240, 3Ø 277/480, 3Ø				
Load Transition Type (Automatic)	Open Transition					Open Transition					Open Transition				
Enclosure Type	NEMA 3R					NEMA 3R					NEMA 3R				
Withstand Rating (Amps)	10,000 14,000 14,000					10,000 25,000 25,000					18,000				
Lug Range	2/0 - #14					400 MCM - #4					600 MCM - #4 or 2-250 MCM				
External Dimensions	Height		Width		Depth	Height		Width		Depth	Height		Width		Depth
	H1	H2	W1	W2		H1	H2	W1	W2		H1	H2	W1	W2	
120/208, 3Ø	19.3	24.1	16.9	20.2	7.1	19.3	24.1	16.9	20.2	7.1	31.3	36.1	19.2	24.0	10.0
120/240, 3Ø	19.3	24.1	16.9	20.2	7.1	19.3	24.1	16.9	20.2	7.1	31.3	36.1	19.2	24.0	10.0
277/480, 3Ø	31.3	36.1	19.2	24.0	10.0	43.0	48.1	25.0	30.1	13.1	31.3	36.1	19.2	24.0	10.0
Unit Weight (lbs.)	20 53 105					20 53 110					133 133 133				

TRANSFER SWITCH FEATURES

- Electrically operated, mechanically-held contacts for fast, positive connections.
- Rated for all classes of load, 100% equipment rated, both inductive and resistive.
- 160 millisecond transfer time.
- Dual coil design.
- Main contacts are silver plated or silver alloy to resist welding and sticking.
- NEMA 3R (indoor/outdoor rated) aluminum enclosure is standard.
- Limited Two Year Warranty.

