

# Floodlight

8560701, 8560702 | 1.0

## GENERATION LIGHTING OUTDOOR WALL

### SAVE THESE INSTRUCTIONS!

#### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for wet locations.


Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

#### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


Use minimum 90°c supply conductors.

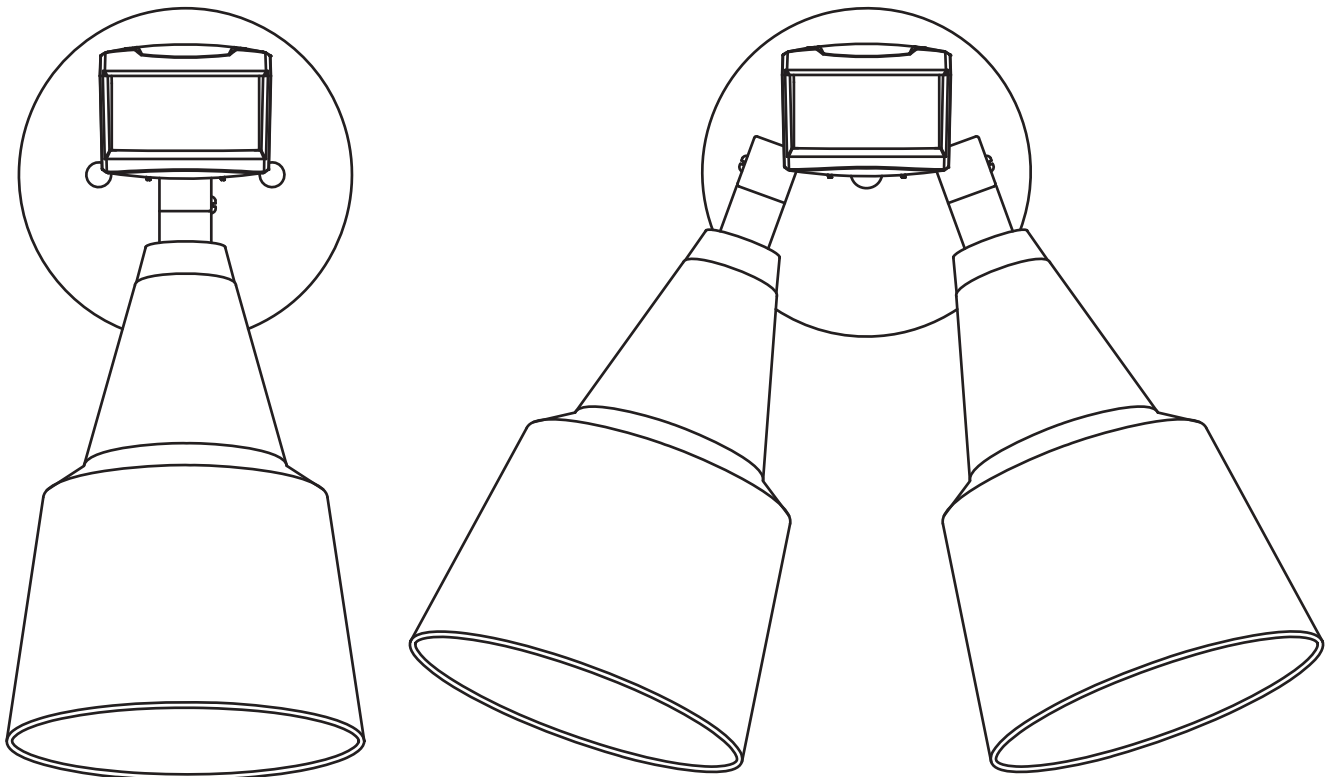

GENERATION LIGHTING  
7400 Linder Ave., Skokie, IL 60077  
T 847.410.4400 | F 847.410.4500  
www.generationlighting.com

# Install the Fixture

1A

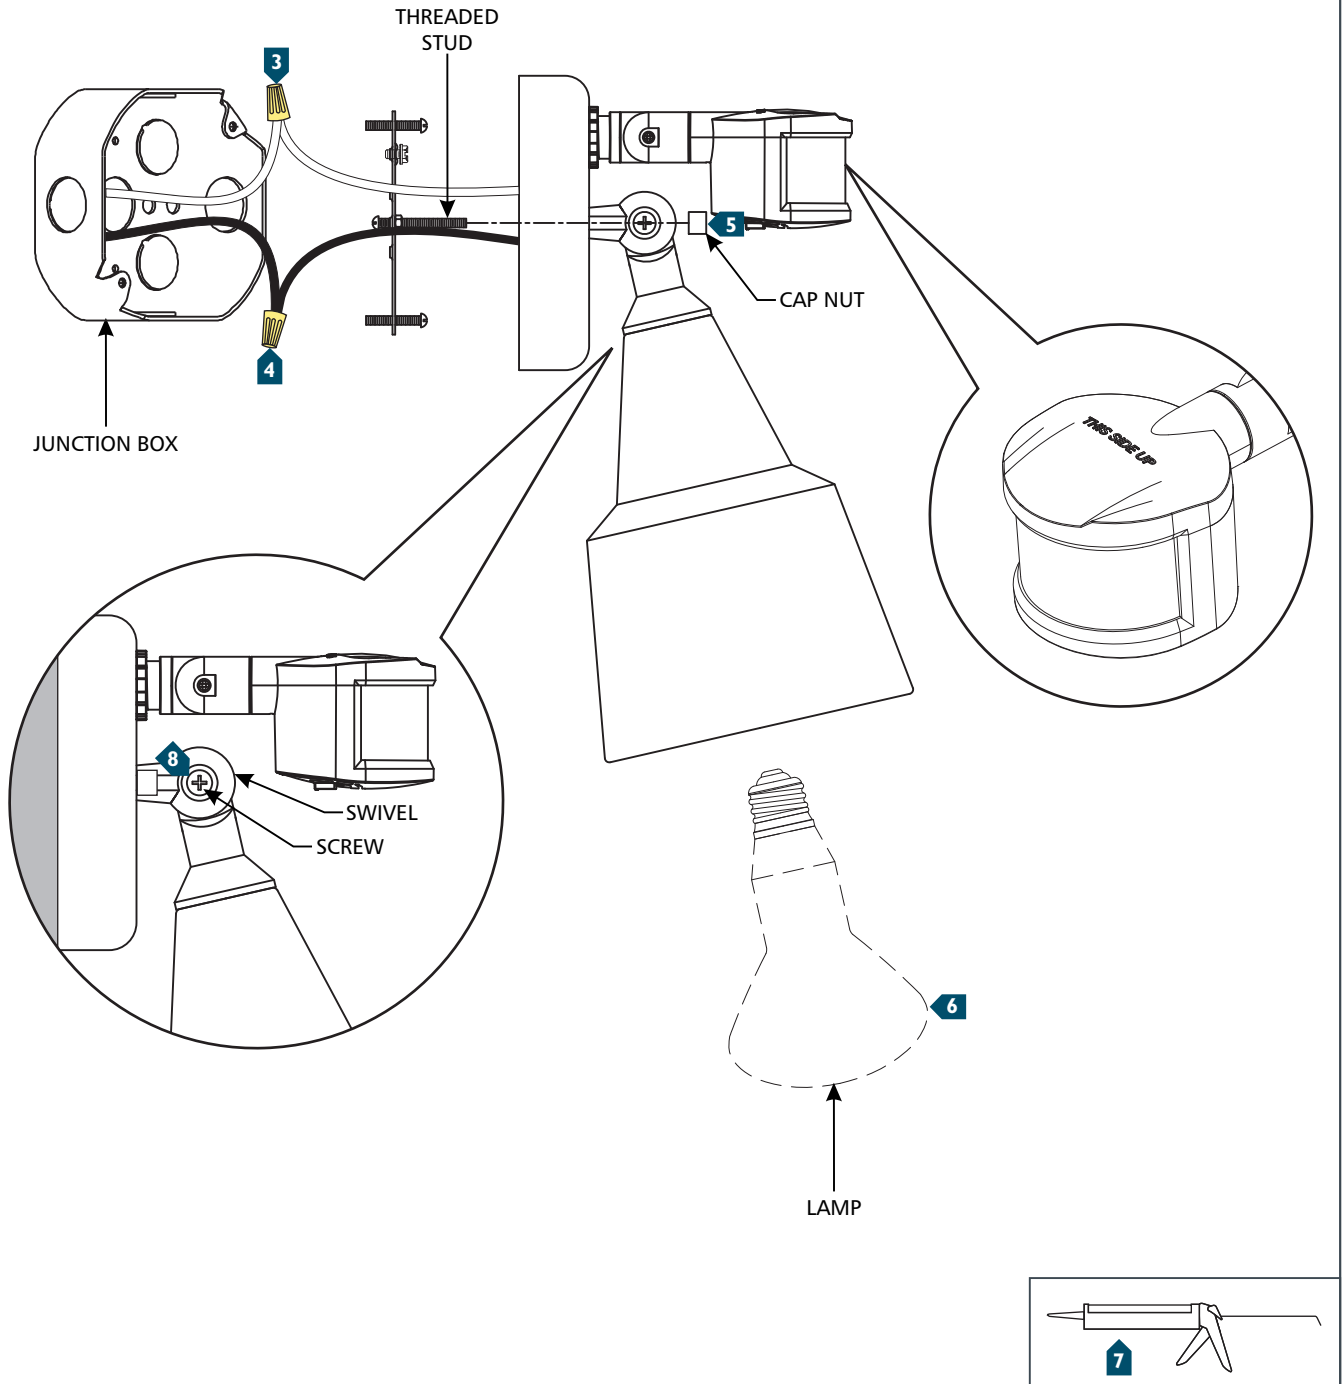

- 1** Secure the mounting plate to the junction box.
- 2** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 3** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 4** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 5** Neatly place all the wires into the junction box, place the fixture base onto the mounting plate, and secure it in place by screwing cap nut onto the mounting stud.
- 6** Screw the lamp(s) into the socket(s). Refer to the label on the socket for Max Wattage Information.
- 7** For wet locations, caulk around the base of the fixture with waterproof construction sealant.
- 8** Adjust the light by loosening the screw on the swivel, adjusting the light as desired, then re-tightening the screw to secure in place.  
**NOTE: The lamp must be aimed down at a minimum of 30° below horizontal.**

**NOTE: Only install the fixture with sensor pointing downward and note the "This Side Up" marking for orientation.**