

# Traverse Flex

14620S

I.0

## GENERATION LIGHTING CEILING

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


This instruction shows a typical installation.

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

**SAVE THESE INSTRUCTIONS!**

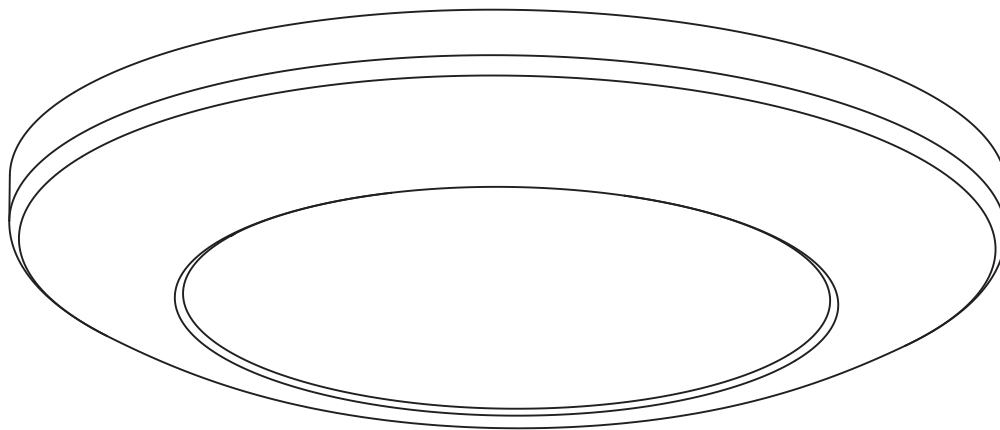


GENERATION LIGHTING

7400 Linder Ave., Skokie, IL 60077

T 847.410.4400 | F 847.410.4500

[www.generationlighting.com](http://www.generationlighting.com)

## Install the Fixture

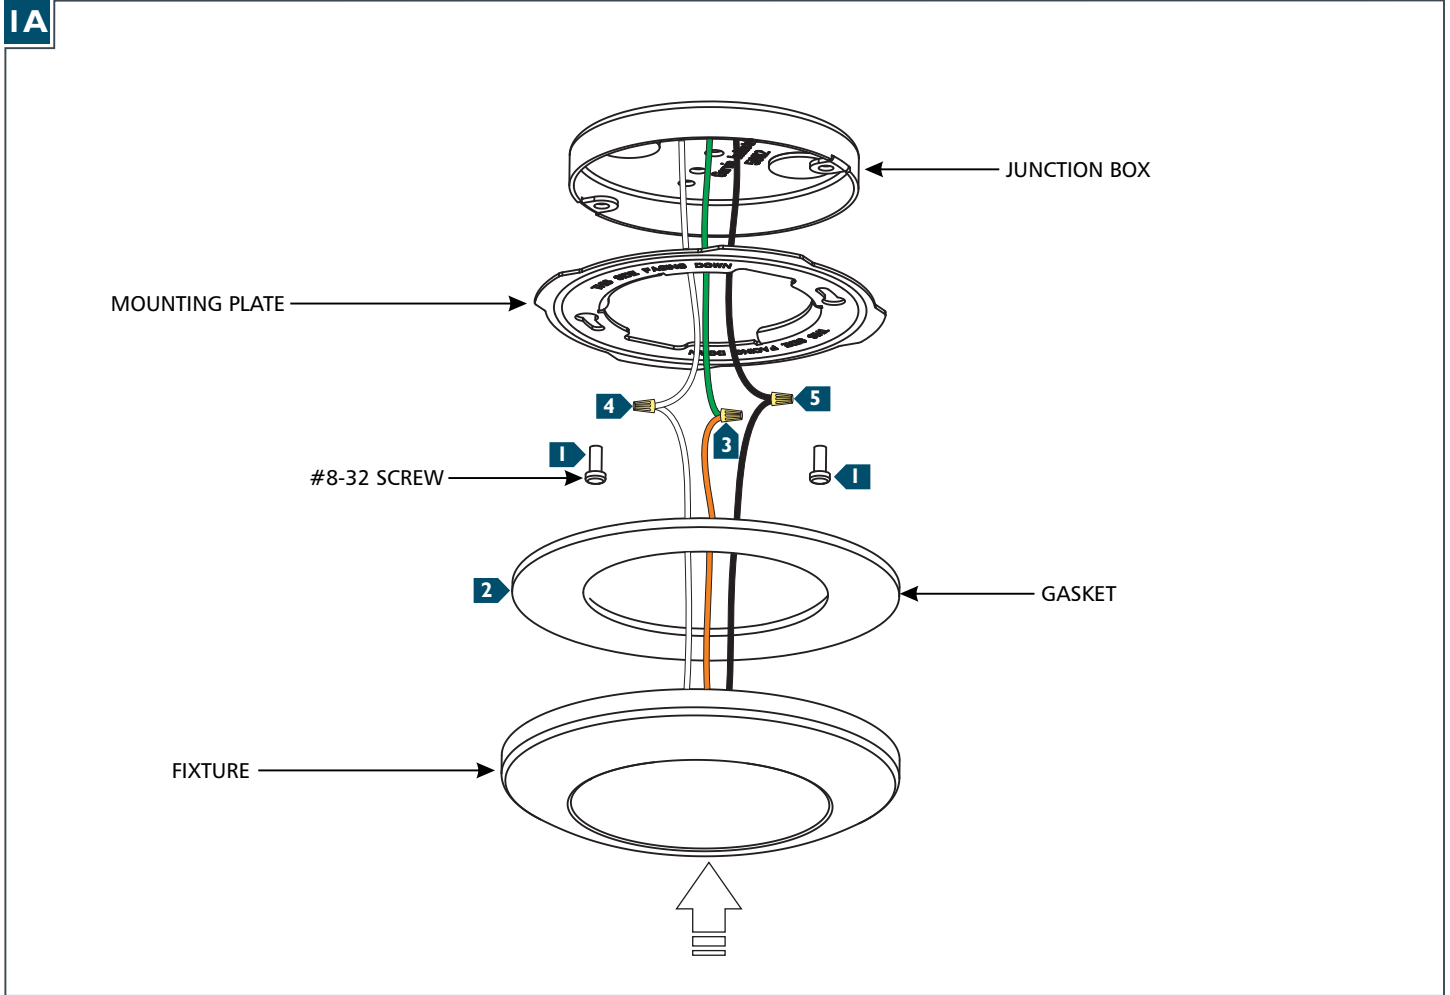

- 1 Ensure the mounting plate is facing the correct direction according to the markings and install it onto the junction box using the #8-32 screws.
- 2 Place the gasket onto the fixture.
- 3 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 4 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 5 Connect the black fixture wire to the hot power line wire with a wire nut.
- 6 Properly place the wires and wire nuts into the junction box, align the fixture so that the key on the fixture is aligned to the slot on the mounting plate, finally push it in until the springs snap in place. Note: the mounting plate screws may be adjusted to ensure the fixture is flush to the ceiling.