

ALBEE SMALL, MEDIUM & LARGE FLUSH MOUNTS

GLF1032; GLF1041; GLF1053

General Product Information













Suggested/Required Tools




Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

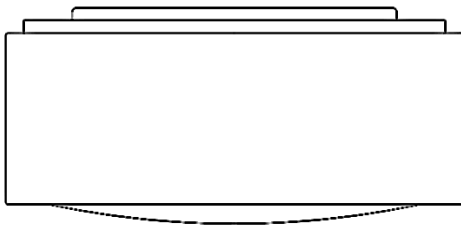

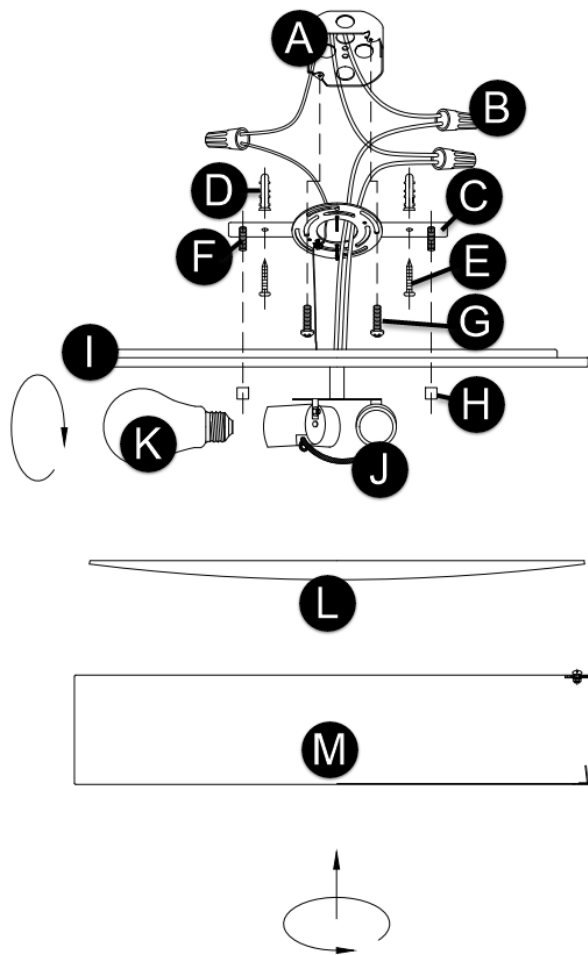

FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Mounting Plate
- D. Anchors (GLF1032, GLF1053 only)
- E. Anchor Screws (GLF1032, GLF1053 only)
- F. Mounting Studs
- G. Mounting Screws
- H. Cap Nuts
- I. Fixture Base
- J. Socket(s)
- K. Bulb(s)
- L. Diffuser
- M. Shade & Tabs

INSTRUCTIONS

I. Preparing the Fixture

1. Separate the mounting plate from the fixture base.
2. For GLF1032 and GLF1053 only, install the anchors as follows:
 - a) Place the mounting plate on the junction box to trace and mark the locations for the anchor holes. Ensure that they are level.
 - b) Use an electric drill to drill the marked holes.
 - c) Insert the anchors into the holes.
3. Install the mounting studs with their heads facing the junction box and in alignment with the holes in the fixture base so that they protrude downward.
4. Install the mounting plate to the junction box and secure it using the mounting screws. For GLF1032 and GLF1053 only, further secure the mounting plate by installing the anchor screws into the anchors.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot (black, smooth) fixture wire to hot power line wire
 - b) Neutral (white, textured) fixture wire to neutral power line wire
4. Carefully tuck all the wires into the junction box.

III. Installing the Fixture

1. Align the holes in the fixture base with the mounting studs on the mounting plate and push upwards so that they poke through the holes in the fixture base. Screw the cap nuts over the mounting studs to secure the fixture.
2. Screw the bulb(s) into the socket(s). Refer to the socket label for max wattage information.
3. Gently slide the diffuser into the shade and secure it in place with the tabs. Align the shade's top screws with the keyholes on the fixture ceiling pan and twist to secure the shade in place.