GERBER


GS-557-S

GOOGS557S

TREYSTA™
Tub and Shower Faucet Rough-In Valve Assembly

SPECIFICATIONS

Use with trim kits for: GERBER danze by GERBER

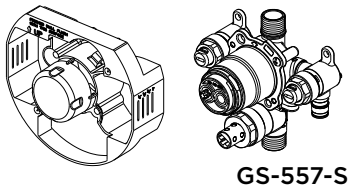

GS-557-S

Features/Benefits


- Includes forged valve body, plaster guard and innovative pressure test cap
- Connection Type: 1/2” F1960 (cold expansion) PEX inlets, 1/2” IPS/sweat outlets
- Includes 1/4 turn service stops
- Installed rough-in can be pressure tested to 150PSI (air or water), mixed or isolated inlets, using included pressure test plug
- Accommodates standard, back-to-back, and thin wall installations
- Integrated, easy-access mounting system
- Treysta cartridge ships with trim, sold separately


Catalog Numbers

GS-557-S F1960 inlets with stops

Standards & Certifications



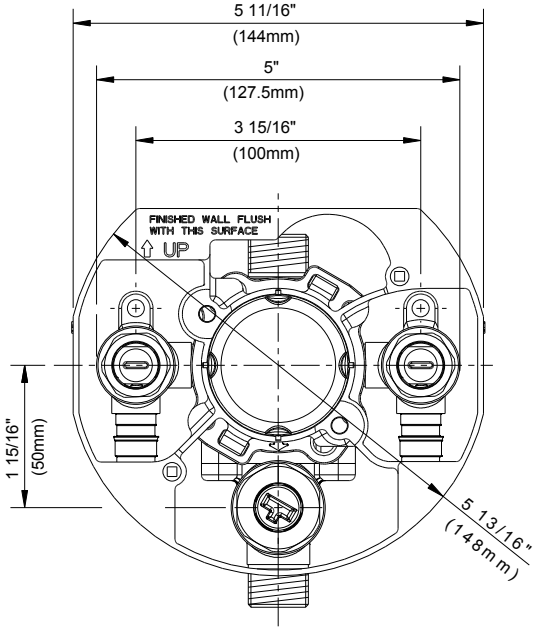

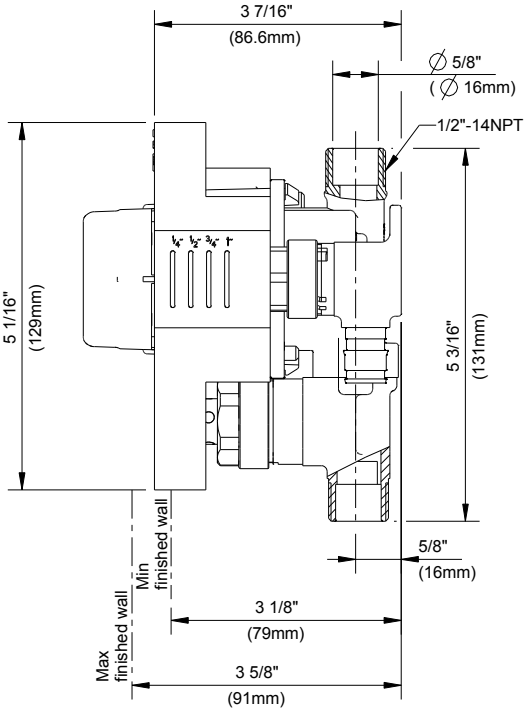

Submittal Information:

Name: _____ Contractor: _____

Location: _____ Contact #: _____

WARRANTY: Gerber products are covered by a manufacturer’s limited warranty for manufacturing defects.