


Assembly Instructions: 1035-8 CH (Neeva)

IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

For Customer Service, contact the place of purchase to arrange for replacement parts.

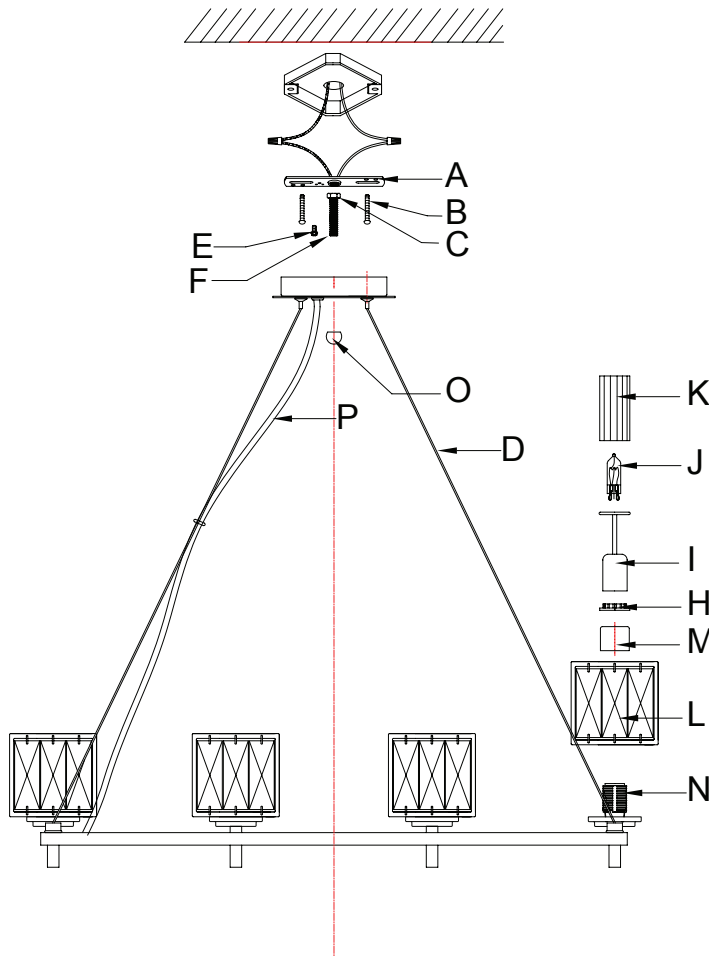


PREPARING FOR INSTALLATION (CONT.)

By measuring, determine the correct amount of steel cable wire (D) needed for proper hanging height. To shorten the fixture, trim the wires to the desired length plus at least 8 to 10 inches. Put wire (P) through the hole in the center of canopy (G). Put each of the steel cable wires (D) through the hole in each corresponding corner of the canopy. See the diagram. Adjust the cables until the fixture is level.

CONNECTING THE WIRES

Support the fixture's weight while completing the wiring. Cut away any excess wires. Attach the fixture's wires to the power supply wires from the junction box. Connect black to black (or smooth); white to white (or ribbed); ground to ground (green or copper). Twist the ends of the wire pairs together, then twist on a wire connector. Make sure all twists are in the same direction. If there is no ground wire (green or copper) from the junction box, locate ground screw (E) on mounting strap (B) and wrap the fixture's ground wire around the green ground screw (E). Use a screwdriver to secure ground screw (E) onto the mounting bracket. Tuck all wires neatly into the junction box. Adjust the cables (O) until the fixture is level.

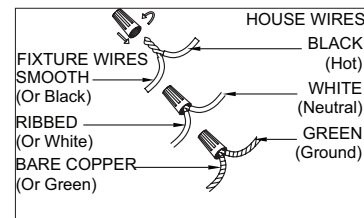

PREPARING FOR INSTALLATION

Carefully remove all of the contents from the carton. See the important notes above. Shut off the power at the circuit breaker and completely remove the old fixture from the ceiling, including the old mounting strap.

From the parts bag remove the mounting strap assembly. One end of threaded nipple (F) should be attached to mounting strap (A) with hex nut (C) in place. Attach mounting strap (A) to the junction box using mounting screws (B) and a screwdriver. Tighten securely.

FINISHING THE INSTALLATION

Push canopy (G) up to the ceiling so that threaded nipple (F) protrudes through the hole in the center of canopy (G). Secure canopy (G) to the ceiling by tightly threading decorative nut (O) onto the exposed threads of nipple (F).

To attach the crystal shade: slide shades (L) over sockets (N) and secure in place with spacers (M) and socket rings (H) using socket tool (I) to tightly thread socket rings (H).

Install the provided halogen bulbs (J).

Bulb Note: Use a tissue or paper towel to hold the bulb and push down into the socket. Oils and dirt can cause the bulb life to shorten. Rubbing alcohol is recommended to clean dirty bulbs.

Then, thread bulb shields (K) onto sockets (N).

Your installation is now complete. Turn on the power and test the fixture.

CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.