


# Assembly Instructions: C130-04-CH (Clio)

## IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

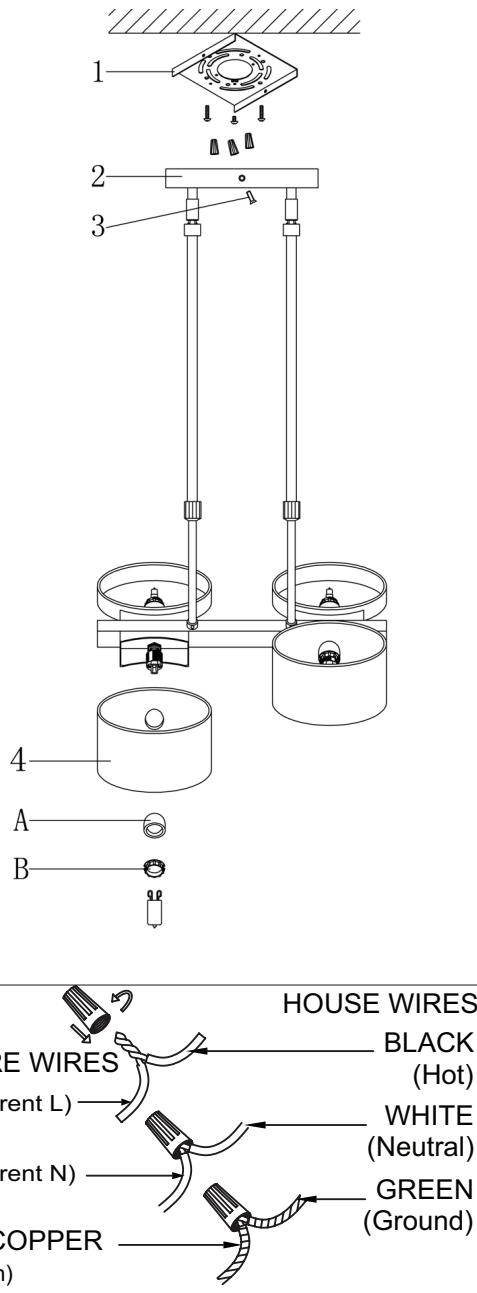

## HANGING THE FIXTURE

Mounting strap (1) contains several holes. Find the pair of holes that matches the spacing of the holes on the junction box. Place mounting strap (1) over the junction box and attach using screws and a screwdriver.

## CONNECTING THE WIRES

Attach the power supply wires from the junction box to the fixture's connection wires. Connect black to transparent L and white to transparent N. Attach the ground wire (green or copper) from the junction box to the fixture ground wire. If there is no ground wire at the junction box, wrap the fixture ground wire to the green ground screw. Twist the wires together in the same direction you twist the wire connectors onto the wires and tuck the wires into the junction box.

## FINISHING THE INSTALLATION

Measure to determine the proper hanging height. Twist the locking rings to adjust the length of the telescopic rods.

Place canopy (2) over the mounting strap and secure by screwing the mounting screw (3) into the canopy until the fixture is secure. Install glass shades (4) using spacers (A) and socket rings (B). Lastly, install the provided halogen bulbs using a dry cloth. See bulb note below.

Bulb note: Use a tissue or paper towel to hold the bulb and push into the socket. Oils and dirt can cause the bulb life to shorten. Rubbing alcohol is recommended to clean the bulbs when needed.

**For Customer Service, contact the place of purchase to arrange for replacement parts.**

## CLEANING ADVICE:

- To avoid scratches, always use dry, smooth cloths to dust the fixture.
- Never use wet or abrasive cleaning products to clean the light fixture.
- For major cleaning, please disconnect the power at the main switch.

