
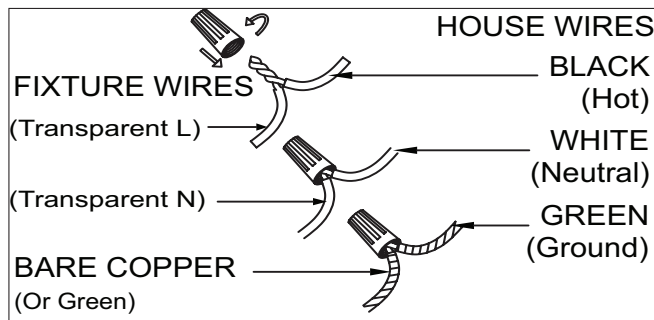


Assembly Instructions: C165-L6-CH (Volga)

IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

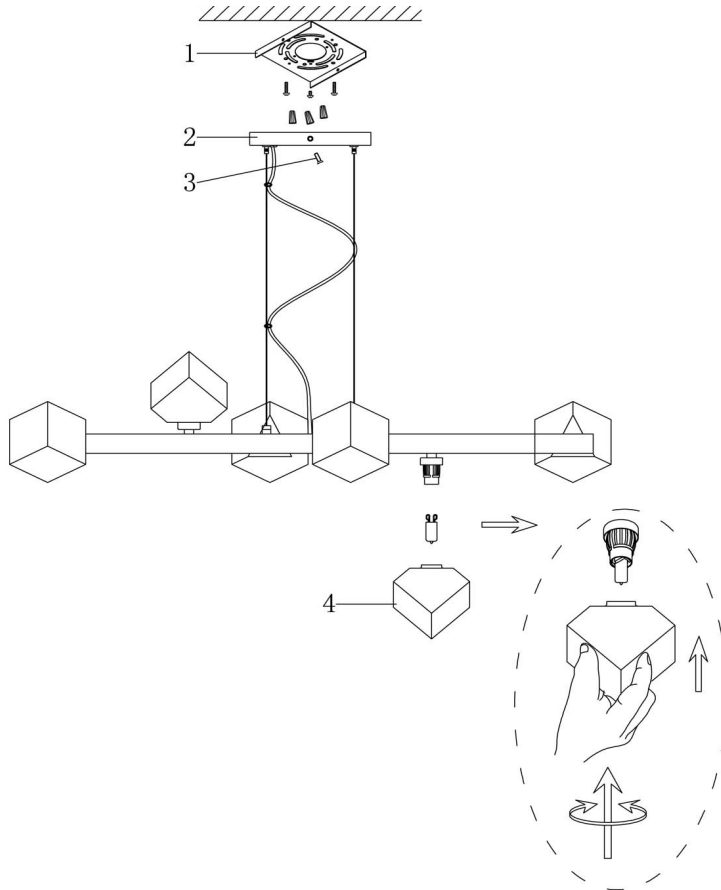

CLEANING ADVICE:

- To avoid scratches, always use dry, smooth cloths to dust the fixture.
- Never use wet or abrasive cleaning products to clean the light fixture.
- For major cleaning, please disconnect the power at the main switch.

HANGING THE FIXTURE

Mounting strap (1) contains several holes. Find the pair of holes that matches the spacing of the holes on the junction box. Place mounting strap (1) over the junction box and attach using screws and a screwdriver.

CONNECTING THE WIRES

Attach the power supply wires from the junction box to the fixture's connection wires. Connect black to transparent L and white to transparent N. Attach the ground wire (green or copper) to the ground wire from the junction box. If there is no ground wire at the junction box, attach the fixture ground wire to the green ground screw. Twist the wires together in the same direction that you twist the wire connectors onto the wires and tuck the wires into the junction box.

FINISHING THE INSTALLATION

Place canopy (2) over mounting strap (1) and secure by screwing the mounting screws (3) into the canopy until the canopy is secure. Install the provided halogen bulbs. See the bulb note below. **Install glass (4) by slowly pushing the glass over the socket and onto the locking spring.**

Bulb note: Use a paper towel to hold the bulb and push down into socket. Oils or dirt can cause the bulb life to shorten. Rubbing alcohol is recommended to clean the bulbs if dirty.

For Customer Service, contact the place of purchase to arrange for replacement parts.

