
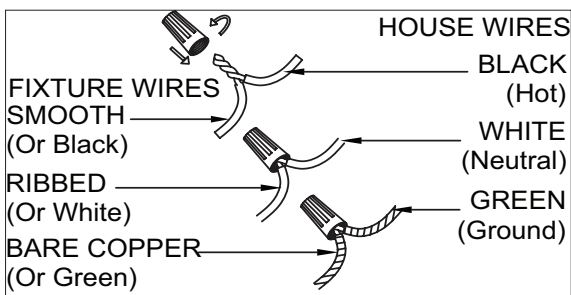


# Assembly Instructions: C177-L3-CH (Solal)

## IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

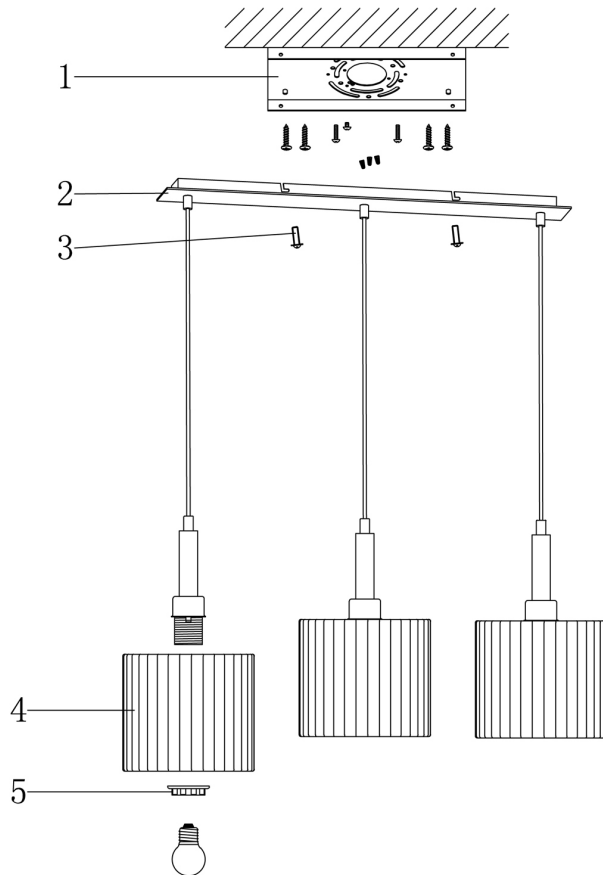

## HANGING THE FIXTURE

Mounting strap contains several holes. Find the pair of holes that matches the spacing of the holes on the junction box.

## CONNECTING THE WIRES

Attach the power supply wires from the junction box to the fixture's connection wires. Connect black to black (smooth) and white to white (ribbed). Attach the ground wire (green or copper) to the ground wire from the junction box. If there is no ground wire at the junction box, attach the fixture ground wire to the green ground screw. Twist the wires together in the same direction that you twist the wire connectors onto the wires and tuck the wires into the junction box.

## FINISHING THE INSTALLATION

Attach bracket (2) to the mounting strap (1) using mounting screws (3) and a screwdriver. The bracket has key holes on the sides. Slide the key holes over screws (3) that protrude from mounting strap (1). Tighten the screws to secure the fixture.

Install lamp shade (4) to the fixture body. Secure in place using socket ring (5). Install the bulbs.

(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)

YOUR INSTALLATION IS NOW COMPLETE. RESTORE POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.

**For Customer Service, contact the place of purchase to arrange for replacement parts.**

## CLEANING ADVICE:

- To avoid scratches, always use dry, smooth cloths to dust the fixture.
- Never use wet or abrasive cleaning products to clean the light fixture.
- For major cleaning, please disconnect the power at the main switch.

