


# Assembly Instructions: 9808-2W (Seaport)

## IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

For Customer Service, please contact the place of purchase.

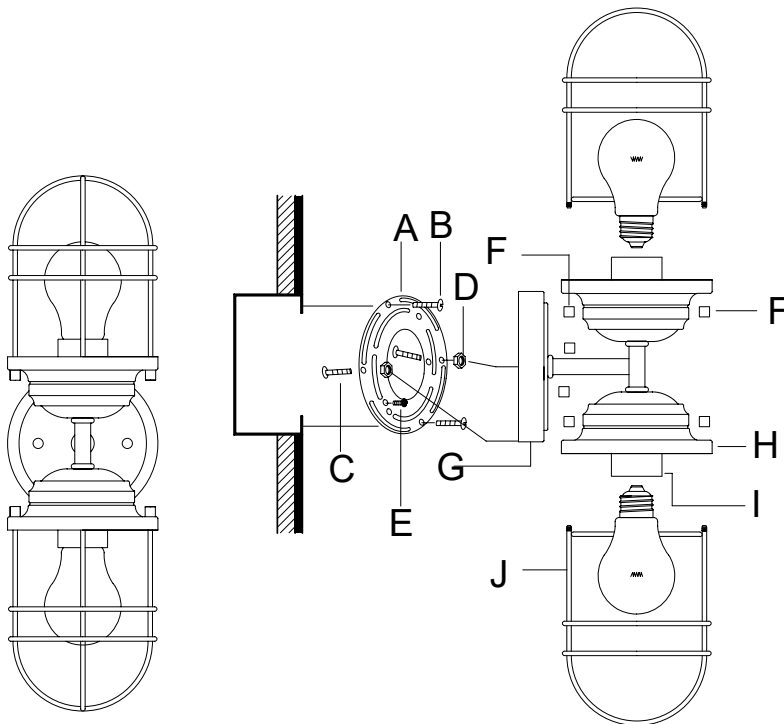

## PREPARING FOR INSTALLATION

Remove all of the contents from the carton. See the important notes above. Shut off the power at the circuit breaker and completely remove the old fixture from the wall, including the old mounting strap.

1. Mounting strap (A) contains several pairs of threaded holes and two mounting screws (B). Two more mounting screws (C) should also be attached to the mounting strap (A). You may need to tighten hex nuts (D) to hold the mounting screws (C) in place.
2. Place mounting strap (A) against the existing junction box. Place backplate (G) over the mounting strap to line up the mounting screws (C) with the holes in backplate (G). This will ensure you are hanging the fixture straight.
3. Remove the backplate (G) and secure mounting strap (A) to the junction box using mounting screws (B) and a screw driver. Tighten the screws securely.
4. Pull house wires through the center of the mounting strap (A).

## CONNECTING THE WIRES

5. Attach the fixture's wires to the power supply wires from the junction box. Connect black to black (or smooth); white to white (or ribbed); ground to ground (green or copper). Twist the ends of the wire pairs together, then twist on a wire connector. Make sure all twists are in the same direction. If there is no ground wire (green or copper) from the junction box, locate ground screw (E) on mounting strap (A) and wrap the fixture's ground wire around the green ground screw (E). Use a screwdriver to secure ground screw (E) onto the mounting bracket. Tuck all wires neatly into the junction box.

How to Identify the Fixture's Wires			
Hot	Neutral	Ground	
Smooth	Ribbed	Bare Metal, Green, or	
Black	White	Green Inner Thread	
Black Inner Thread	White Inner Thread		

## FINISHING THE INSTALLATION

6. Place the fixture's backplate (G) over mounting strap (A) so that the holes in mounting strap (A) line up with the holes in backplate (G). Mounting screws (C) should protrude out from the backplate (G).
7. Thread deco nuts (F) onto the exposed threads of mounting screws (C) until backplate (G) is snug against the wall.
8. Install light bulbs (not provided) based on the fixture's specifications. Do not exceed the maximum wattage.
9. Slide metal cage (J) up to the bottom of cap (H) and into sockets (I). Secure the metal cage (J) in place with the remaining decorative nuts (F).

Your installation is complete. Turn on the power and test the fixture.

## CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.