

 **psi**

max. 125
20 72.5 20


 **bar**

max. 8,6
1,4 5 1,4








 **°F**

max. 158°
 140°

 **°C**


max. 70°
 60°

Thread Seal Tape
Ruban pour joint filetés
Cinta de roscas

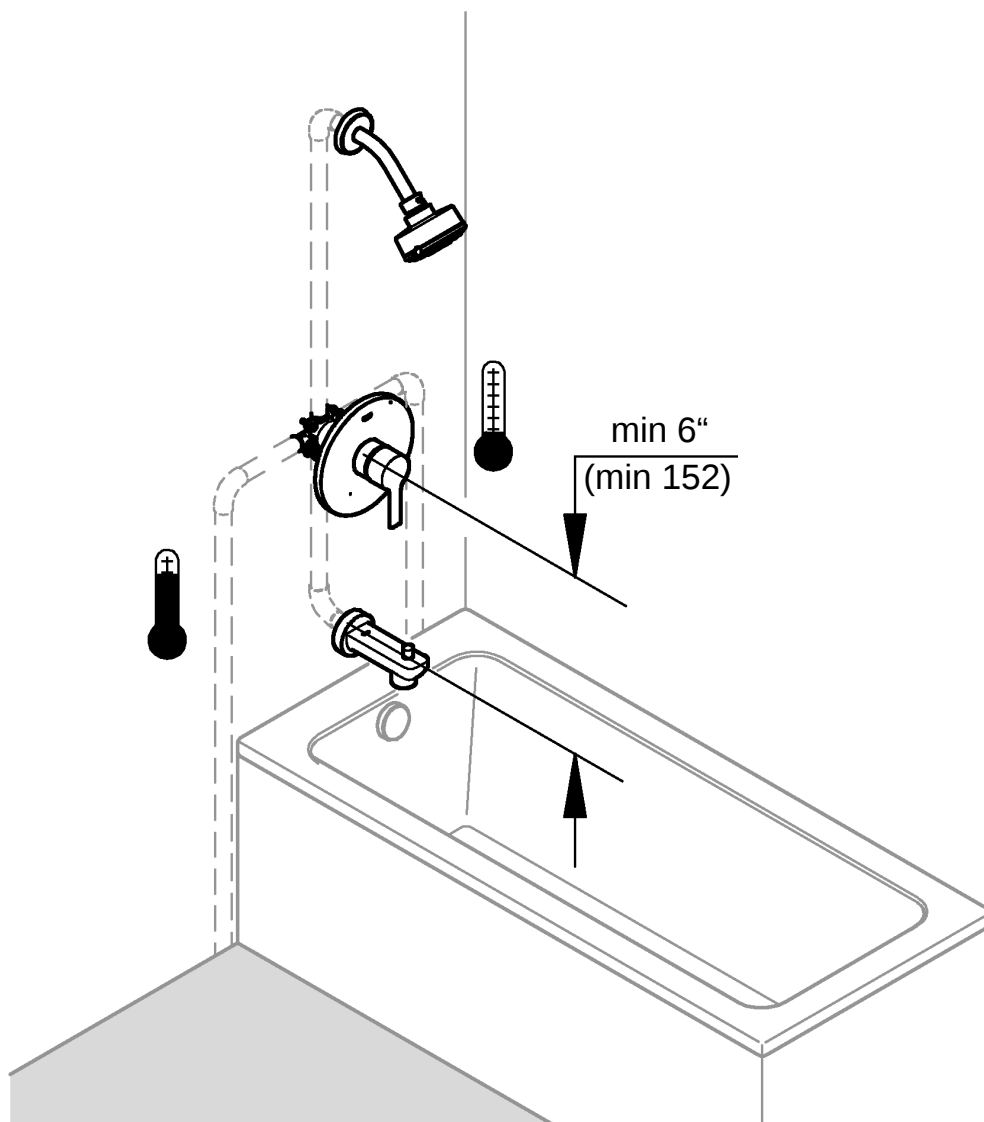





1

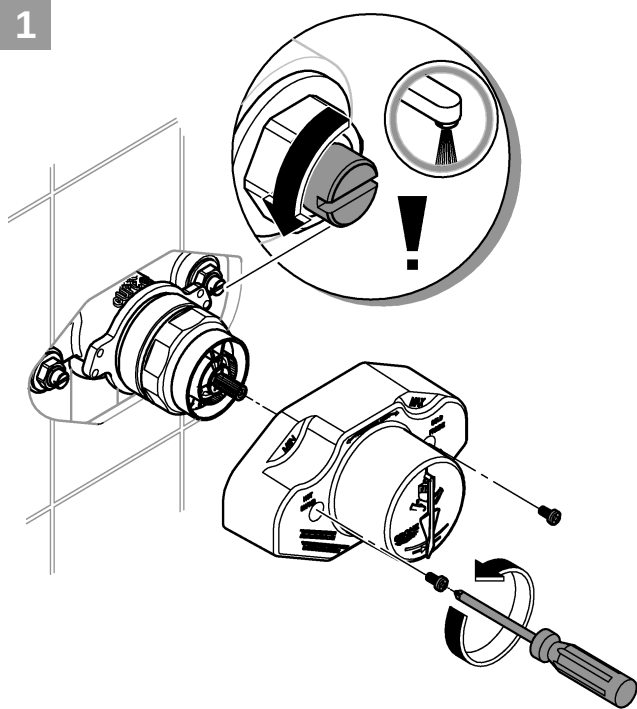


2

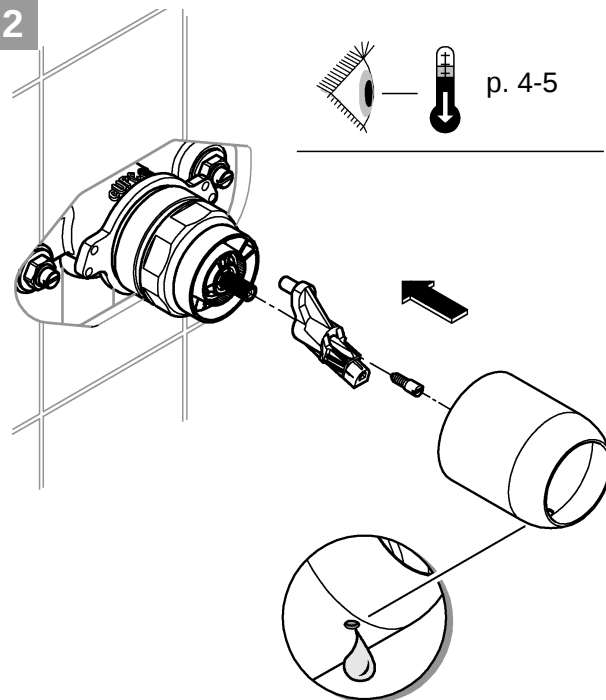

3

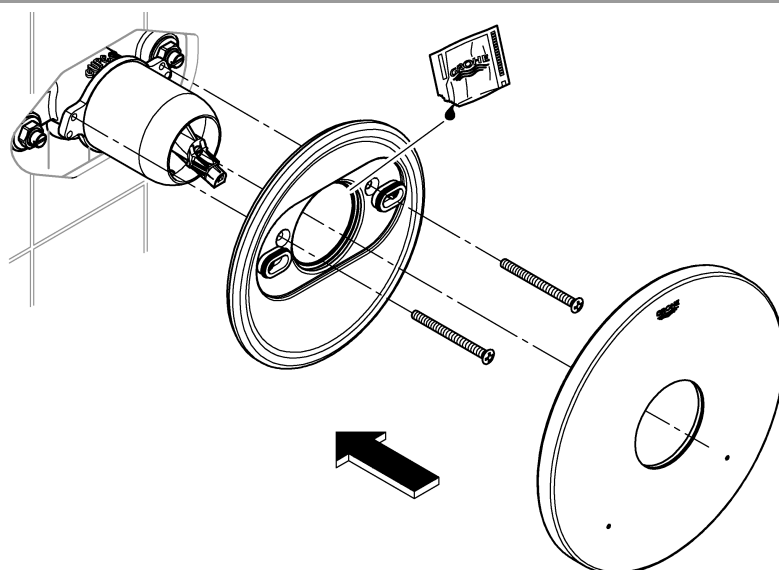


4

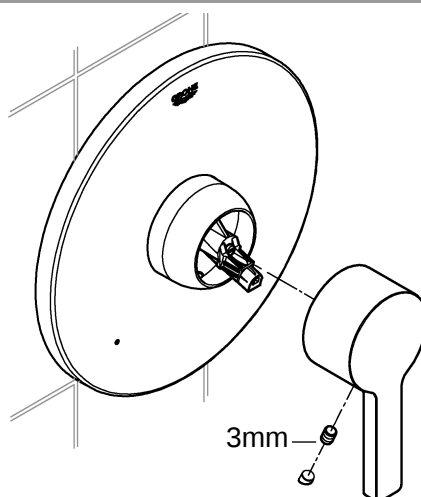




5


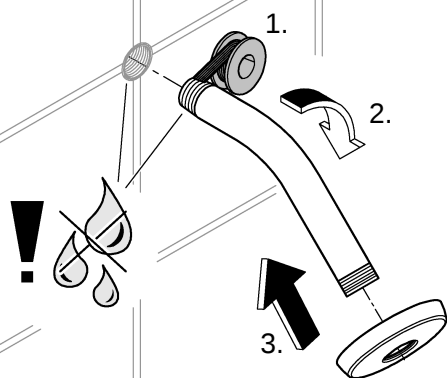


Only for 23 826 and 35095
Seulement pour 23 826 et 35095
Sólo para 23 826 y 35095


7

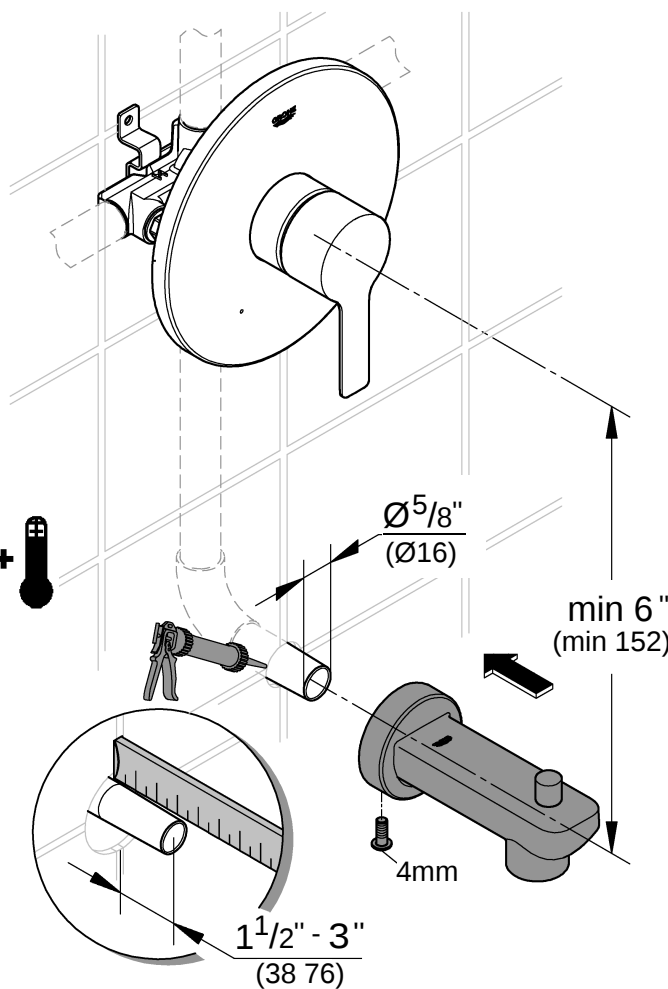

6

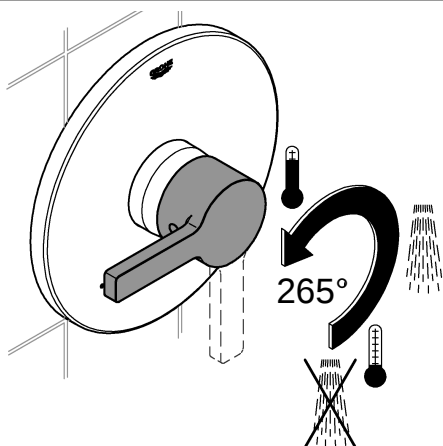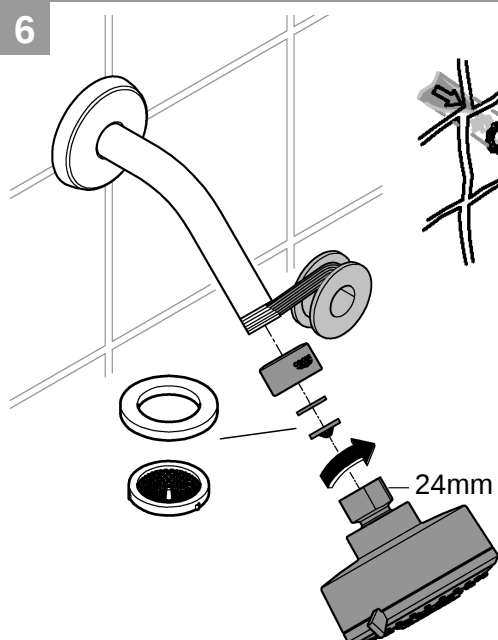


3 bar:	43 psi:
15 l/min	4.0 gpm

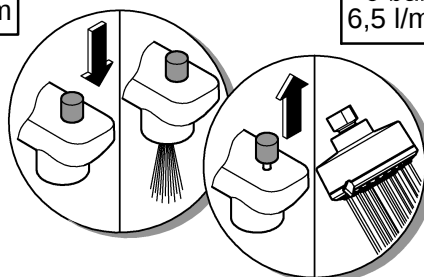


3 bar:	43 psi:
6,5 l/min	1,7 gpm




1

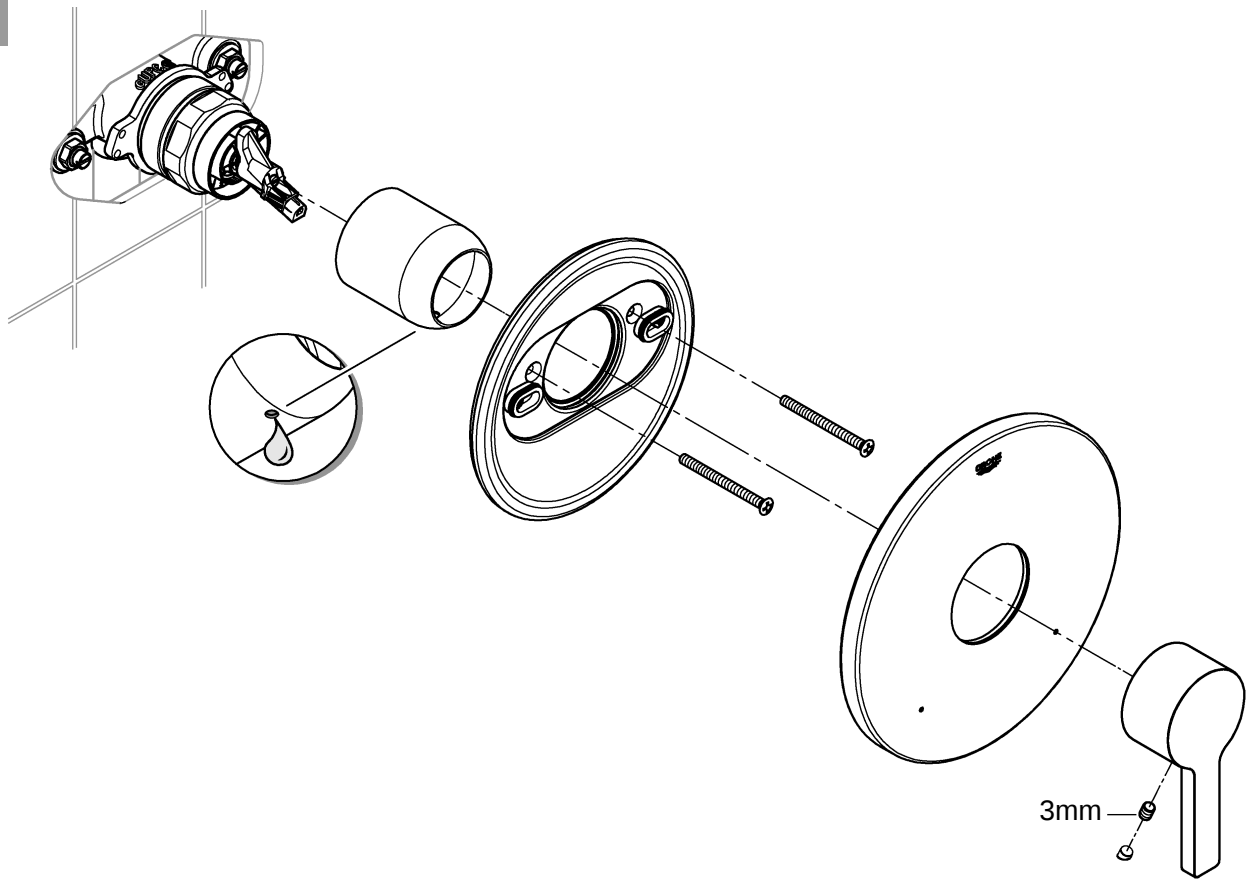

2

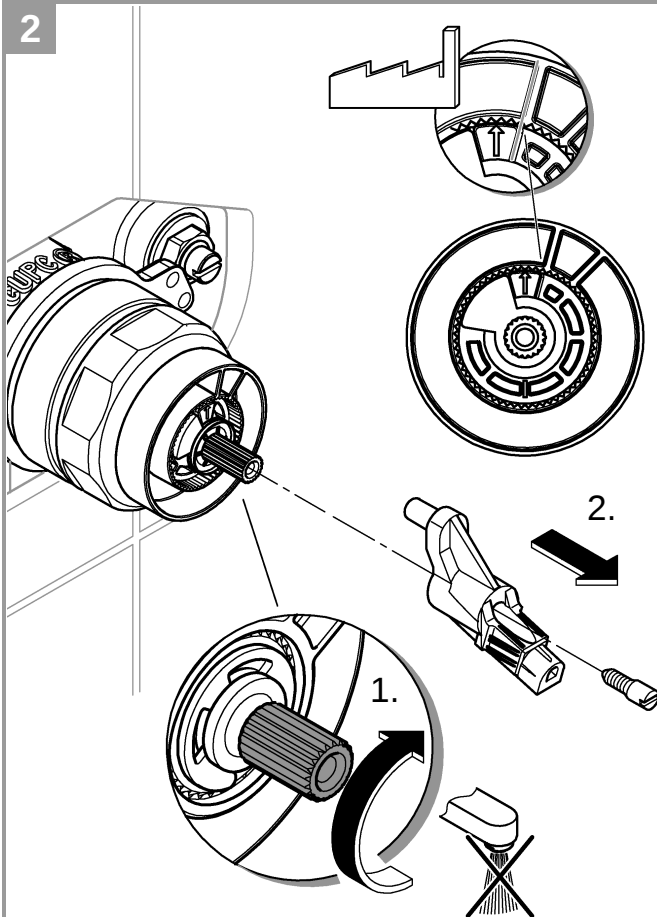


3

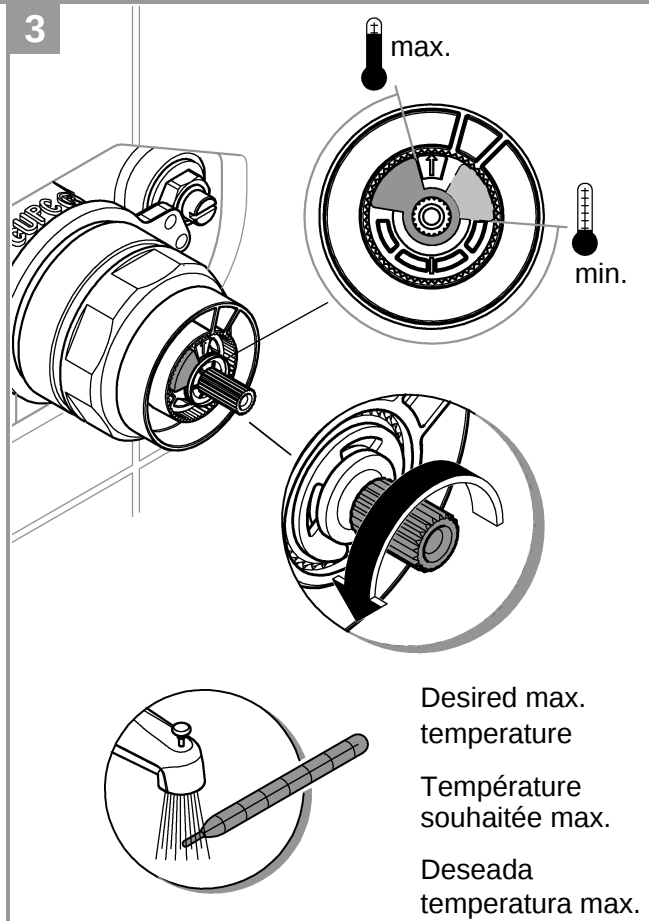





4

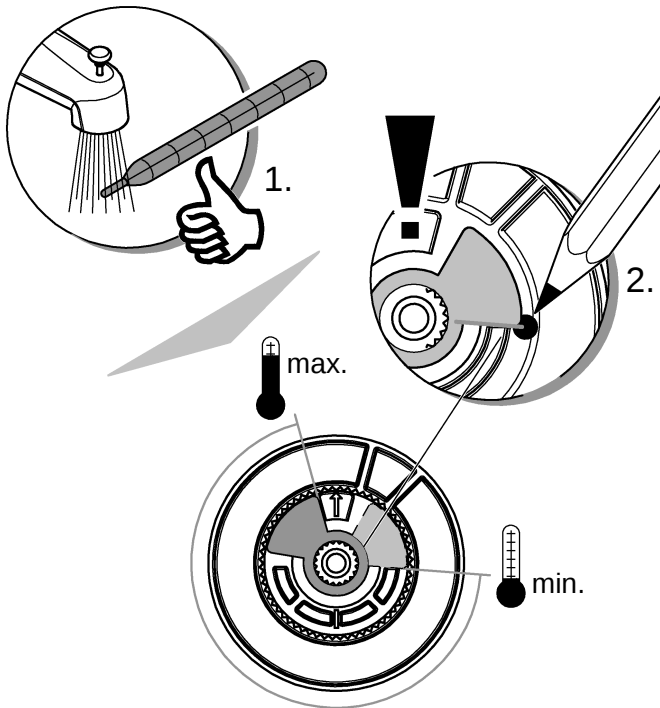


5

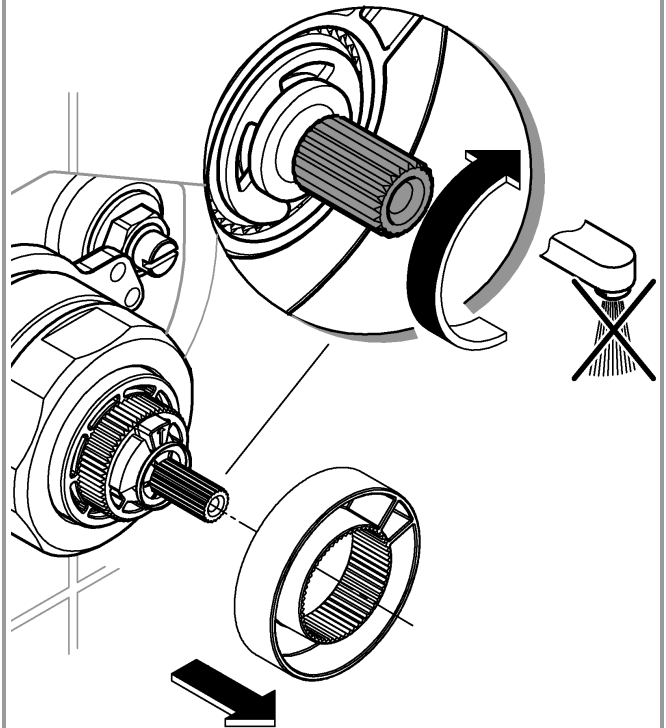

6

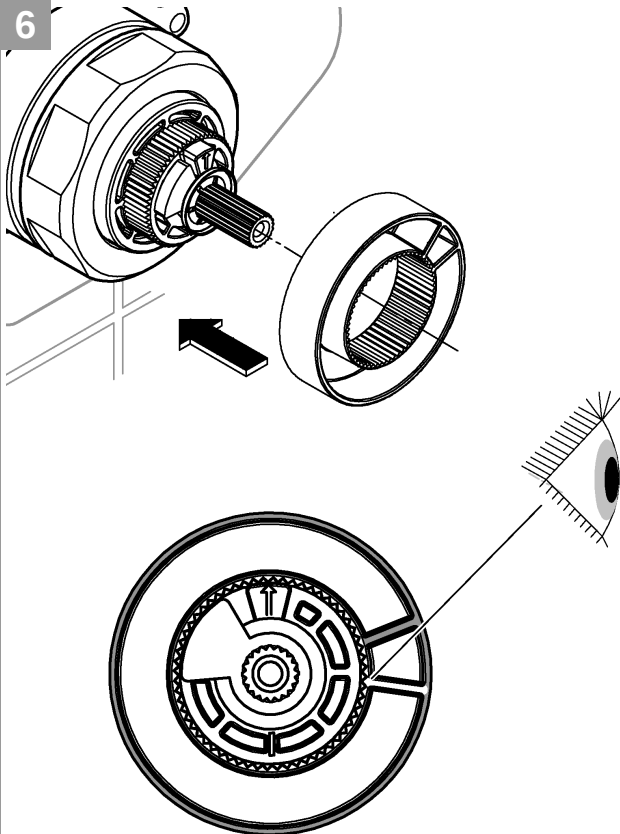


4




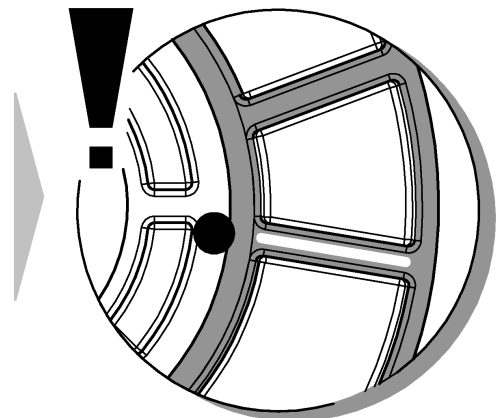





SpeedClean




Quick descaling
Détartrage rapide
Descalcificación rápida

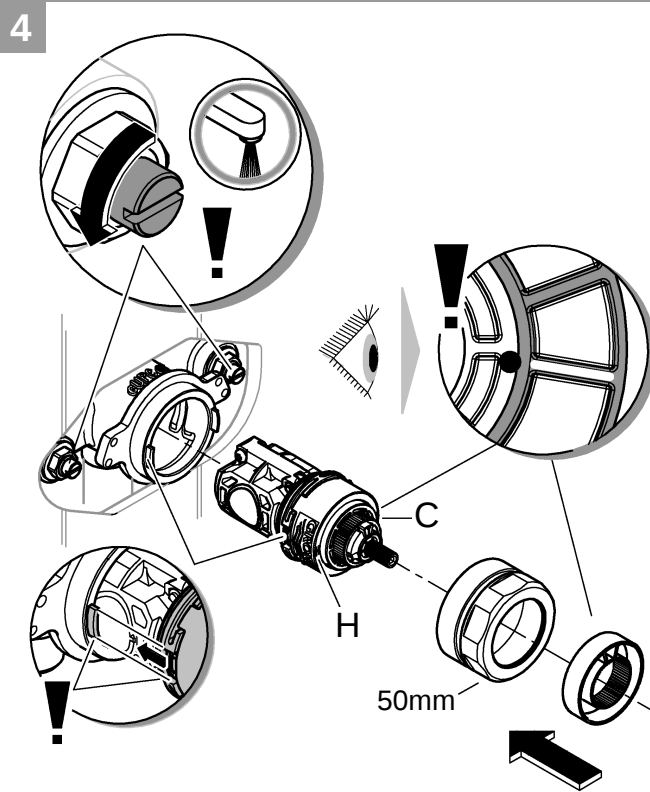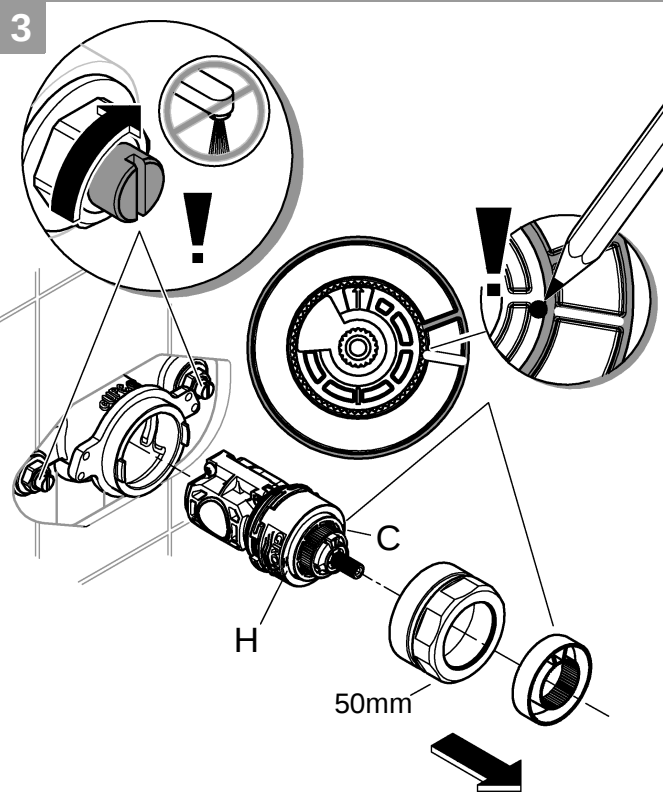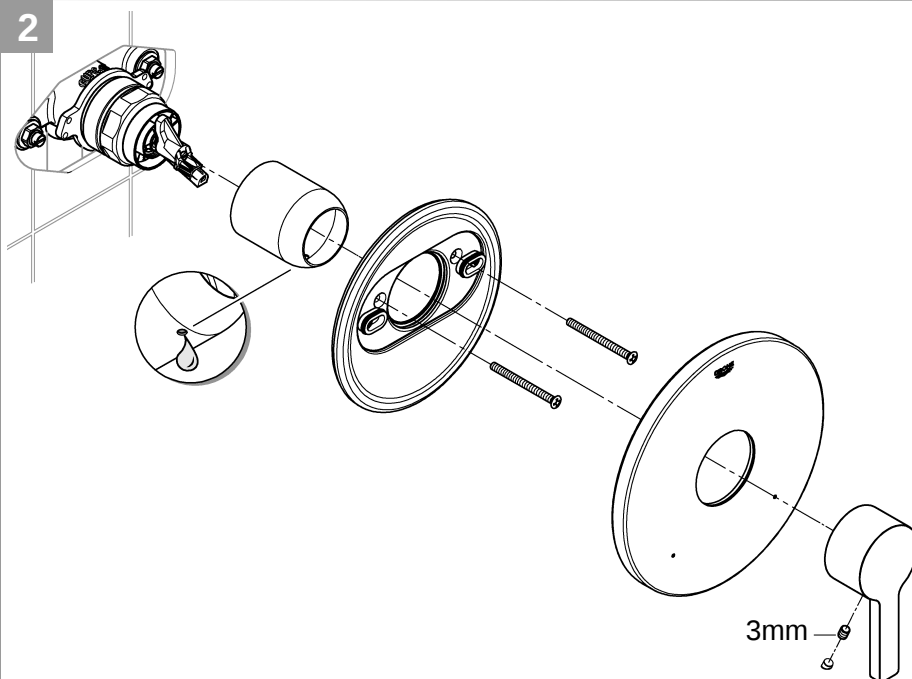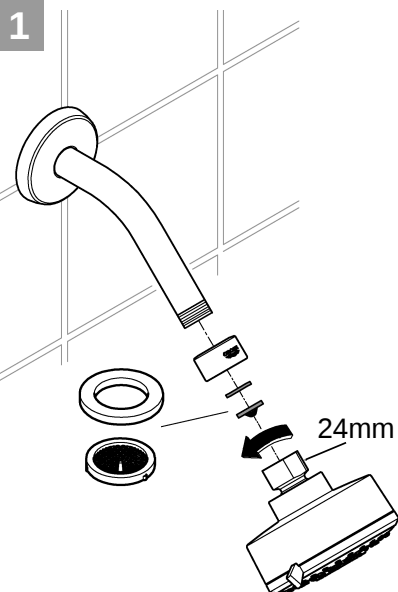


1

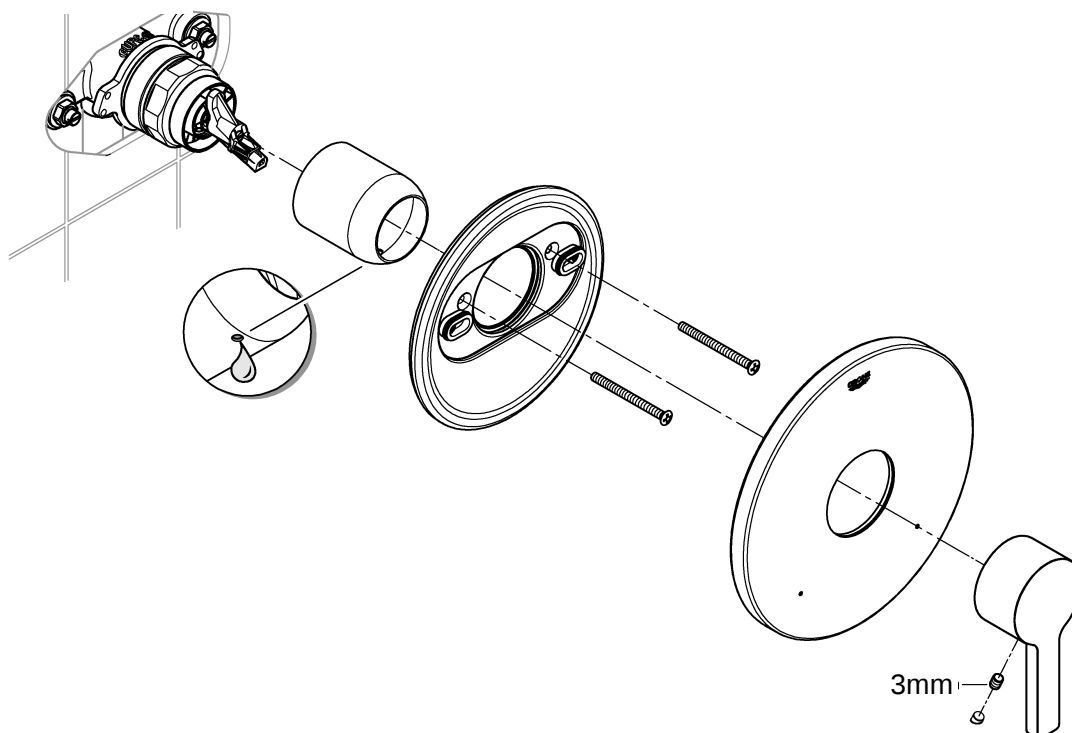

2

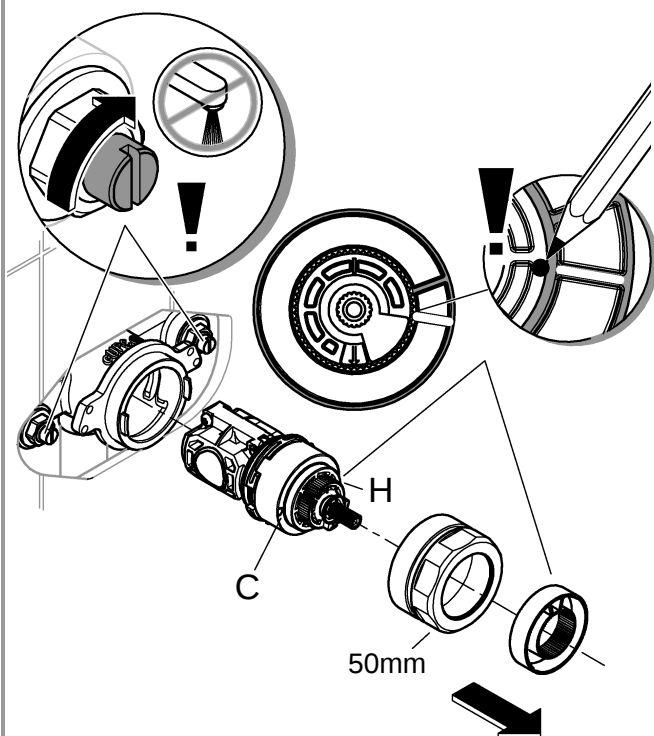


3

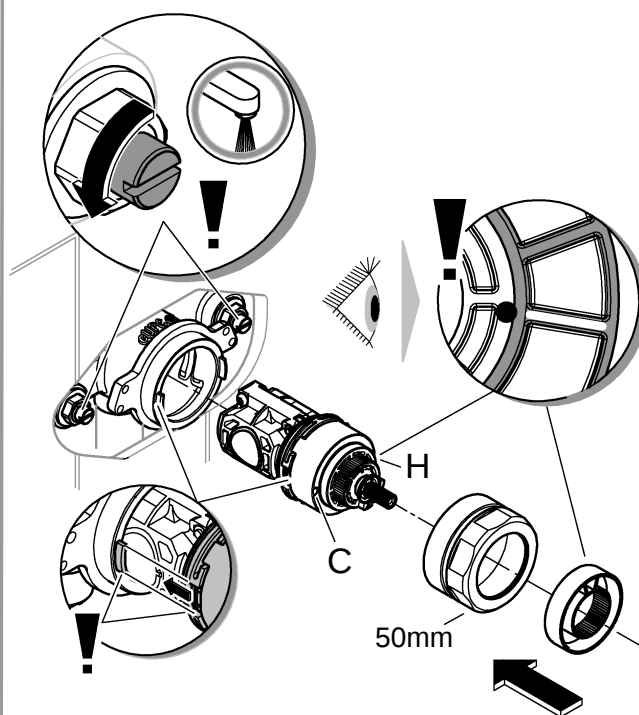



35 015

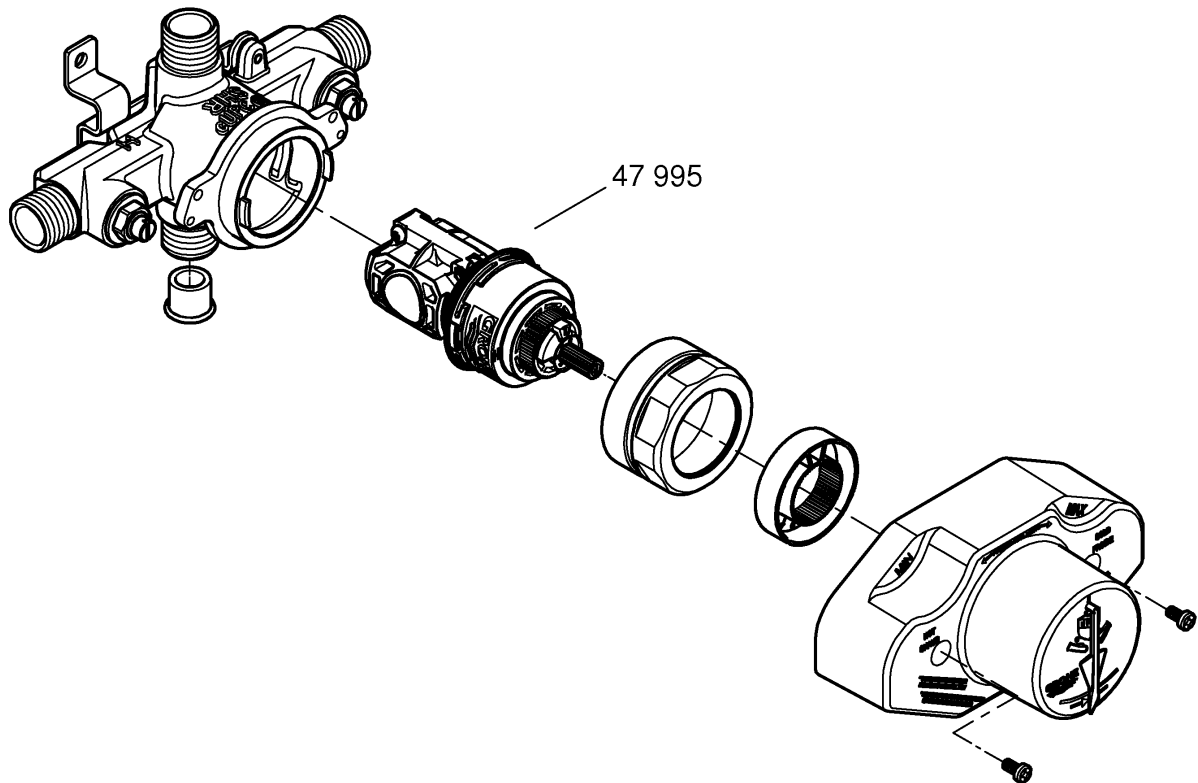

29 167

