


RETROFIT SYSTEM 210 Shower System

MODEL # 26123EN1

Pure Freude
an Wasser

GROHE

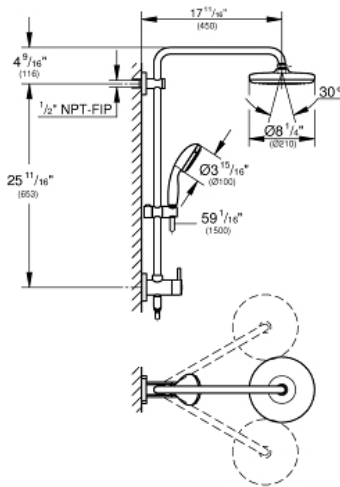

Product Description: RETROFIT SYSTEM 210 Shower System

Standard Specification:

- Consisting of:
 - 17 3/4" horizontal swivel shower arm
 - Switch between hand shower and shower head shower via built-in diverter
- Allows change between:
 - Head shower Tempesta 210 (26 409)
 - Spray pattern: Rain
 - With ball joint
 - Rotation angle $\pm 15^\circ$
 - Hand shower New Tempesta 100
- 2 Spray patterns:
 - 2 Adjustable spray patterns: Rain, Jet
 - Adjustable height bar with gliding element
 - Distance between diverter and upper bracket: 25 3/4" (653 mm)
 - Rotaflex shower hose (59") (28 417)
 - Angle adapter to prevent hose interfering with shower valve
- GROHE EcoJoy 1.75 gpm (6.6 l/min) flow limiter
- GROHE DreamSpray perfect spray pattern
- GROHE StarLight finish
- SpeedClean® anti-lime system
- Inner WaterGuide for a longer life
- Twistfree to prevent hose from twisting
- Min. recommended pressure: 15 psi
- System includes 2 back flow preventers
- Optional compensation disc (26 030) available for uneven wall installation
- Optional height extension (26 464) available for raising the shower head

Applicable Codes & Standards:

- Energy Policy Act of 1992
- ASME A112.18.1/CSA B125.1
- EPA WaterSense®

Pure Freude
an Wasser



- CalGreen

Color:

- 26123EN1 Brushed Nickel


GROHTHERM SMARTCONTROL Single Function Thermostatic Trim with Control Module

MODEL # 29140000

Pure Freude an Wasser

GROHE

GROHE America, Inc | 200 North Gary Avenue, Suite G, Roselle, IL 60172
Phone: +1 (800) 444-7643 | Fax: +1 (800) 225-2778 | us-customerservice@grohe.com

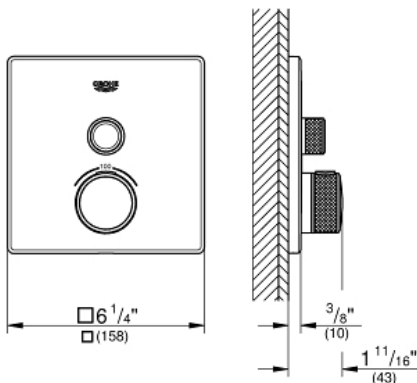

Product Description:

Single Function Thermostatic Trim with Control Module

Standard Specification:

- Final installation set for:
- Required rough-in-set sold separately (GROHE Rapido SmartBox 35 601 000)
- Metal wall escutcheon with **GROHE QuickFix** (covered escutcheon and shaft sealing, covered fixing), 6° angle adjustable
- 3/8" (10mm) thin profile escutcheon
- **GROHE StarLight** chrome finish
- SmartControl push for ON-OFF, turn for volume adjustment from EcoJoy to Full Flow
- Includes various icons to customize push buttons
- **GROHE TurboStat** Compact cartridge with wax thermoelement
- **GROHE SafeStop** safety button at 100°F/38°C
- Built-in check valve with dirt strainer
- Maximum flow performance: 7.7gpm (29L/min) @ 43.5 psi (3 bar)
- Optional flow reducer for CALGreen compliance included

Applicable Codes & Standards:

- ASME A112.18.1/CSA B125.1
- CalGreen

Color:

- 29140000 StarLight Chrome