


LadyLux Cafe 33 765 Stainless Steel pull-out



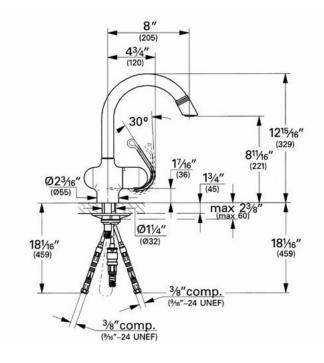

Description

DISCONTINUED PRODUCT-Limited Availability

Single-Handle kitchen pull-out 360-degree swivel spout Solid stainless steel formed body Ceramic cartridge 59" extractable hose 8 1/2" spout reach Quick installation system Stainless steel braided flexible supplies Integral check valves Single hole installation

Installation note: For full handle movement when mounted in front of a wall or backsplash, this faucet must be installed with no less than 3 1/4 inches of clearance between the faucet and backsplash or wall, unless the faucet is installed with the handle facing forward (handle oppposite the wall).

IAPMO File #1750

Flow Rate

2.2 at 60 psi (2.5 at 80 psi or 9.5 lpm)

Code Compliance

- * ASME/ANSI A112.18.M
- * ANSI/NSF Standard 61
- * ADA Compliant

Finish Options

33 765 SDO Stainless Steel 33 765 KDO Stainless Steel/Black