



Company name:

Created by:

Phone:

Date:

23/04/2026

Qty.	Description
1	UPS 50-60 F  Note! Product picture may differ from actual product Product No.: 97523134 The pump is of the canned rotor type, i.e. pump and motor form an integral unit without shaft seal and with only two gaskets for sealing. The bearings are lubricated by the pumped liquid. The pump has 3-step speed selector. The pump is characterized by: * Stainless steel shaft. * Ceramic radial bearing system. * Carbon axial bearing. * Stainless steel rotor can and bearing plate. * Corrosion-resistant impeller, Composite. * Cast iron pump housing. The motor is a 1-phase motor. No additional motor protection is required. Controls: Terminal box position: 9H Liquid: Pumped liquid: Water Liquid temperature range: 35.6 .. 230 °F Selected liquid temperature: 140 °F Density: 61.35 lb/ft³ Technical: Rated flow: 62 US GPM Rated head: 12.74 ft Approvals: ETL, CSA Materials: Pump housing: Cast iron EN 1561 EN-GJL-200 ASTM A48-30B Impeller: Composite PES+30% GF Installation: Maximum ambient temperature: 104 °F





Company name:

Created by:

Phone:

Date:

23/04/2026

Qty.	Description
1	Amb. max at 80 dgr C liquid: 176 °F Maximum operating pressure: 145.04 psi Type of connection: 4-BOLT FLANGE C.I. Flange Pipe connection: 4 - Bolt Flange Pressure rating for connection: PN 10 Port-to-port length: 8 9/16 in Terminal box position: 9H Electrical data: Power input in speed 1: 0.3487 HP Power input in speed 2: 350 W Max. power input: 395 W Mains frequency: 60 Hz Rated voltage: 1 x 115 V Current in speed 1: 2.7 A Current in speed 2: 3.4 A Current in speed 3: 3.6 A Capacitor size - run: 40 µF/180 V Number of poles: 2 Insulation class (IEC 85): H Ex-protection standard: CONTACT Others: Net weight: 14.4 lb Gross weight: 17.3 lb Country of origin: US Custom tariff no.: 8413.70.2005



Company name:


Created by:

Phone:


Date:

23/04/2026

Description	Value
General information:	
Product name:	UPS 50-60 F
Product No:	97523134
EAN number:	5700317647497
Technical:	
Speed no:	3
Rated flow:	62 US GPM
Max. flow:	124 US GPM
Rated head:	12.74 ft
Maximum head:	21.33 ft
Approvals:	ETL, CSA
Materials:	
Pump housing:	Cast iron EN 1561 EN-GJL-200 ASTM A48-30B
Impeller:	Composite PES+30% GF
Installation:	
Maximum ambient temperature:	104 °F
Amb. max at 80 dgr C liquid:	176 °F
Maximum operating pressure:	145.04 psi
Type of connection:	4-BOLT FLANGE C.I. Flange
Pipe connection:	4 - Bolt Flange
Pressure rating for connection:	PN 10
Port-to-port length:	8 9/16 in
Terminal box position:	9H
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	35.6 .. 230 °F
Selected liquid temperature:	140 °F
Density:	61.35 lb/ft³
Electrical data:	
Power input in speed 1:	0.3487 HP
Power input in speed 2:	350 W
Max. power input:	395 W
Mains frequency:	60 Hz
Rated voltage:	1 x 115 V
Current in speed 1:	2.7 A
Current in speed 2:	3.4 A
Current in speed 3:	3.6 A
Capacitor size - run:	40 µF/180 V
Number of poles:	2
Insulation class (IEC 85):	H
Ex-protection standard:	CONTACT
Thermal protec:	internal
Controls:	
Terminal box position:	9H
Others:	
Net weight:	14.4 lb
Gross weight:	17.3 lb
Country of origin:	US
Custom tariff no.:	8413.70.2005

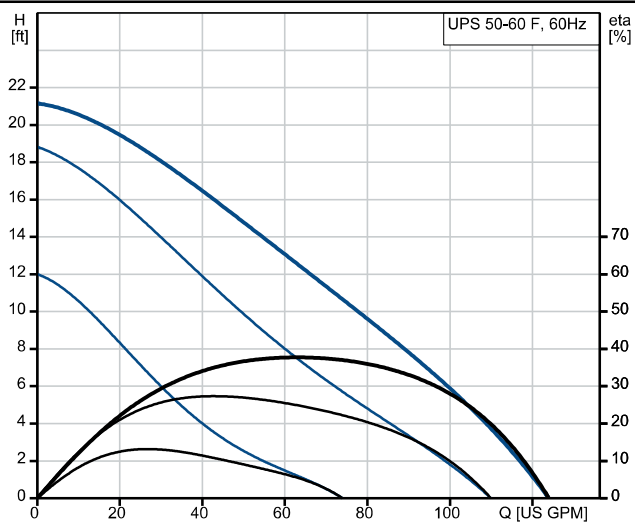

Pumped liquid = Water
Liquid temperature during operation = 140 °F
Density = 61.35 lb/ft³

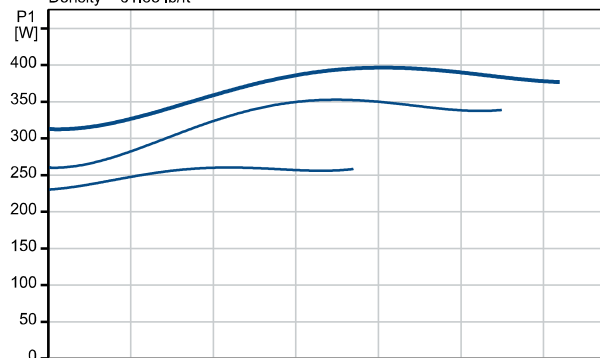

97523134 UPS 50-60 F 60 Hz

