



**Accuride**

Maximum weight capacity: 34 kg (75 lbs.)  
 Door thickness: 19 - 32 mm (3/4" - 1 1/4") (for doors 20 mm (13/16") or thicker, please order the optional 40 mm hinge kit)  
 Door heights: up to 1981 mm (78") (for doors 914 - 1981 mm (36" - 78") tall, see below for additional hinges required)  
 Door width up to 660 mm (26")  
 Pocket width: 51 - 64 mm (2" - 2 1/2") depending on door thickness  
 Even lengths: 305 - 813 mm (12" - 32")

- Vertically mounted concealed doors
- Entertainment centers, audio-visual conference centers
- Anti-Rak Cable System

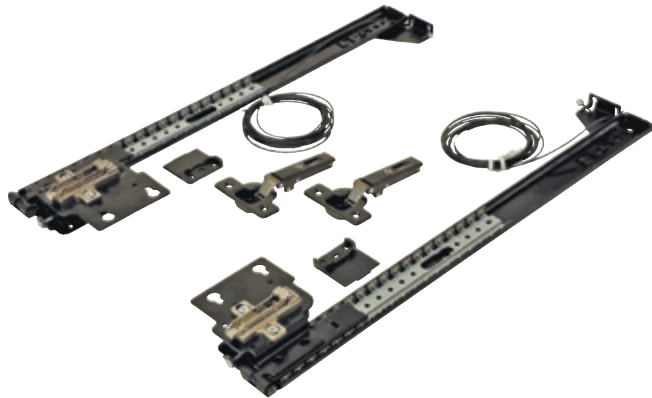


**1432 Overlay Application**

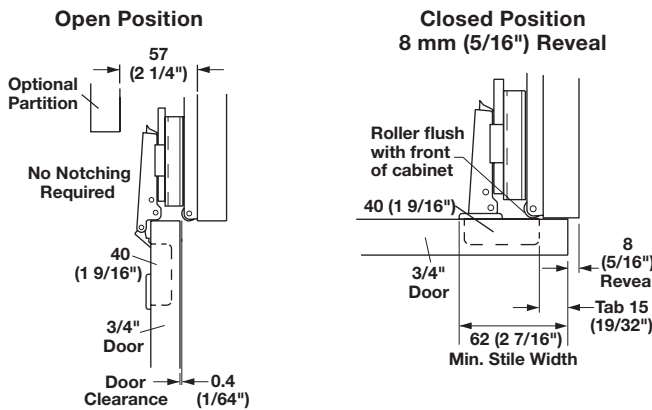

**Note**  
 Maximum 3/4" door thickness. Requires 0 mm mounting plate - 329.71.500 (order separately).

**Flush Inset Application**

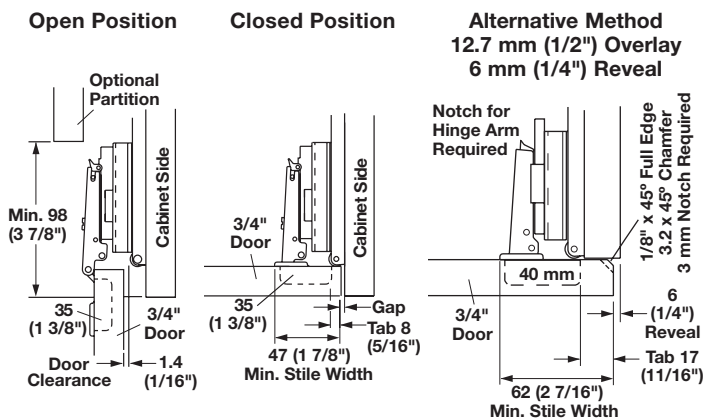

**1332/1432**

Material: Steel; Color: black


Slide length	Slide Travel	1332 - with 35 mm hinges	1432 - hinges not included
12" (305)	8 1/4" (210)	408.24.430	408.24.530
14" (356)	10 1/4" (261)	408.24.435	408.24.535
16" (405)	12 1/2" (312)	408.24.441	408.24.541
18" (456)	13 1/2" (343)	408.24.446	408.24.546
20" (506)	15 1/2" (394)	408.24.451	408.24.551
22" (557)	17 1/2" (445)	408.24.456	408.24.556
24" (608)	19 1/2" (496)	408.24.461	408.24.561
26" (659)	21 1/2" (546)	408.24.466	408.24.566
28" (710)	23 1/2" (597)	408.24.471	408.24.571
30" (762)	25 1/2" (648)	408.24.476	408.24.576
32" (813)	27 1/2" (699)	408.24.481	408.24.581

**1332 Supplied With**

Hinge kit  
 Slide mounting hardware kit  
 Mounting instructions

**1432 Supplied With**

Slide mounting hardware kit  
 Mounting instructions

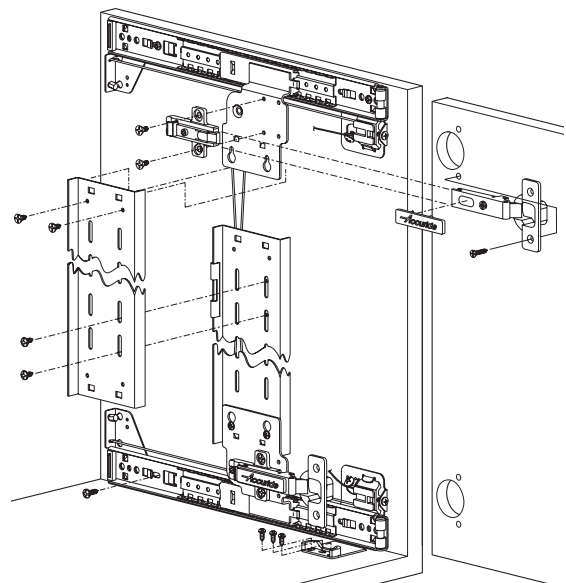

Dimensional data not binding. We reserve the right to alter specifications without notice.

Dimensions in mm  
 Inches are approximate