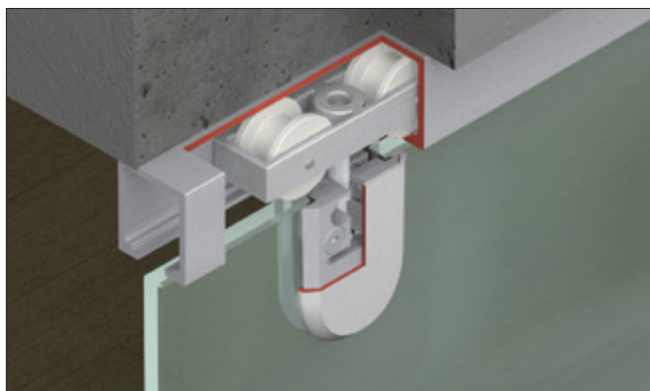
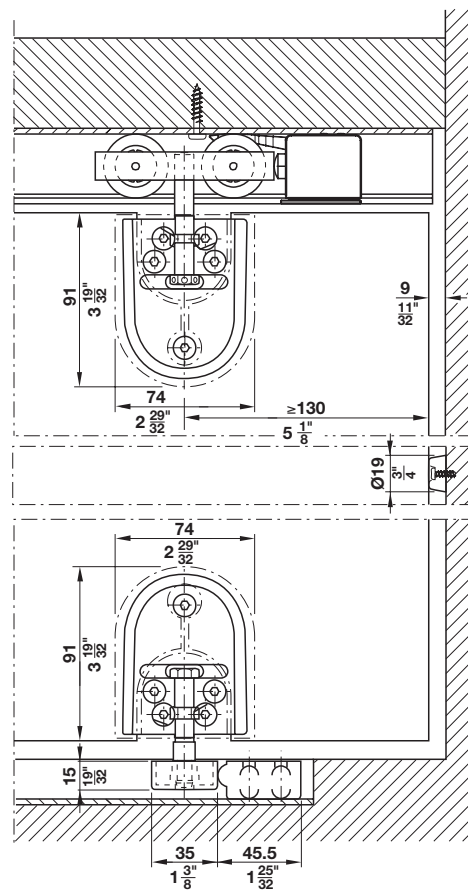


- Maximum door weight: 80 kg (176 lbs.)
- Glass thickness:
 - Tempered glass: 8, 10, 12, 12.7 mm (5/16" – 1/2")
 - Laminated glass: 8.7 – 12.7 mm (5/16" – 1/2")
 - *Maximum offset: 2 mm (7/32")
- For 1 and 2 sliding glass doors
- For laminated or tempered glass
- Smooth, quiet operation
- Maintenance-free
- Vertical adjustment without removing the glass door
- Low installation height
- Rattle-free bottom guide
- Simple installation



Technical drawing of a tank with dimensions in inches and millimeters. The drawing shows a side view of a tank with a hemispherical bottom and a vertical outlet pipe. Dimensions are given in inches (") and millimeters (mm). The top width is 52" (+1/0). The height from the top to the center of the hemispherical bottom is 25" (±0.5). The radius of the hemispherical bottom is R 26" (+0.25/0). The thickness of the tank wall is 1" (1/32"). The diameter of the hemispherical bottom is 52" (51 5/8"). The height from the center of the hemispherical bottom to the center of the outlet pipe is 71.5" (2 13/16"). The diameter of the outlet pipe is 4" (5 1/8"). The distance from the center of the hemispherical bottom to the center of the outlet pipe is 11" (9 + 0.25/0). The distance from the center of the hemispherical bottom to the center of the outlet pipe is 130" (5 1/8"). The drawing also shows a cross-section of the tank wall and a detail of the outlet pipe connection.

AH 1.250



Dimensional data not binding. We reserve the right to alter specifications without notice.

HAWA Junior 80/GP

Set





- For 1 sliding door without upper track and lower guide channel

	Item No.
	940.81.006

Supplied With

Mounting instructions


Set Components

	Description	Material	Finish	Qty.	Item No.
	Double roller running gear	–	–	2 pcs.	940.80.012
	Suspension bolt, M10 including mounting screws	–	–	2 pcs.	940.81.023
	Patch suspension	–	–	2 pcs.	940.40.038
	Track stopper with adjustable retention spring	–	–	1 pc.	940.80.040
	One-way drilling jig	–	–	1 pc.	940.40.089
	Wall buffer	Rubber	black	1 pc.	940.40.051
	Height adjusting pin	–	–	1 pc.	940.40.090

Note

Item numbers are valid for only 1 piece, when ordering individual components please state the desired amount. For 2 bi-parting sliding glass doors, please order 2 sets.

Individual Components

	Description	Material	Finish	Length	Item No.
	Upper track, pre-drilled	Aluminum	clear anodized	1.4 m (4' 7 1/8")	940.80.140
				1.6 m (5' 3")	940.80.160
				1.8 m (5' 10 7/8")	940.80.180
				2 m (6' 6 3/4")	940.80.200
				2.2 m (7' 2 5/8")	940.80.220
				2.5 m (8' 2 7/16")	940.80.250
				3 m (9' 10 1/8")	940.80.300
				4 m (13' 1 1/2")	940.80.400
				6 m (19' 8 1/4")	940.80.600




Angle profile	page 1.288
Toplock	pages 1.352-1.356
Floor mounted door stop	page 1.290
Glass edge protection profiles	page 1.291
Soft close	page 1.287
Fixed glass panel for 80/GP	pages 1.260-1.261

Dimensional data not binding. We reserve the right to alter specifications without notice.

Dimensions in mm
Inches are approximate

HAWA Junior 80/GP

Individual Components

Description	Material	Finish	Length	Item No.
Installation option 1				
 Patch suspension	–	–	–	940.40.038
 Lower guide, spring loaded, for single guide track	–	–	–	940.40.039
	Aluminum	anodized	2.5 m (8' 2 7/16")	940.41.725
			3.5 m (11' 5 13/16")	940.41.735
 Fixing set, for single lower guide track. 5 pcs each, 2 pcs. per meter required	Plastic	black	–	404.97.990
Installation option 2				
 Patch suspension	–	–	–	940.40.038
 Lower guide with mounting screws, suitable for patch suspension unit	–	–	–	940.40.035
 Lower guide channel, 24 x 24 mm (15/16" x 15/16"), not drilled	Aluminum	anodized	6 m (19' 8 1/4")	940.81.600
 End stop for guide channel 24 x 24 mm (15/16" x 15/16")	Aluminum	anodized	–	940.80.051
Installation option 3				
 Lower guide, rattle-free for glass thickness 8, 10 and 12.7 mm (3/16", 13/32", 1/2")	Steel	chrome plated matt	–	940.40.032
Installation option 4				
	Aluminum	anodized	2.5 m (8' 2 7/16")	941.00.925
			6 m (19' 8 1/4")	941.00.960
 Gliders, self adhesive, for 8 mm (5/16") thick glass	Plastic	–	–	940.40.033
 Gliders, self adhesive, for 10 mm (13/32") thick glass	Plastic	–	–	940.40.034

Fixed glass panel for 80/GP	pages 1.260-1.261
Flush pulls	pages 1.363, 1.371-1.373
Pull handles	pages 2.10-2.32
Sliding door locks	pages 1.357, 1.364-1.367

Dimensions in mm
Inches are approximate

HAWA Junior 80/GP

Cover Caps

	Description	Material	Finish	Qty.	Item No.
	Cover cap set, square, 4 pcs. for covering the patch suspension	Plastic	chrome-plated matt	4 pcs.	940.41.028
			stainless steel colored	4 pcs.	940.41.027
			unfinished	1 pc.	940.41.024
	Cover cap set, round, 4 pcs. for covering the patch suspension	Plastic	chrome-plated matt	4 pcs.	940.40.027
			brass-plated polished	4 pcs.	940.40.028
			stainless steel colored	4 pcs.	940.40.023
			chrome-plated polished	4 pcs.	940.41.029
			unfinished	1 pc.	940.41.023

1