

## HAFELE


#### **HAWA Junior 40/Z**

- Maximum door weight: 40 kg (88 lbs.)
- Minimum door thickness: 22 mm (7/8")
  For 1 and 2 sliding wood doors
- Smooth quiet operationOutstanding durability
- Rattle-free bottom guide
- Simple installation
- Special two-way suspensionVertically and laterally adjustable
- Door stop with adjustable retention spring




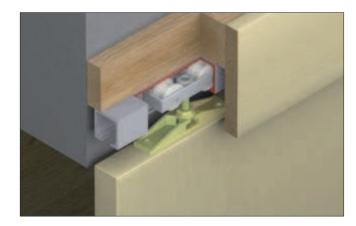

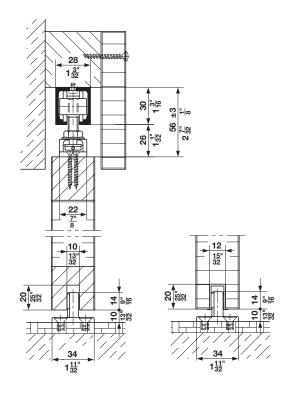




The two-way suspension bracket allows the door to be hung and to be taken off in two different ways:



#### 1. From the side

Fixed pocket cover doesn't have to be removed. Cover plate above opening has to be removable.



2. From the front

Dimensions in mm Inches are approximate

### **Top Hung System**



#### HAWA Junior 40/Z Set

• For 1 sliding door without upper track

Item No.
940.41.006

**Set Components** 

	Description	Material	Finish	Qty.	Item No.
	Double roller running gear	Aluminum	-	2 pcs.	940.41.100
	Two-way suspension plate, M8 bolt and mounting screws	-	-	2 pcs.	940.40.022
	Floor mounted guide, rattle-free	Plastic	black	1 pc.	940.40.031
	Track stopper with adjustable retention spring	Steel	-	1 pc.	940.40.041
6	Wall buffer	Rubber	black	1 pc.	940.40.051
	Height adjusting pin	Steel	galvanized	1 pc.	940.40.091

#### Note

Item numbers are valid only for one piece, when ordering individual components, please state the desired amount. Depending on application an additional track stopper has to be ordered with set. For 2 bi-parting sliding doors, please order 2 sets

#### **Individual Components**

	Description	Material	Finish	Length	Item No.
· ·	Upper track, pre-drilled	Aluminum	clear anodized	1.4 m (4' 7 1/8")	940.40.140
				1.6 m (5' 3")	940.40.160
				1.8 m (5' 10 7/8")	940.40.180
				2 m (6' 6 3/4")	940.40.200
				3 m (9' 10 1/8")	940.40.300
				4 m (13' 1 1/2")	940.40.400
				6 m (19' 8 1/4")	940.40.600
	Guide rail, glue-in type	Plastic	black	1.3 m (4' 3 1/8")	940.41.130

#### **Installation Plan**

(Included in fitting set), mounting instructions for planning and execution available upon request.

# Complete Sets Door panel width

Supplied With
up to 100 cm (39 3/8")
up to 90 cm (35 7/16")
up to 80 cm (31 1/2")
up to 70 cm (27 9/16")

Confort guides	page 1.198	
Angle profile	page 1.196	
Other lower guide options	page 1.199	
Futura framing kit	pages 1.189-1.191	
SoundEx bracket	page 1.197	

Upper track
Running gear
Two-way suspension plates
Track stopper
Guide
Rubber bumper
Height adjusting pin

Dimensions in mm Inches are approximate

Item No.

Track length