

Top Hung System

HAWA-Ordena 70/P


- Top running sliding system that is impervious to dust and dirt
- Allows wood and glass sliding door combinations
- Rattle-free lower guides
- Frameless and easy to install
- Glass door use HAWA-Junior GP suspension
- Maximum door weight: 70 kg (154 lbs.)
- Maximum door height: 2600 mm (8' 6 3/8")
- Minimum door width: **600 mm** (1' 11 5/8")
- Door thickness:

Wood: **30 - 40 mm** (1 3/16" - 1 19/32")


Tempered glass: **8 – 10 mm** (5/16" – 3/8")


Laminated glass: ***8.7 – 10.7 mm** (5/16" – 7/16")


*Maximum offset: 2 mm (7/32")







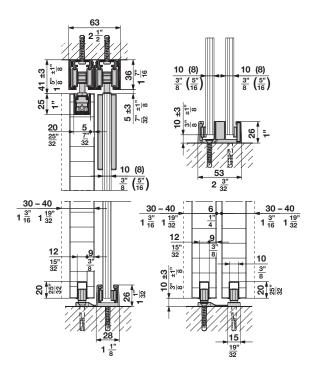



Glass Cutouts to Sliding Door

Dimensions in mm are exact Inches are approximate



Top Hung System

HAWA-Ordena 70/P

Complete Fitting Sets

	Description	Color	404.95.001	404.95.010
			For 1 wood sliding door	For 1 glass sliding door
C. S. C.	Running gear, four plastic coated ball bearing wheels		2 pcs.	2 pcs.
	Carrier profile with M7 suspension bolt		2 pcs.	
	Cover caps, 20 x 25 mm	gray	2 pcs.	
	Patch suspension			2 pcs.
AA	Suspension bolt, M7, including mounting screws			1 pc.
1000	Hex key, 4 mm long version		1 pc.	_

Dual Upper Tracks, pre-drilled, 36 x 63 mm (1 7/16" – 2 1/2")

Description	Material	Item No.
2.5 m (8' 2 7/16")	aluminum, anodized	404.96.925
3.5 m (11' 5 13/16")	aluminum, anodized	404.96.935

Packing: 1 pc.


Lower Guides, rattle-free

Description	Item No.
Dual lower guide for glass - glass sliding door application	404.95.911
Dual lower guide for glass - wood sliding door application	404.95.912
Dual lower guide for wood - wood sliding door application	404.95.913
Single lower guide for glass sliding door application (8-10 mm)	940.40.032
Single lower guide for wood sliding door application	940.40.037

Packing: 1 pc. **Guide Rail,** glue-in type

Description	Material/Color	Item No.
Guide rail, 20 x 12 x 1300 mm, recessed into bottom edge of wood door	plastic, black	940.41.130

Packing: 1 pc.

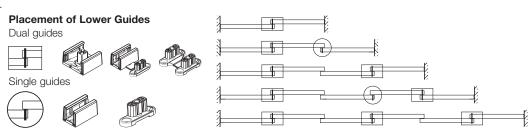

Dimensions in mm are exact Inches are approximate



Top Hung System

HAWA-Ordena 70/P

Cover Caps, plastic, powder-coated

	Description	Finish	Packing	Item No.
	Cover caps for patch suspension, round	chrome, matt brass polished stainless steel effect chrome polished	1 set (4 pcs.) 1 set (4 pcs.) 1 set (4 pcs.) 1 set (4 pcs.)	940.40.027 940.40.028 940.40.023 940.41.029
	Cover caps for patch suspension, square	chrome, matt	1 set (4 pcs.)	940.41.028
		stainless steel effect	1 set (4 pcs.)	940.41.027
	Cover caps Round for patch	unfinished	1 pc.	940.41.023
	suspension Square	unfinished	1 pc.	940.41.024

Door Stop Sets

Material: plastic

For opening with	Item No.
2–3 doors	404.95.308
4–5 doors	404.95.309
6–7 doors	404.95.310


Packing: 1 set

Accessories

Description	Material/Color	Packing	Item No.
Profile, self-adhesive, for 8-10 mm thick glass, 5 m long	rubber, black	1 roll	404.95.320
Centering element, for glass sliding door	plastic, gray	1 pc.	941.24.042

Wall Centering Element

The ideal wall connection for all glass sliding doors with unprotected glass edges.



Rubber Profile for Glass Edge Protection

Self-adhesive rubber profile is recommended for glass doors that can strike against one another.



Order Specifications

- Type and quantity of fitting sets
- Type and quantity of door stop sets
- Type and quantity of lower guides
- Length of upper track
- Length of lower guide channel
- For glass doors
 - Type and quantity of cover plates
- Length of rubber profile for glass protection
- Quantity of centering elements for wall connection