
HÄFELE

LED 3094

Medium intensity
Wattage: 2.5 W
Diodes: 4


24 V

Recess or surface mounted, drill hole Ø: 58 mm (2 5/16")

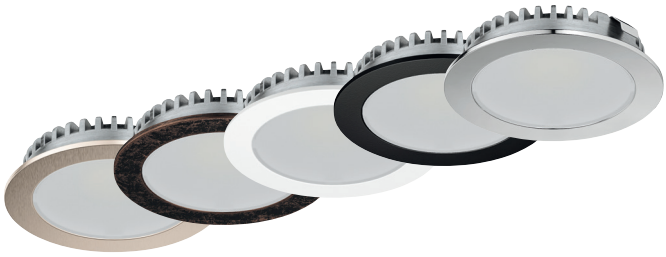



> Recess mounted in drilled hole or surface mounted with matching trim ring

> Color rendering index: R_a: >90
> Color rendering index: R_9: >50
> Degree of protection: IP20
> Lifetime: 30,000 h
> Material: Housing: Aluminum; Diffuser: Plastic
> Supplied with: 1 light with 2 m (78 3/4") lead

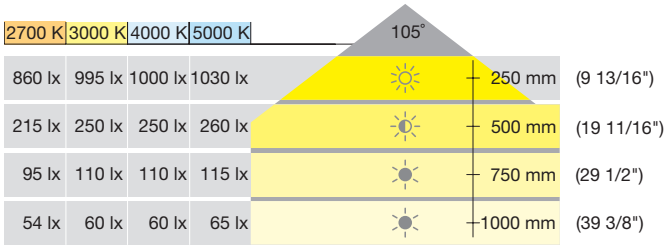

Recess mounting





Color Temperature K	Luminous flux lm	Luminous efficacy lm/W	chrome colored	black	white	bronze colored	nickel colored
2700	140	56	833.75.320	833.75.324	833.75.328	833.75.332	833.75.546
3000	160	64	833.75.321	833.75.325	833.75.329	833.75.333	833.75.547
4000	165	66	833.75.322	833.75.326	833.75.330	833.75.334	833.75.548
5000	175	70	833.75.323	833.75.327	833.75.331	833.75.335	833.75.549


Note
Order optional trim ring below for surface mounting applications.

Surface mounted trim ring, optional




> Material: Aluminum

Finish	Item No.
chrome colored	833.72.809
black	833.72.806
white	833.72.807
bronze colored	833.72.808
nickel colored	833.72.528

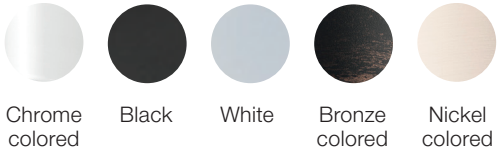

Surface mounting



Note
Suitable for use within closet storage spaces.

YOU MAY ALSO NEED:
DRIVERS pp. 284–291
SWITCHES pp. 228–251
DISTRIBUTORS pp. 254–259

IP20

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.