








Top Hung System



HAWA-Junior 80/GP

Fitting Set, for a single sliding glass door without upper track and lower guide channel

1 Set		Qty.	Item No.
consisting of:	Description		
	Double roller running gear	2 pcs.	940.80.012
	Suspension bolt, M10, including mounting screws	2 pcs.	940.81.023
	Patch suspension	2 pcs.	940.40.038
	Track stopper with adjustable retention spring	2 pcs.	940.80.041
	One-way drilling jig	1 pc.	940.40.089
	Rubber wall buffer	1 pc.	940.40.051
	Height adjusting pin	1 pc.	940.40.090

Note:

- Item numbers are valid for only 1 piece, when ordering individual components please state the desired amount
- For bi-parting sliding glass doors order 2 sets




Upper Tracks, pre-drilled
Material: aluminum, anodized, clear

Length	Item No.
1.4 m (4' 7 1/8")	940.80.140
1.6 m (5' 3")	940.80.160
1.8 m (5' 10 7/8")	940.80.180
2.0 m (6' 6 3/4")	940.80.200
2.2 m (7' 2 5/8")	940.80.220
2.5 m (8' 2 7/16")	940.80.250
3.0 m (9' 10 1/8")	940.80.300
4.0 m (13' 1 1/2")	940.80.400
6.0 m (19' 8 1/4")	940.80.600

Packing: 1 pc.


Accessories

- HAWA-Angle profile for wall mounting, (refer to pages 394-395)



- Sliding door lock HAWA-Toplock, (refer to pages 396-400)
- Lower guide channel, (refer to page 405)
- Floor mounted door stop, (refer to page 313)
- Glass edge protection seals, (refer to page 405)
- Cover caps and lower guides order separately, (refer to page 314)
- Smuso AD soft-close, (refer to page 410)

Required Glass Cutouts

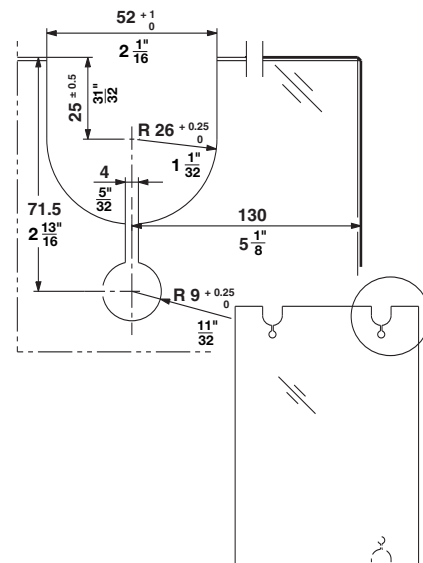

Glass Thickness

Tempered glass: **8, 10, 12, 12.7 mm** (5/16 - 1/2")
Laminated glass: ***8.7 - 12.7 mm** (5/16 - 1/2")
*Maximum offset: **2 mm** (7/32")

Installation Plan

(included in fitting set), mounting instructions for planning and execution available upon request.

Dimensional data not binding. We reserve the right to alter specifications without notice.

Dimensions in mm are exact
Inches are approximate