








Top Hung System

HAWA-Junior 160/GP

Fitting Set, for a single sliding glass door without upper track and lower guide channel

1 Set		941.60.005	
consisting of:	Description	Qty.	Item No.
	Double roller running gear	2 pcs.	941.60.012
	Suspension bolt, M14, including mounting screws	2 pcs.	941.60.023
	Patch suspension	2 pcs.	940.40.038
	Track stopper with adjustable retention spring	2 pcs.	941.60.041
	One-way drilling jig	1 pc.	940.40.089
	Rubber wall buffer	1 pc.	940.40.051
	Height adjusting pin	1 pc.	940.40.090

- Note:**
- Item numbers are valid for only 1 piece, when ordering individual components please state the desired amount
 - For 2 bi-parting sliding glass doors order 2 sets



Upper Tracks, pre-drilled
Material: aluminum, anodized clear

Length	Item No.
3.0 m (9' 10 1/8")	941.60.300
4.0 m (13' 1 1/2")	941.60.400
6.0 m (19' 8 1/4")	941.60.600

Packing: 1 pc.

Accessories

- Sliding door lock HAWA-Toplock (refer to pages 396-400)
- Cover caps and lower guides (refer to page 313-314)


Glass Thickness

Tempered glass: **8,10, 12, 12.7 mm** (5/16 - 1/2")

Laminated glass: ***8.7 - 12.7 mm** (5/16 - 1/2")

*Maximum offset: **2 mm** (7/32")

Required Glass Cutouts

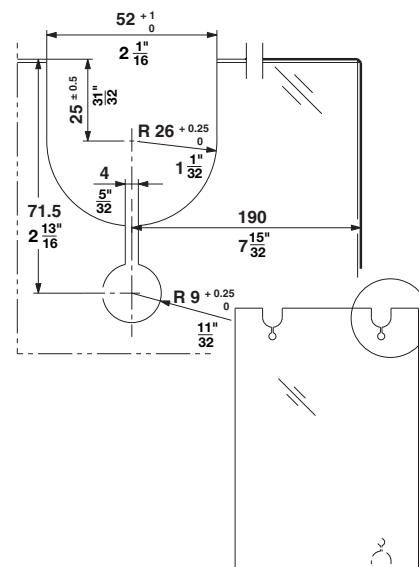

Dimensional data not binding. We reserve the right to alter specifications without notice.

Dimensions in mm are exact
Inches are approximate