



3600 Series - Lever Options


ARCHER LEVER

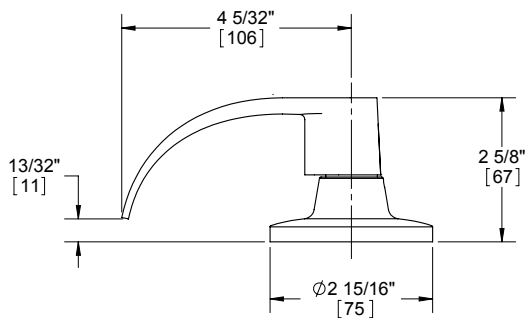

AUGUST LEVER

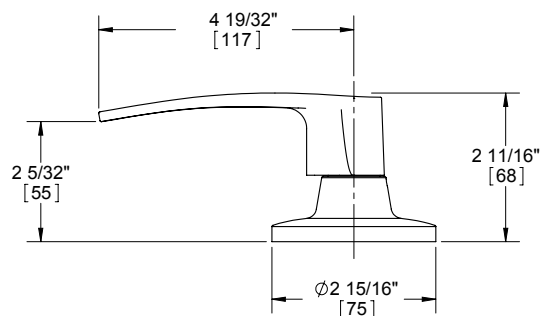

WITHNELL LEVER

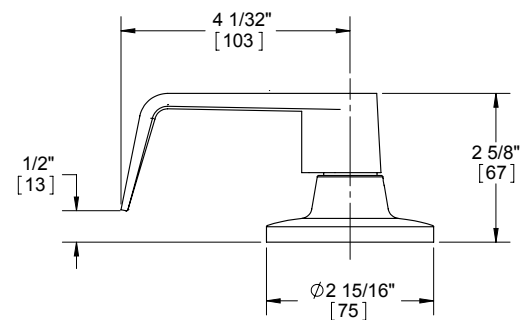

3600 Series - Grade 2 Tubular

WARRANTY

Five-year warranty

FEATURES

- Heavy duty residential - medium duty commercial
- No exposed mounting screws
- Non-handed
- Conventional cylinder or Small Format Interchangeable Core option available

Certifications:


- BHMA Certified ANSI A156.2 Series 4000 Grade 2
- ADA Compliant ANSI A117.1 Accessibility Code
- UL/cUL Listed for all functions up to 3 hours for "A" label single doors
- UL10C Positive Pressure Rated

Lever Options:

Archer, August, Withnell levers

Options:

- Split finish (Contact Customer Service for availability)

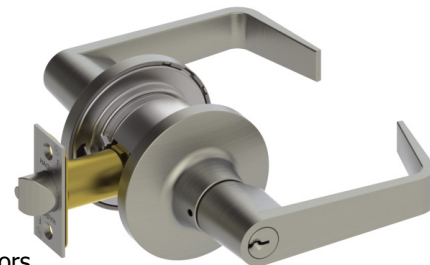

SPECIFICATIONS

Standard Door Prep:

- 2-1/8" (54 mm) diameter (bore)
- Latch hole: 1" (25 mm) diameter (cross bore)

Exposed Trim:

- Levers: Cast zinc
- Rose: Wrought brass

Rose Diameter:

2-15/16" (75 mm)

Lock Chassis:

Heavy gauge steel, zinc dichromated

Keys:

Two operating keys supplied per lock

Cylinders/Cores:

- Brass - keyed different - Schlage C Keyway - Standard
- Cylinder drilled 6-pin, keyed 5-pin - Standard
- Other keying options, including keyed 6-pin, available from factory (see cylinder, core and keying section)
- Zero bit cylinders will be 6 pin keyed - standard
- Small Format Interchangeable Core option available
- SFIC uncombined or combined, brass 6- or 7-pin cores sold separately
- Levers prepped for SFIC cores are only available in US26D finish

Door Thickness:

1-3/8" - 1-3/4" (35 mm - 45 mm)

Backset:

- Adjustable 2-3/8" - 2-3/4" (60 mm - 70 mm)
- Preset at factory for 2-3/8" (60 mm)

Latchbolt:

- 1/2" (13 mm) throw, stainless steel
- 1" x 2-1/4" (25 mm x 57 mm) faceplate
- Square corner faceplate standard, round corner available
- Deadlocking latchbolt prevents manipulation when door is closed; keyed functions only

Strike:

3935 ASA 1-1/4" x 4-7/8" (32 mm x 124 mm) strike - Standard

Functions:

10 Passage, 17 Dummy, 40 Privacy, 53 Entry, 70 Classroom, 80 Storeroom

FINISHES

US4, US10B, US26D