

Elevate your style and comfort with a Haiku ceiling fan. Built from premium materials and featuring cutting-edge SenseME technology, Haiku has won more than 75 international design and tech awards.

### THE CEILING FAN, REINVENTED


- **Airfoils** — Bamboo or aircraft-grade aluminum; 52 in., 60 in., or 84 in. (1.3 m, 1.5 m, or 2.1 m) fan sweep
- **Motor** — High-efficiency, brushless DC motor with digital inverter drive
- **Controls** — [Remote control](#), Haiku mobile app<sup>1</sup>, voice control<sup>2</sup>, or [0–10 V module](#) (optional)
- **Onboard Sensors** — Ambient and surface temperature, relative humidity, and passive infrared sensors enable [SenseME technology](#)
- **Mounting** — Flat or sloped ceilings (< 33°) 8 ft (2.4 m) and taller
- **Environment** — Indoor use only
- **Operating Voltage** — 100–240 VAC, 1 Φ, 50–60 Hz
- **Sound Level** — <35 dba at max speed<sup>3</sup>
- **Accessories** — [Haiku Light Kit](#). Optional extension tube lengths and a Stabilizer Kit are available for ceilings over 14 ft (4.3 m).
- **Warranty** — Visit the [Haiku website](#) for details.



#### Hardware Finishes



#### Airfoil Finishes

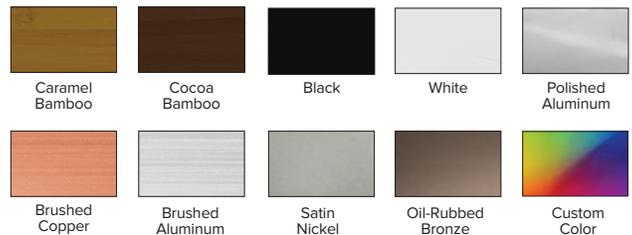

### ORDERING INFORMATION

DIAMETER	MOUNT	AIRFOIL, MOTOR FINISH	COUNTRY	MOTOR	GEN	AIRFOIL FINISH (ALUMINUM ONLY)
					01	
52 in: S3127 60 in: S3150 84 in: B3213	52 in. Low Profile: S0 Standard: A2 Universal: X2	Aluminum, Black: AB Aluminum, ORB: AO Aluminum, SN: AS Aluminum, White: AW Bamboo Caramel, Black: BC Bamboo Caramel, ORB: BCO Bamboo Caramel, SN: BCS Bamboo Caramel, White: BCW Bamboo Cocoa, Black: BW Bamboo Cocoa, ORB: BWO Bamboo Cocoa, SN: BWS Bamboo Cocoa, White: BWW	North America: 0402 Europe: 0502 Japan: 0602 Saudia Arabia, UAE: 0802	52 in: C 60 in: C 84 in: D	01	Black: F258 White: F259 Polished Aluminum: F421 Brushed Copper: F523 Brushed Aluminum: F531 Satin Nickel: F470 Oil-Rubbed Bronze: F471
	60 in. Low Profile: S0 Standard: A2 Universal: X2					
	84 in. Universal: X4					

<sup>1</sup> SenseME Technology and the Haiku mobile app are supported by Android™ and iOS®.

<sup>2</sup> Voice control requires an Amazon Alexa-enabled device.

<sup>3</sup> Actual results of sound measurements in the field may vary due to sound reflective surfaces and environmental conditions.

Lead times may vary.  
Specifications subject to change without notice.  
Warranty period and terms vary by country and application.



USA  
HAIKUHOME.COM  
855-694-2458

CANADA  
HAIKUHOME.COM/CA  
844-924-4277

AUSTRALIA  
HAIKUHOME.COM/AU  
1-300-244-277

SINGAPORE  
HAIKUHOME.COM/SG  
+65 6709 8500

## ALUMINUM SPECIFICATIONS

DIAMETER	MOUNT	WEIGHT <sup>4</sup>	MAX SPEED	AIRFLOW MIN/MAX	WATTS MIN/MAX
52 in. (127 cm)	Low Profile	16.5 lb (7.5 kg)	177 RPM	1,301 / 5,629 cfm	2.2 / 15.6 W
	Standard	16.5 lb (7.5 kg)	200 RPM	1,389 / 6,713 cfm	2.1 / 20.7 W
	Universal	15.5 lb (7 kg)	200 RPM	1,389 / 6,713 cfm	2.1 / 20.7 W
60 in. (150 cm)	Low Profile	18.5 lb (8.4 kg)	177 RPM	1,070 / 6,698 cfm	1.9 / 18.4 W
	Standard	18.5 lb (8.4 kg)	200 RPM	1,194 / 8,629 cfm	1.9 / 26.8 W
	Universal	17.5 lb (8 kg)	200 RPM	1,194 / 8,629 cfm	1.9 / 26.8 W
84 in. (213 cm)	Universal	26 lb (11.8 kg)	135 RPM	5,983 / 19,292 cfm	4.2 / 53.7 W




## BAMBOO SPECIFICATIONS

DIAMETER	MOUNT	WEIGHT <sup>4</sup>	MAX SPEED	AIRFLOW MIN/MAX	WATTS MIN/MAX
52 in. (127 cm)	Low Profile	14 lb (6.4 kg)	177 RPM	1,483 / 5,866 cfm	2.2 / 19.2 W
	Standard	14 lb (6.4 kg)	200 RPM	1,427 / 6,597 cfm	2.3 / 26.6 W
	Universal	13 lb (5.9 kg)	200 RPM	1,427 / 6,597 cfm	2.3 / 26.6 W
60 in. (150 cm)	Low Profile	16 lb (7.3 kg)	177 RPM	876 / 6,165 cfm	1.9 / 15.5 W
	Standard	16 lb (7.3 kg)	200 RPM	1,038 / 7,673 cfm	1.8 / 21.4 W
	Universal	15 lb (6.8 kg)	200 RPM	1,038 / 7,673 cfm	1.8 / 21.4 W
84 in. (213 cm)	Universal	21 lb (9.5 kg)	135 RPM	4,661 / 15,378 cfm	3.8 / 39.2 W




## DIMENSIONS AND MOUNTS <sup>5</sup>

### Low Profile Mount

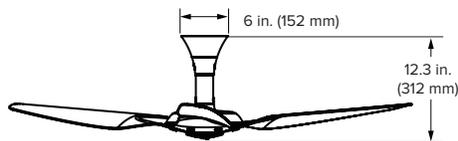


Flat ceilings as low as 8 ft (2.4 m)

### Standard Mount

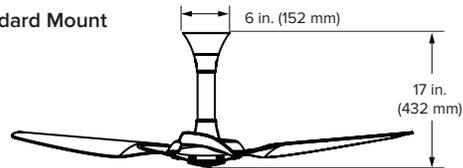

Flat ceilings from 8.5–11 ft (2.5–3.4 m)

### Universal Mount

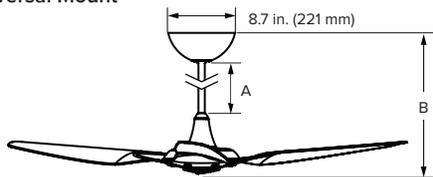

Sloped or flat ceilings from 9–18 ft (2.9–5.5 m)

	Universal Mount Extension Tube Lengths				
	Included		Optional*		
Extension Tube (A)	20 in. (508 mm)	32 in. (813 mm)	7 in. (178 mm)	48 in. (1219 mm)	60 in. (1524 mm)
Fan Height (B)**	29 in. (737 mm)	41 in. (1041 mm)	16 in. (406 mm)	57 in. (1448 mm)	69 in. (1753 mm)
Ceiling Height	9.5–11 ft (2.9–3.4 m)	11–13 ft (3.4–4 m)	9–11 ft (0.2–2.9 m)	13–14 ft (4–4.3 m)	>14 ft (>4.3 m)

\* Optional extension tube lengths packaged separately. The 7 in. (178 mm) tube is not available for 84-inch (2134 mm) fans.  
\*\* Add 0.8 in. (20 mm) for 84-inch (2134 mm) diameter fans.

<sup>4</sup> The precise fan weight will vary based on individual component weights and finishing.  
<sup>5</sup> Fan heights do not include the Haiku Light kit.

Lead times may vary.  
Specifications subject to change without notice.  
Warranty period and terms vary by country and application.