


# 730873251730 MOUNTING FRAME INSTRUCTIONS

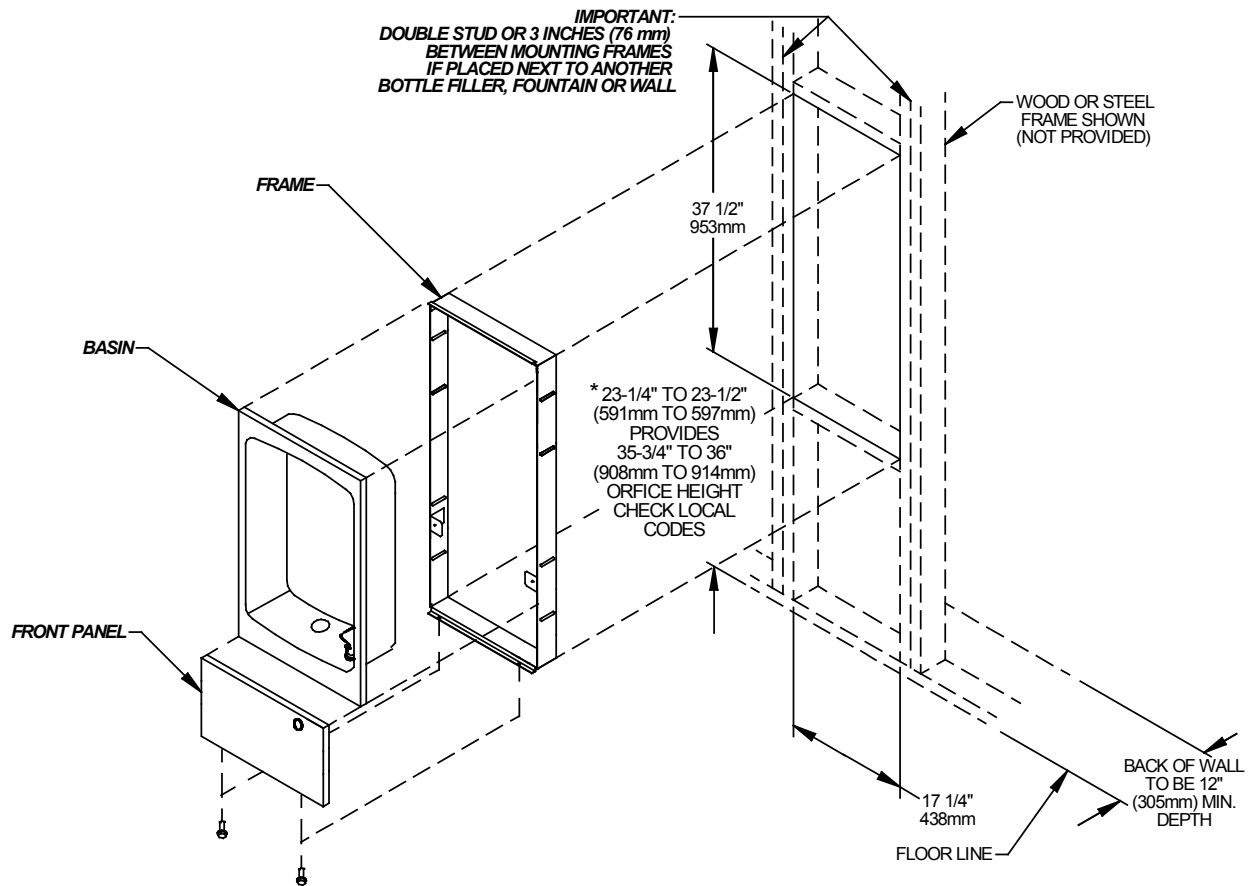

1. **Cut a square rectangular wall opening** 17-1/4" (438mm) W x 37-1/2" (953mm) H and (\*23-1/4" (591mm) for ADA) above finished floor.
2. **Reinforce the wall opening** on all sides so that it will adequately support the fountain. This reinforcement must support up to 150 lbs static load and provide a means for securing the frame assembly in place.

**NOTE:** Access to the rear of the fountain is desirable to ease installation. If rear access is not obtainable an access panel (furnished by others) should be installed below the fountain.

3. **Remove frame and related hardware** from packaging. Install the frame squarely in wall opening with frame upright edges flush with the finished wall face. Secure the frame sides and top to the wall using (10) 5/16" bolts or screws (not provided).

**NOTE:** Be sure that frame is squared in location. Do not use less than the required screw quantity and size.