HANOVER[®]

MODEL: HVLNA10



TOOLS NEEDED

4MM HEX KEY, ALLEN, T-HANDLE (INCLUDED), 7/16 WRENCH



ASSEMBLY INSTRUCTIONS

8

8


2 B-1/4-20 X 2-1/4 WAFER SHCS 6 C-.273 X 2.00 SOCKET WAFER A

D-1/4-20 NYLOCK NUT

E-1/4 FLAT WASHER


STEP 1 Attach Front Legs to Seat using (6) 1-7/8" bolts, nuts and washers.

Attach Front and Rear Brace using (4) 2" screws.



STEP 3 Attach Back to Seat and Arms using (4) 2" screws STEP 2

Attach Arms to Front Legs using (2) 2-1/4" bolts, nuts and washers.

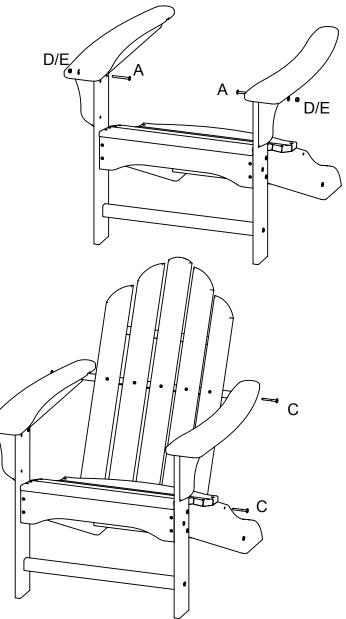

ALL HARDWARE IS STAINLESS STEEL