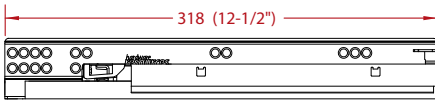
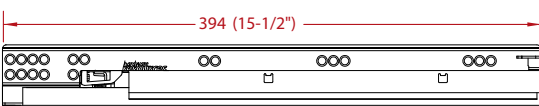
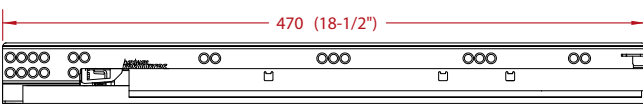
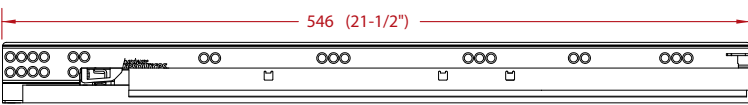


Standard-Duty Soft-Close Slide Kits

USE58 Slide Kit Series

**Undermount
Slides**

Construction & Assembly Specifications

| | | | | FRAMELESS | FACE FRAME | |
|---|-------------------|---------------------|-----------------------|--------------------------|--------------------------|--------------------------|
| | Slide Length | Total Cabinet Depth | Overall Drawer Length | Min Inside Cabinet Depth | Min Inside Cabinet Depth | Max Inside Cabinet Depth |
|  | 12-1/2" 318 mm | 15" 381 mm | 12" 305 mm | 12-5/8" 321 mm | 12-7/8" 326 mm | 14-9/16" 369 mm |
|  | 15-1/2" 394 mm | 18" 457 mm | 15" 381 mm | 15-11/16" 398 mm | 15-7/8" 403 mm | 17-9/16" 446 mm |
|  | 18-1/2" 470 mm | 21" 533 mm | 18" 457 mm | 18-11/16" 474 mm | 18-7/8" 479 mm | 20-9/16" 522 mm |
|  | 21-1/2" 546 mm | 24" 610 mm | 21" 533 mm | 21-11/16" 550 mm | 21-7/8" 555 mm | 23-9/16" 598 mm |

Assume 3 mm (1/8") setback from drawer opening

Rear brackets for face frame applications will yield a 5–48 mm (3/16"–1-7/8") depth adjustment

For inset drawer front applications:


Setback: 5 mm (3/16") + Drawer Front Thickness

For frameless cabinets, Inside Cabinet Depth Minimum = Slide Length + Setback + 3 mm (1/8")


For face frame cabinets, Inside Cabinet Depth Minimum = Slide Length + Setback + 5 mm (3/16")

Inside Cabinet Depth Maximum = Slide Length + Setback + 48 mm (1-5/16")

FRONT HOLE PATTERN

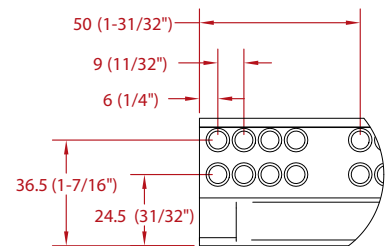


FRONT VIEW OF THE DRAWER INSIDE THE CABINET

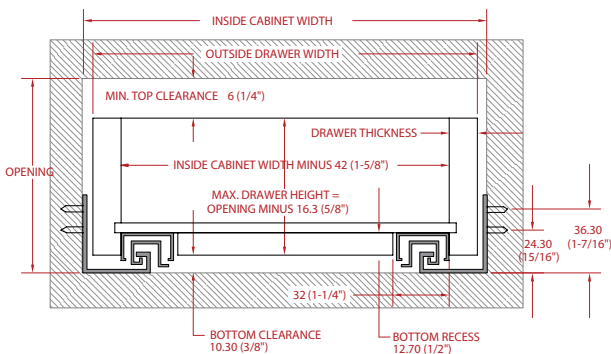

MAXIMUM DRAWER HEIGHT = OPENING MINUS 19 MM (3/4")

REAR NOTCH DIMENSIONS

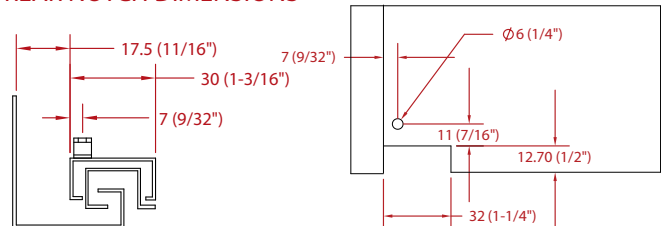

OUTSIDE DRAWER WIDTH CALCULATIONS

| | | | | | |
|--------------------------------|----------------------|-----------------|----------------|----------------------|-----------------|
| Drawer Side Thickness | 5/8" 16 mm | 19/32" 15 mm | 9/16" 14 mm | 1/2" 13 mm | 15/32" 12 mm |
| Inside Cabinet Width Deduction | 3/8" 10 mm | 15/32" 12 mm | 9/16" 14 mm | 5/8" 16 mm | 23/32" 18 mm |