



model 1920FR

Vandal-Resistant Outdoor Freeze-Resistant Bottle Filler

FEATURES & BENEFITS

CONSTRUCTION

Unit is made of 14 gauge Type 304 stainless steel with a satin finish that resists stains and corrosion, and has soft rounded corners. Unit features vandal-resistant bottom plate and dispensing nozzle.

EFFICIENT & FLEXIBLE INSTALLATION

Unit is designed for retrofit or new construction applications. No drain required for mounting over existing drinking fountain.

DURABLE BUILD

Good for outdoor applications where the unit may encounter freezing conditions. Made with 100% Stainless Steel for vandal resistance.

MOUNTING OPTIONS

Select from mounting plate and back panel models to complete installation. Unit can mount on various wall types.

VANDAL-RESISTANT

The push button and bottom plate are locked in place, discouraging unwanted vandal tampering.



OPTIONS

Back Panel: Model BP15, satin finish stainless steel 15 inch back panel for Model 1920.

Custom Logo Panel: Model 6475, Hydration By Haws™ logo panel with customization options.

Mounting Plate: Model 6700 universal mounting plate for most wall mounted fountains. Priced Separately.

For more information, visit www.hawsco.com or call (888) 640-4297.

SPECIFICATIONS



Model 1920FR vandal-resistant wall mounted freeze-resistant bottle filler can be a stand-alone wall mounted station, or mounted over the 1109FR & 1119FR series fountains. It shall include stainless steel construction, a polished chrome-plated brass push-button operated by a pneumatic valve installed on the inside wall where room temperatures do not drop below 50° F (10° C), and self-draining water lines which protect the unit from freezing.

REQUIRES MODEL 6521FR PRICED SEPARATELY


APPLICATIONS

This type of wall mounted bottle filler may be placed in settings such as schools, parks and other outdoor locations where the freezing temperatures may exist. Haws manufactures drinking fountains, faucets and electric water coolers to be lead-free by all known definitions including NSF/ANSI/CAN 61-Section 9, NSF/ANSI/CAN 372, California Proposition 65, and the Federal Safe Drinking Water Act. Product is compliant to California Health and Safety Code 116875 (AB 1953-2006), and NSF/ANSI/CAN 61: Q ≤ 1.



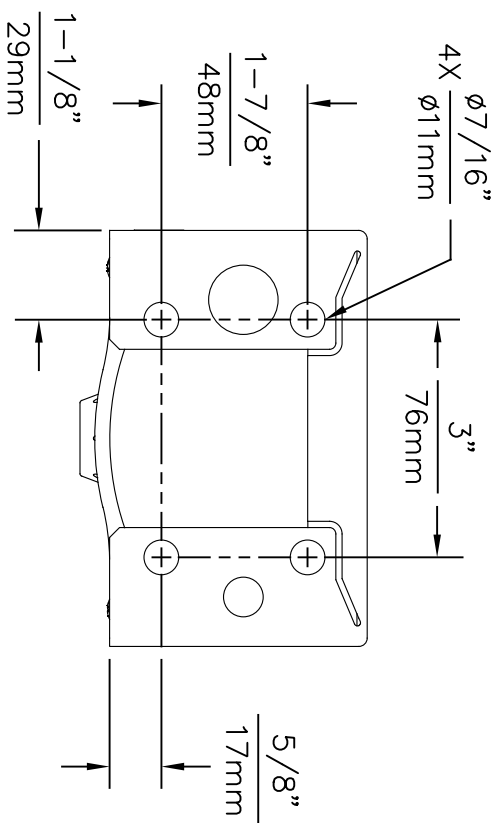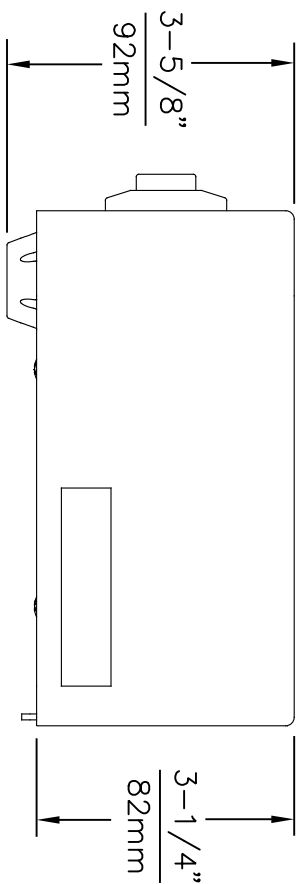


1920FR MOUNTING HOLE LOCATIONS

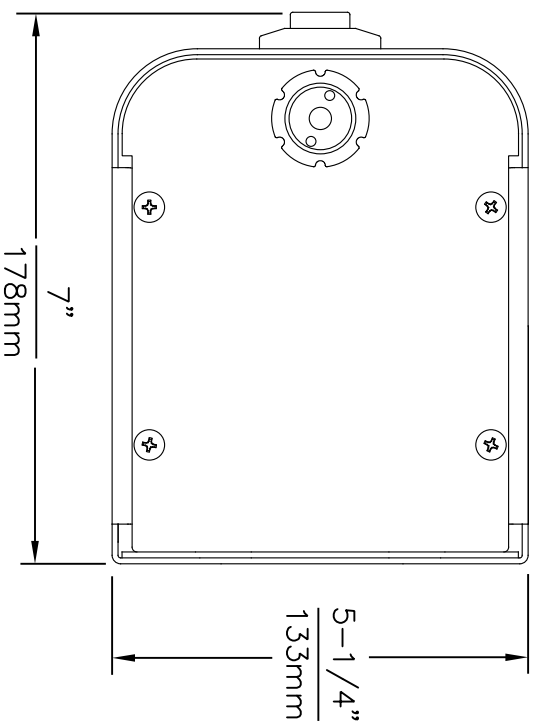

NOTES:

- 1 THIS BOTTLE FILLER REQUIRES THE USE OF MODEL 6521FR FREEZE RESISTANT VALVE ASSEMBLY (SOLD SEPARATELY OR AS PART OF PRODUCT BUNDLES).
- 2 VALVE ASSEMBLY MUST BE INSTALLED IN A WARM AREA. PROVISIONS SHOULD BE MADE TO ALLOW ACCESS TO THE ACCESS PANEL.
3. SEE SEPERATE INSTALLATION DRAWINGS FOR FOUNTAINS, MOUNTING PLATES, BACKPANELS, AND DRIP TRAY. HOLD ROUGH-IN DIMENSIONS ± 1/8" (3.2mm).
4. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO. FOR INSTALLATION HEIGHTS OTHER THAN SHOWN, DIMENSIONS MARKED (*) MUST BE ADJUSTED ACCORDINGLY.

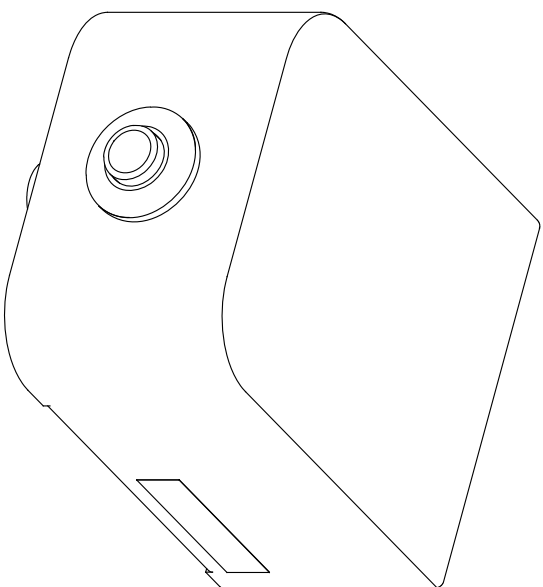


1455 KLEPPE LANE
 SPARKS, NEVADA 89431
 (775) 359-4712 FAX (775) 359-7424
 E-MAIL: HAWS@HAWSCO.COM
 WEBSITE: WWW.HAWSCO.COM

CON. NO.	REVISED PER:	BY:	MODEL(S)	PART NUMBER
5081	ECON-6798	EV	1920FR	0510000491.D
DRAWN:	DATE:	CHK'D:	SCALE:	REVISION
DS	06/25/16	SS	N/A	6
APPROVED:	DATE:	SCALE:	DRAWING TYPE:	INSTALLATION
EV	07/08/22			SIZE: A SHEET 1 OF 3

NOTES:
SEE SHEET 1

3/8" OD POLYPROPYLENE TUBING
(CONNECT TO NOZZLE WITH
SUPPLIED PUSH-IN ELBOW,
TRIM TO FIT.)



7/8" OD INSULATING TUBING (MUST COVER
ENTIRE SUPPLY TUBING, FROM THE
NOZZLE TO MODEL 6521FR ASSEMBLY)
TRIM TO FIT.


CONNECT AIR LINE TO BOTTLE
FILLER PUSH BUTTON, TRIM TO FIT.

6700 MOUNTING PLATE
(BEHIND FINISH WALL)
- OR -
6700R RETROFIT PLATE
(ON TOP OF FINISH WALL)
BOTH SOLD SEPARATELY

BP15
BACK PANEL
(NOT SUPPLIED)

6489
DRIP
TRAY
(NOT
SUPPLIED)

BP3
BACK PANEL
(NOT
SUPPLIED)

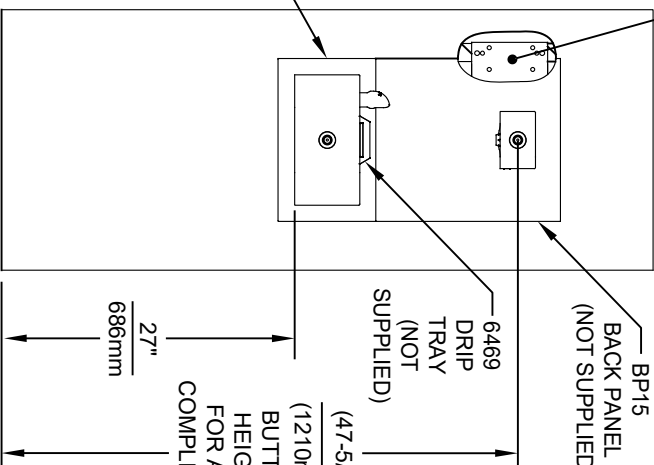


(47-5/8")
(1210mm)
BUTTON
HEIGHT
FOR ADA
COMPLIANCE

27"
686mm

1920FR
DRINKING
FOUNTAIN
SHOWN FOR
REF. ONLY
(NOT SUPPLIED)

6521FR FREEZE RESISTANT
VALVE ASSEMBLY
(NOT SUPPLIED)
FOR DRINKING FOUNTAIN

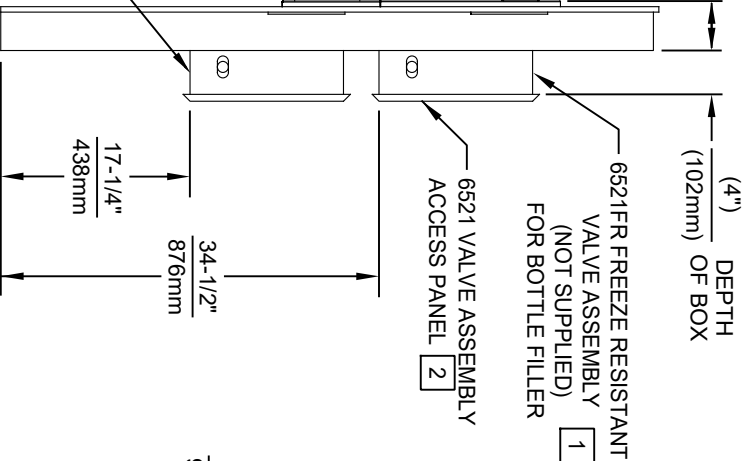

(7")
(178mm)

(4")
DEPTH
(102mm) OF BOX

6521FR FREEZE RESISTANT
VALVE ASSEMBLY (NOT SUPPLIED) [1]
FOR BOTTLE FILLER ACCESS PANEL [2]


34-1/2"
876mm

17-1/4"
438mm


37-1/2"
952mm

39-1/2"
1003mm

1/2" IPS SUPPLY
(NOT SUPPLIED)
1-1/4" IPS
WASTE (NOT
SUPPLIED)

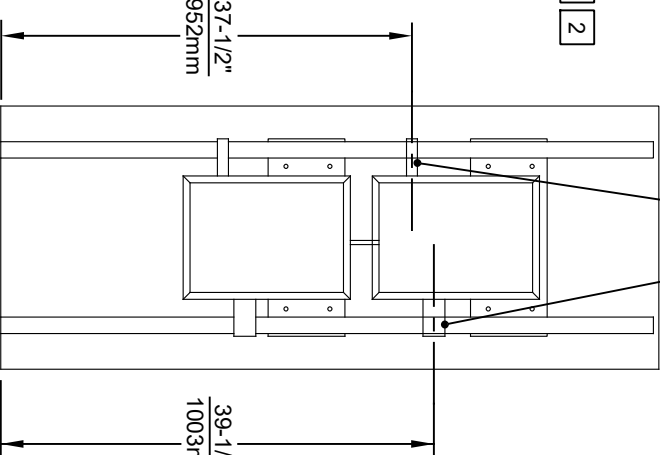


INSTALLATION SHOWN ABOVE HAWS MODEL 1109FR






1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 399-4712 FAX (775) 399-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

ECON NO.	5081	REVISED PER BY:	FV	MODEL(S)	1920FR
DRAWN:	MI	DATE:	02/19/17	CHKD.:	JIS
APPROVED:	FV	DATE:	07/08/22	SCALE:	N/A
				DRAWING TYPE:	INSTALLATION
				SIZE:	A
				SHEET:	2 OF 3
PART NUMBER	0510000491.D				
REVISION	6				


NOTES:
SEE SHEET 1

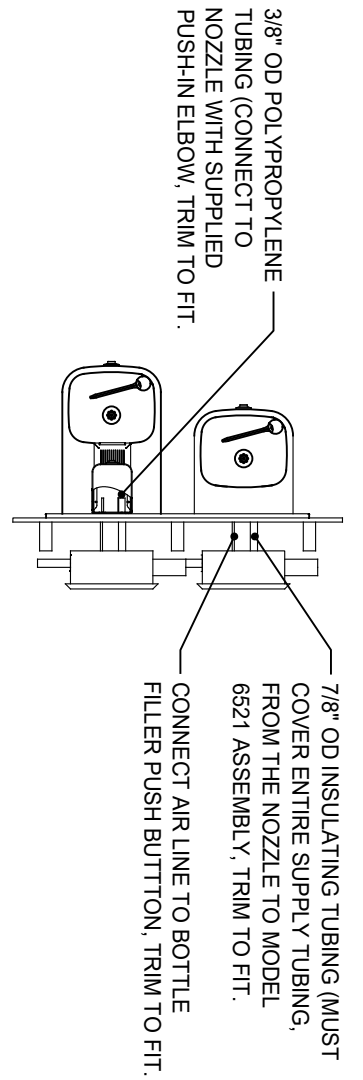

6700 MOUNTING PLATE (BEHIND FINISH WALL)
- OR -
6700R RETROFIT PLATE (ON TOP OF FINISH WALL) BOTH SOLD SEPARATELY

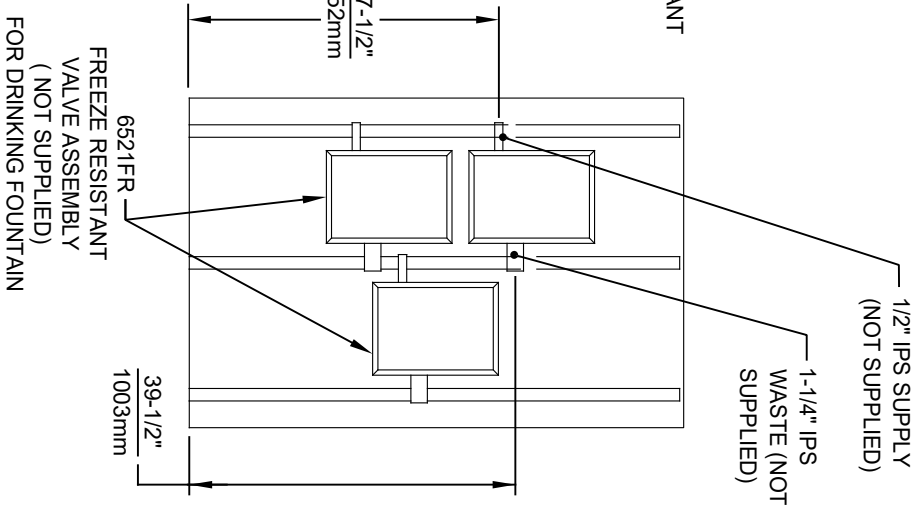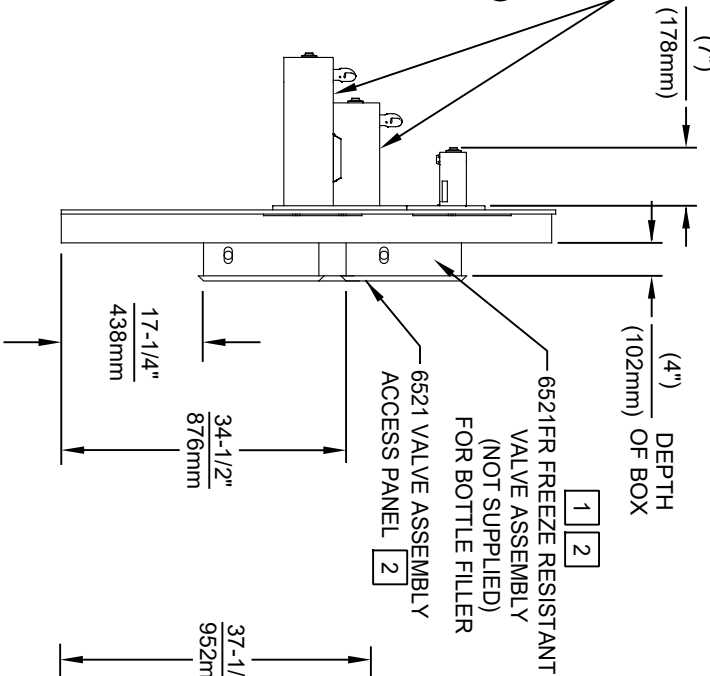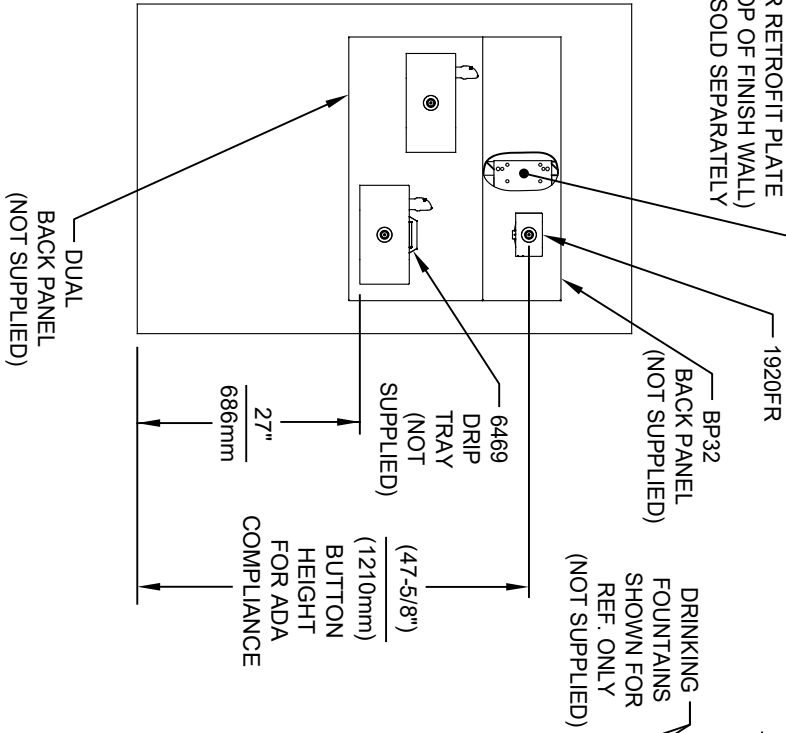

INSTALLATION SHOWN ABOVE HAWS MODEL 1119FR



1456 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWSCO.COM
WEBSITE: WWW.HAWSCO.COM

ECN NO. 5081	REVISED PER BY. FV	MODEL(S)	1920FR
DATE: 02/13/17	CHK'D: JS	DRAWING TYPE:	INSTALLATION
APPROVED: FV	DATE: 07/06/22	SCALE: N/A	DRAWING TYPE:
SIZE: A	SHEET: 3 OF 3	REVISION: 6	PART NUMBER: 0510000491.D