
model 7501BLH





FEATURES & BENEFITS

TEMPERED WATER

Heated, insulated blanket provides ANSI compliant tempered water in operating temperatures to -20° F (-30° C). Unit will stay tempered in non-extreme outdoor conditions (below 100° F (38° C)). Mounted over the Haws model 7501.

HAZARDOUS LOCATION

Complies with requirements for hazardous locations Class I, Division 2, Groups B, C, D, Temperature code T4; Class II, Division 2, Groups F, G.

OPTIONS

For more information, visit <u>www.hawsco.com</u> or call (888) 640-4297.




SPECIFICATIONS

Model 7501BLH NEMA 4, heated, insulated blanket to provide ANSI compliant tempered water in operating temperatures to -20° F (-30° C). The self-contained blanket easily installs on to existing model 7501. Eyewash and heating blanket offered as a package or individually. 120VAC, 60Hz, 1.38A electrical requirement. Power cord not provided – power connection must be made according to code using Class I Division 2 compliant equipment. Voltage options available. CSA certified for NEMA/Type 4 in Class 1, Division 2, Group B, C, D, T6, and Class 2, Division 2, Group F, G locations; and to ANSI/ISEA Z358.1


APPLICATIONS



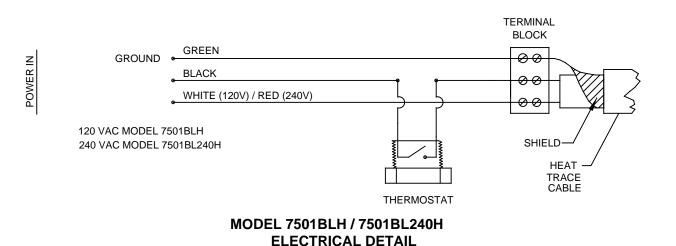

FOR MODELS 7501BLH & 7501BL240H:

- 1. ALL MODELS MUST HAVE A GROUND FAULT PROTECTION DEVICE (30mA GFCI) FOR HEAT TRACE. ELECTRICAL CURRENTS MAY BE INSUFFICIENT TO TRIP A CONVENTIONAL CIRCUIT BREAKER. ALL INSTALLATIONS MUST BE INSTALLED IN COMPLIANCE WITH LOCAL, STATE, AND/OR FEDERAL CODES.
- 2. ALL POWER CONNECTIONS MUST BE MADE ACCORDING TO NEC/CEC CODE USING FLEXIBLE CONDUIT OR CABLE RATED FOR NEMA/TYPE 4 – NO RIGID CONNECTION PERMITTED. MODEL 7501BLH/ 7501BL240H REQUIRES MINIMUM NEMA/TYPE 4 COMPLIANT EQUIPMENT. THE CORD AND FITTINGS SELECTED MUST HAVE THE APPROPRIATE HAZARDOUS LOCATION RATING REQUIRED FOR THE INSTALLATION LOCATION.



©2018 Haws Corporation - All Rights Reserved. HAWS[®] and other trademarks used in these materials are the exclusive property of Haws Corporation.