



model TWBS.EWE

AXION® Thermostatic Mixing Valves

FEATURES & BENEFITS

HAWS ORIGINAL

Designed and manufactured by Haws in the U.S.

BYPASS

Best-in-class cold water bypass flow (83% of rated tempered water flow) means continued protection under adverse conditions.

POSITIVE SHUT OFF

Actively suspends hot water flow when cold water supply is lost to protect against scalding.

PRESSURE DROP

Lowest internal pressure drop for this valve class – essential where supply pressure is low.

OPERATING RANGE

Minimal outlet temperature variation is achieved by having the best minimum flow rate in the industry.

SHUTTLE DESIGN

Superior shuttle design combined with premium material selection eliminates valve binding and reduces maintenance costs.

MIXING CHAMBER

Innovative funnel design generates turbulent flow to ensure consistent temperature blending across entire flow range.

LOW LEAD DESIGN

Certified to NSF61 and California Health and Safety Code 116875 (AB 1953-2006).

FLOW RATES

Flow range of 1 to 12 GPM (45.4 L) provides service for one or two safety eyewashes to reduce hardware costs.

ANTI-SCALD PROTECTION


Redundant anti-scald protection with internal cold water bypass ensures reliable protection. Main tempering valve provides primary protection while backup shutoff valve provides secondary high-temp protection. Internal cold water bypass supplies cold water if hot water supply or main tempering valve fails.

MEDICALLY SUPERIOR RESPONSE

AXION's superior design and technology provide a complete safety solution for increased victim comfort.

EXTENDED WARRANTY

3-year extended warranty based on superior engineering and best-in-class material selection means reliable protection you can trust for the long term.

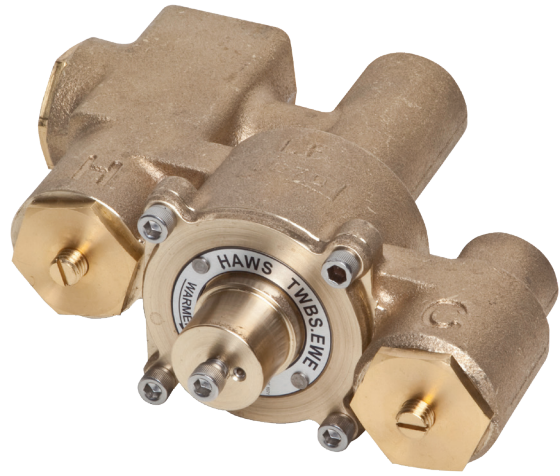

SPECIFICATIONS

Model TWBS.EWE - Thermostatic Mixing Valve (patent pending)

	MAXIMUM		MINIMUM	
Flow Rate	12 GPM	45.4 LPM	1 GPM	4 LPM
Hot Inlet Temperature	180° F	82° C	120° F	49° C
Recommended Hot Inlet Temperature	140° F	60° C		
Cold Inlet Temperature	70° F	21° C	40° F	4° C
Adjustable Outlet Temperature Range	90° F	32° C	60° F	16° C
Operating Pressure	125 PSI	8.6 BAR		
Factory Temperature Set Point	85° F	29° C		
Cold Water Bypass	10 GPM	37.8 LPM @ 30 PSID		

Inlet Ports: 1/2" NPT(f) Outlet Port: 3/4" NPT(F)



Maximum Inlet Pressure Differential: +/- 10%

Listings: ASSE 1071, ANSI Z358.1, CSA B125.3, NSF/ANSI 61-section 8, NSF/ANSI 372, California Health and Safety Code 116875 (AB 1953-2006).

FLOW CAPACITIES

MODEL	INLET	OUTLET	MINIMUM FLOW	INTERNAL COLD WATER BY-PASS AT 30PSI DROP	PRESSURE DROP							
					5	10	15	20	30	45	60	PSI
TWBS.EWE	1/2"	3/4"			.345	.689	1.03	1.38	2.07	3.10	4.13	BAR
			1	10	4.9	6.9	8.5	9.8	12	14.7	17	GPM
			4	38	18.5	26.1	32.2	37.1	45	55.6	64.4	L/MIN



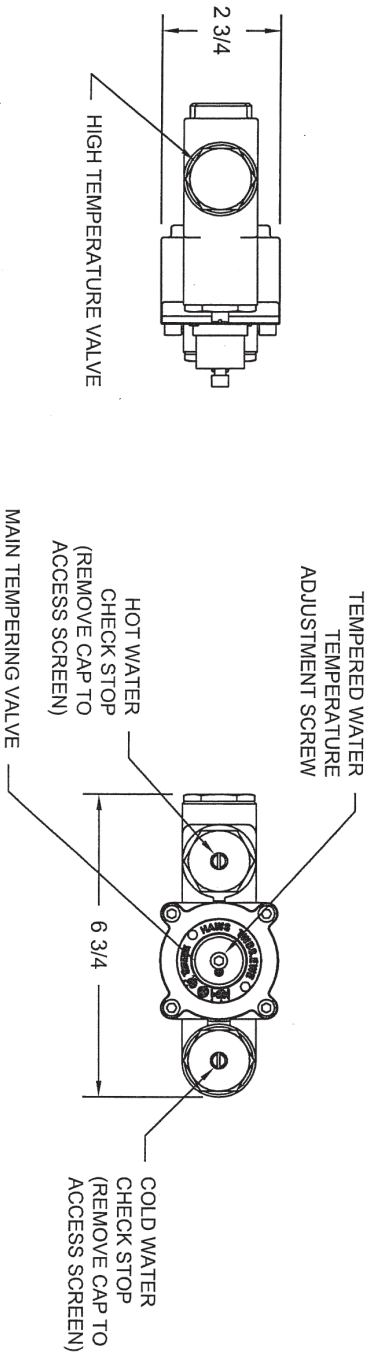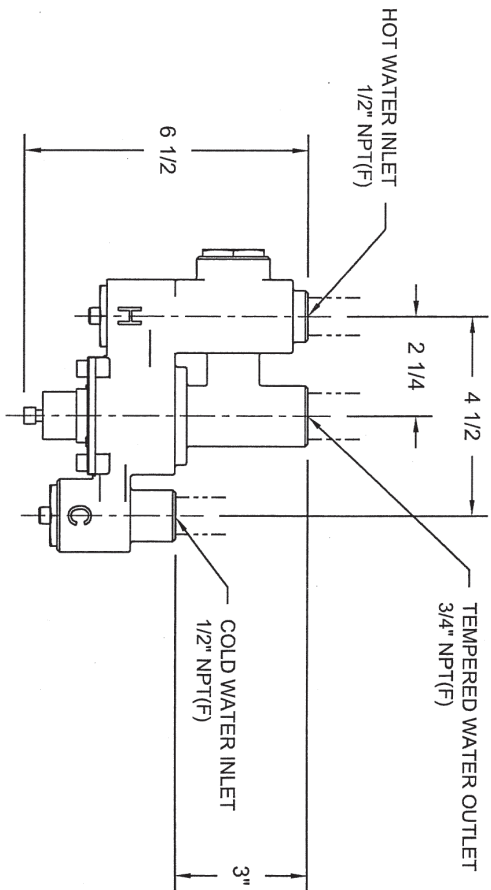

1455 KLEPPE LANE
 SPARKS, NEVADA, 89431
 (775) 359-4712 FAX (755) 359-7424
 E-MAIL: HAWS@HAWSOCO.COM
 WEBSITE: WWW.HAWSOCO.COM

ECN NO. REVISED PER BY:	MODEL(S)	PART NUMBER
4303		0002080230.D
DRW: VWC	TWBS, EWE	DRAWING NO.
DATE: 10/12/11		16050A
APPROVED: [Signature]	SCALE: 1/4"	DRAWING TYPE: INSTALLATION
	DATE: 10/12/11	SIZE: A
		SHEET 1 OF 1