


Family: Marcellina | Item No. 4403 GR


▼ start here




**Drawing 1 - Fixture Assembly**




**Drawing 2 - Fixture Assembly**

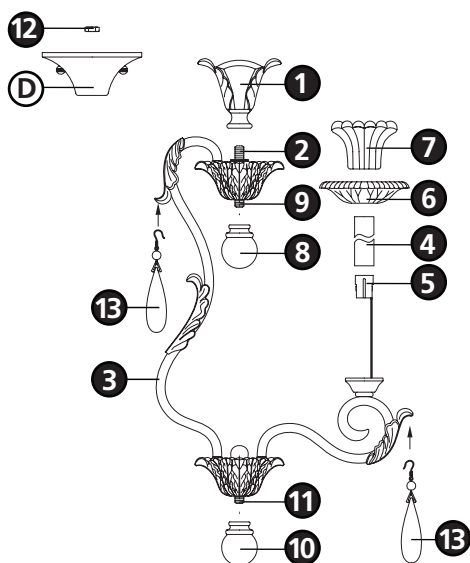

**Drawing 3 - Strap Detail**



**Drawing 4 - Fixture Mounting**



**1**

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

**\*\*\* The construction of this fixture will be accomplished by first determining whether it is to be ceiling mounted or chain hung, assembling the main body of the fixture, making all necessary electrical connections, mounting the main body in the style you selected, and then installing the crystals.**

**2**

1. To assemble fixture, if **hanging fixture** - slip loop (1) along wire and thread onto threaded tube (2) at top of fixture - see **Drawing 2**.
2. Rotate arms (3) until they are equally spaced 120 degrees apart - see **Drawing 1**.
3. Slip candle sleeve (4) over each socket (5) - see **Drawing 2**.
4. Slip glass bobesche (6) over each candle sleeve (4).
5. Slip glass cup (7) over each candle sleeve (4).
6. Fixture can now be lamped accordingly.

If **hanging the fixture**, please refer to hanging instruction sheet (I.S.19) provided and refer back to section 5 to install fixture crystals.

If **mounting fixture**, slip canopy (D) over threaded tube (2) then thread hex nut (12) onto threaded tube (2) and tighten to secure. Refer to next section (section 3) to continuing mounting installation of this fixture.

**3**

1. Prepare mounting strap (B) for mounting by installing screws (A) into mounting plate (B) - see **Drawing 3**.
  - Be sure the holes into which the screws are threaded match the spacing of holes (C) in the canopy (D) - see **Drawings 3 and 4**.
2. Attach mounting plate (B) to junction box (J), using screws (F) provided and slip supply wires through large center hole.

**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet (I.S. 18) and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.

**4**

1. Hang the fixture by slipping canopy (D) over screws (A) and hold in position - see **Drawings 3 and 4**.
2. Thread ball knobs (E) onto end of screws (A) and tighten to secure fixture to ceiling.

**5**

1. To install crystals, thread small crystal ball (8) onto threaded tube (9) and thread small crystal ball (10) onto threaded tube (11) - see **Drawing 2**.
2. Hang crystals (13) from areas indicated.

Note: Maximum wattage for 4403 fixture is 40 watts per bulb.

12.29.08