



Drawing 1 - Fixture Assembly

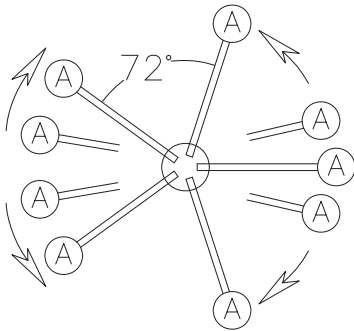

Drawing 2 - Fixture Assembly

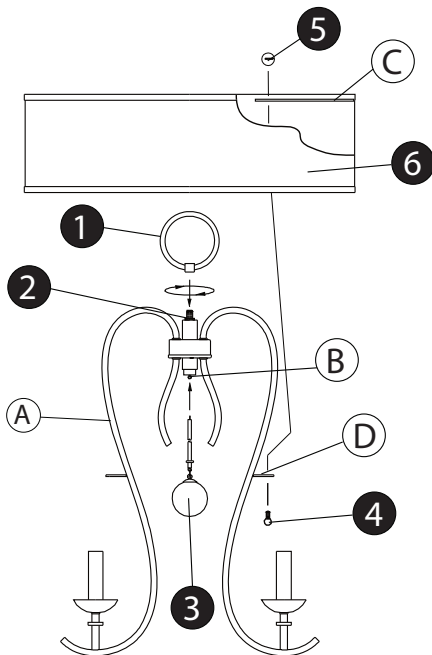

## ▼ start here

**1**

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

\*\*\* The construction of this fixture will be accomplished by first assembling the main body of the fixture, making all necessary electrical connections, hanging the fixture from the ceiling, and then installing the shade.

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

**2**

1. Rotate arms (A) until they are approximately 72 degrees apart - see Drawing 1.
2. Slip loop (1) along wire and thread onto tube at top of center column (2) - see Drawing 2.

**3**

1. To install crystal pendant (3) hook onto small loop (B).
2. To install shade (6), slip shade onto fixture and align hole in tab (C) of shade with holes in tab (D) of fixture arm.
3. Slip screw (4) through holes in shade tab and arm tab and thread on ball knob (5) to secure shade. Repeat for remaining tabs.
4. Fixture can now be hung from the ceiling, please follow mounting instruction sheet IS-19 provided.

Note: Maximum wattage for 4473 fixture is 60 watts per bulb.

01.01.12