




Family: Sloan Item No. 4545RB



Drawing 1 - Fixture Assembly



Drawing 2 - Fixture Assembly

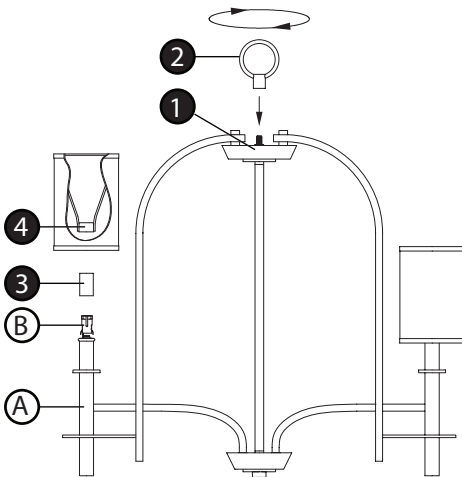

## ▼ start here

**1**

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

\*\*\* The construction of this fixture will be accomplished by first rotating the fixture arms into the correct position, assembling the basic fixture, installing the mounting hardware, making all necessary electrical connections, hanging the fixture, and then installing the shades.

**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

**2**

1. To assemble fixture, rotate arms (A) until they are equally spaced 72 degrees apart - see Drawing 1.
2. Slip loop (2) along wire and thread onto top of main body (1) - see Drawing 2.
3. Make sure all candle sleeves (3) are slipped over the sockets (B).
4. Please refer to the hanging instruction sheet (I.S. 19) provided to hang fixture. Then refer back to this sheet to continue installation of this fixture.

**3**

1. To install shades, slip shade cup (4) onto top of candle sleeve (3) - see Drawing 2.
2. Fixture can now be lamped accordingly.

Note: Maximum wattage for 4545 fixture is 60 watts per bulb.

11.4.09