




Family: Valley | Item No. 4708 VK



Drawing 1 - Assembly



Drawing 2 - Glass Installation

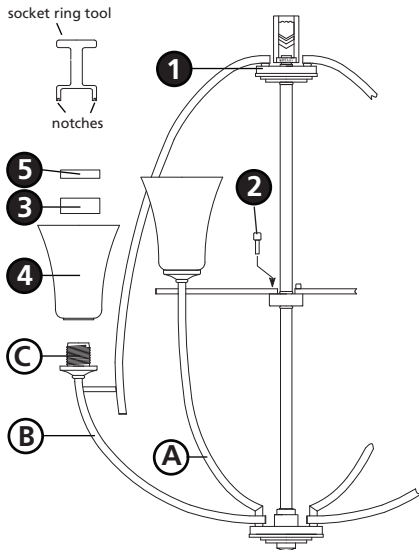

▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first assembling the main body of the fixture, making all necessary electrical connections, hanging the fixture from the ceiling, and then installing the glass.**

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

2

1. To assemble main body, spread arms (A) located on the main body assembly (1), until they are equally spaced 120 degrees apart - see **Drawings 1 & 2**.
2. Thread screw (2) onto top bracket of arm (A) and tighten to secure arm (A).
3. Rotate arms (B) outward until they are 60 degrees apart.
4. Please refer to the hanging instruction sheet (I.S. 19) provided to hang fixture. Then refer back to this sheet to install glass.

3

1. To install glass, remove socket ring (3) from socket (C) - see **Drawing 2**.
2. Slip glass (4) over socket (C) and hold in position.
3. Slip spacer (3) and thread socket ring (5) onto socket (C) to secure glass (4).
4. Use socket ring tool to tighten socket ring (5). Notches in socket ring fit into notches on socket ring tool. Tighten socket ring until snug. Do not over tighten.
5. Repeat steps 1-3 for remaining glass.
6. Fixture can now be lamped accordingly.

Note: Maximum wattage for 4708 fixture is 75 watts per bulb.

2.7.08