

Assembly Instructions for 1985 ST

Use Drawing 1 for parts reference.

1. Unpack fixture and locate all parts shown in drawing 1. Take main body assembly (1) and slide top trim (2) over threaded nipple. Lock in place by turning finial (3) onto nipple. Feed scroll arm (4) through loop and lock in place with threaded ball knob (A).

Note: fixture can be mounted at this time. Please follow instruction on sheet 2. After mounting please return to this section of the instruction sheet for Glass installation instructions.


Glass installation

Fixture can be lamped at this point.

Please make note of maximum wattage for this fixture is 100 watts.

1. Slip glass (5) into main body (1). While pushing upward turn glass counter clockwise until glass is seated snugly.

Caution: over tightening may cause glass to crack.

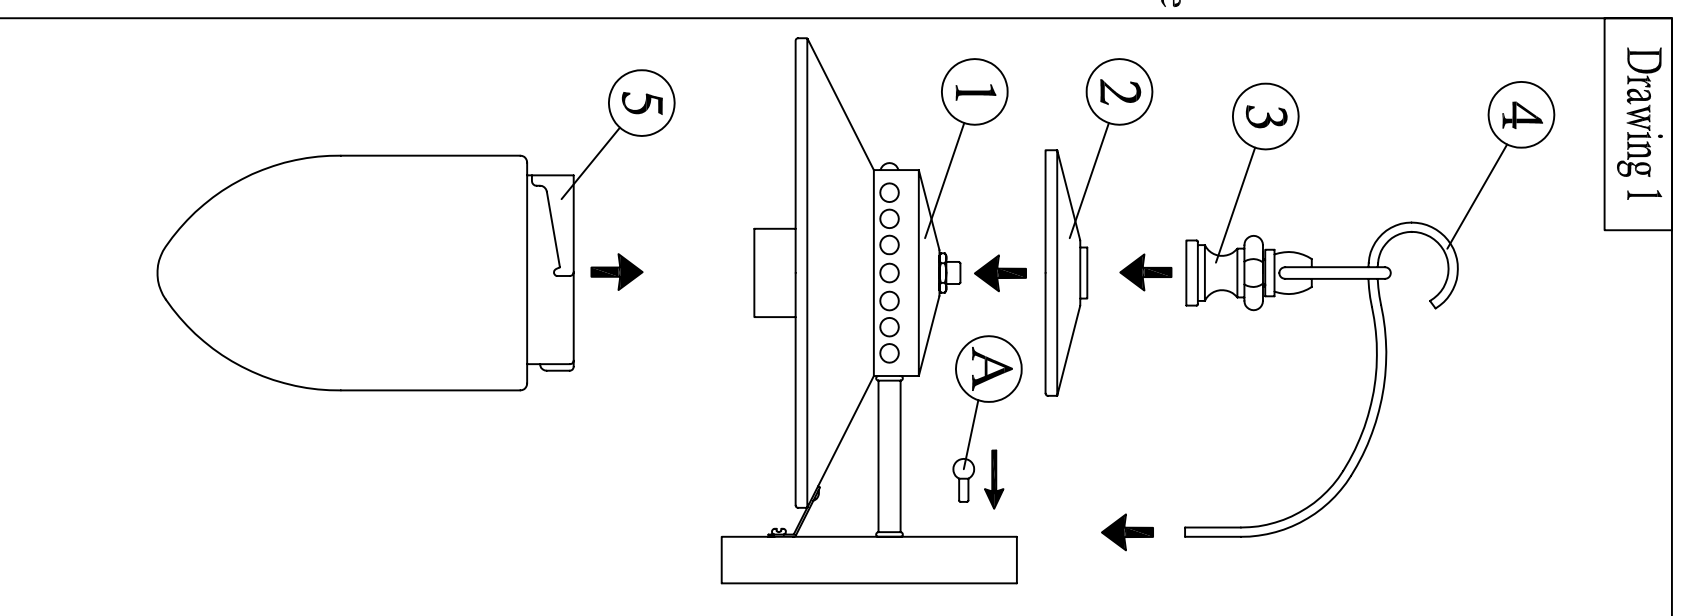

HINKLEY LIGHTING 33000 Pin Oak Parkway Avon Lake, OH 44012 800.446.5539 / 440.653.5500 hinkleylighting.com

10/11/05 RI



Mounting Instructions for 1985 ST

Mounting Instructions

SAFETY WARNING: Read wiring and grounding instructions (I.S. 18) and any additional installation directions. Turn power supply off during installation. If new wiring is required, consult a qualified electrician or local authority for code requirements.

Use Drawing 2 for reference.

1. Prepare gem strap (A) for mounting by threading two 8-32 screws (B) provided into back of gull wing bracket of gem strap (A). Holes chosen to thread screws in to should correspond with mounting holes (D) in backplate. [see drawing 3 for reference].
2. Mount gem strap (A) to junction box (J) with two 8-32 screws (C), 1" long. (not provided).
3. Make electrical connections from supply wire to fixture lead wires. Reference to I.S. 18 provided for correct wire identification and attachments.
4. After all wiring connections are made, slip the two mounting screws (B) through the two mounting holes (D) in the backplate (E).
5. While holding fixture in place, thread the two ball knobs (F) on to mounting screws (B), and tighten.
6. Please proceed to Roof installation and relamping instructions.

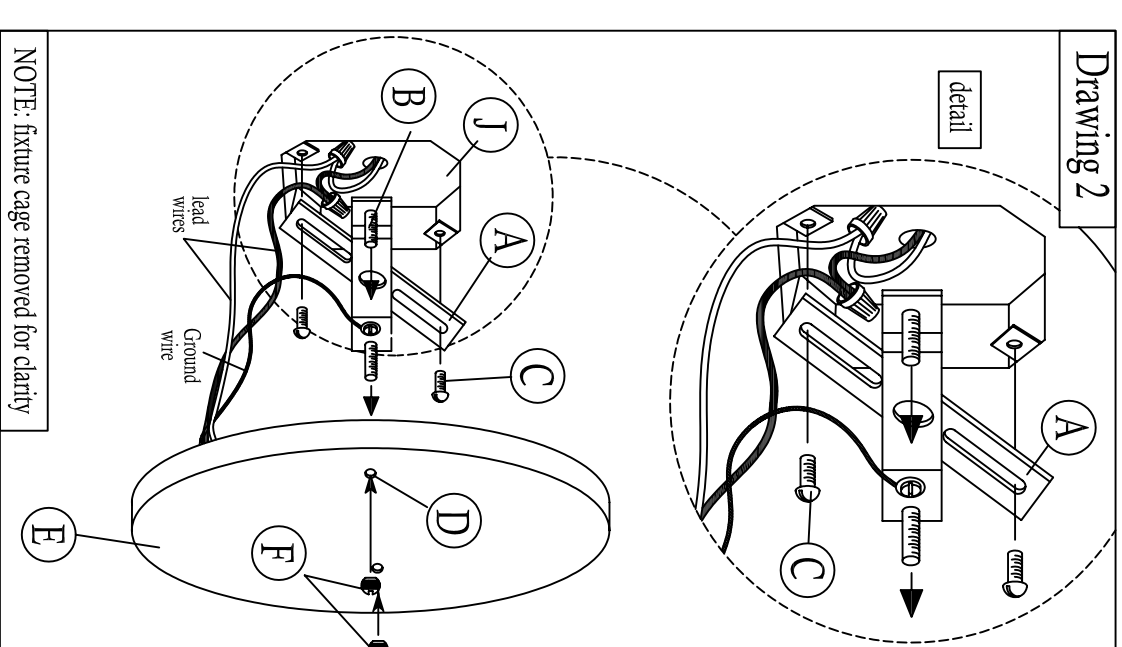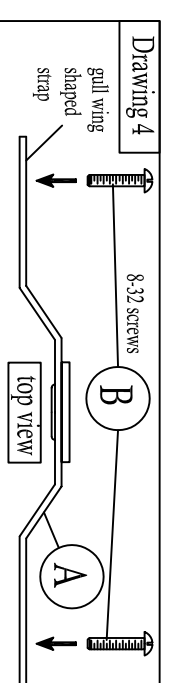

NOTE: fixture cage removed for clarity

