

VAPORTITE VBGG/VWGG INCANDESCENT

Cat. #		Approvals
Job	Type	



APPLICATIONS

- Wall/Ceiling/Pendant entry, corridor, tunnel, service area, stairwell, or retro-accent.

SPECIFICATIONS

- 150 watt/300 watt maximum medium base incandescent.
- Platinum silver protective finish.
- VWGG has cast aluminum wall bracket with cast wiring box. Box has external lugs and four side 1/2" hubs for surface conduit and one rear 1/2" access hub.
- VBGG has cast aluminum wiring box with external lugs for ceiling mount and four 1/2" hubs for surface conduit. Wiring box has top 1/2" hub for pendant mount.
- All units have water/bug tight gasketing.
- All units have medium base porcelain socket.
- All units include clear glass protective globe with thread-on cast aluminum guard. Guard includes vandal-resistant set screw.

LISTINGS

- All units are UL listed for use in wet locations.




150 WATT

300 WATT

Lugs: 5" center to center

Lugs: 5" center to center

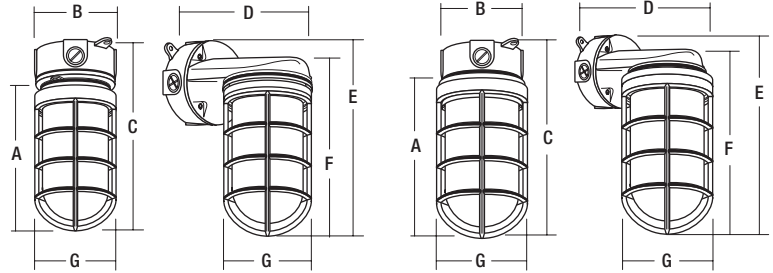

	A	B	C	D	E	F	G
150W	7"	4 1/2"	9"	7 1/4"	9 3/4"	8 1/2"	4"
	178 mm	114 mm	229 mm	184 mm	248 mm	216 mm	102 mm
300W	9"	4 1/2"	11"	8"	11"	9"	5 1/2"
	229 mm	114 mm	279 mm	203 mm	279 mm	229 mm	140 mm



ORDERING INFORMATION

Catalog Number	Wattage	Mounting	Weight	
			lbs	kg
VBGG-150	150	Box/Pendant	3.0	1.36
VWGG-150	150	Wall	3.5	1.59
VBGG-300	300	Box/Pendant	4.0	1.81
VWGG-300	300	Wall	4.5	2.04

Due to our continued efforts to improve our products, product specifications are subject to change without notice.



Outdoor Lighting

Hubbell Outdoor Lighting • 101 Corporate Drive • Spartanburg, SC 29303 • PHONE: 864-599-6000

For more information visit our web site: www.hubbell-ltg.com