


FAN DIAMETER (A)	8 ft	10 ft	12 ft	14 ft	16 ft	18 ft	20 ft	24 ft
------------------	------	-------	-------	-------	-------	-------	-------	-------

DESCRIPTION INPUT POWER	AC 1PH 200-240v 50/60 Hz			AC 3PH 200-240v 50/60 Hz			AC 3PH 380-480v 50/60 Hz	
-------------------------	--------------------------	--	--	--------------------------	--	--	--------------------------	--

STANDARD DOWNROD (B)	2 ft	2 ft	2 ft	3 ft	3 ft	3 ft	4 ft	4 ft
	0.61 m	0.61 m	0.61 m	0.91 m	0.91 m	0.91 m	1.22 m	1.22 m

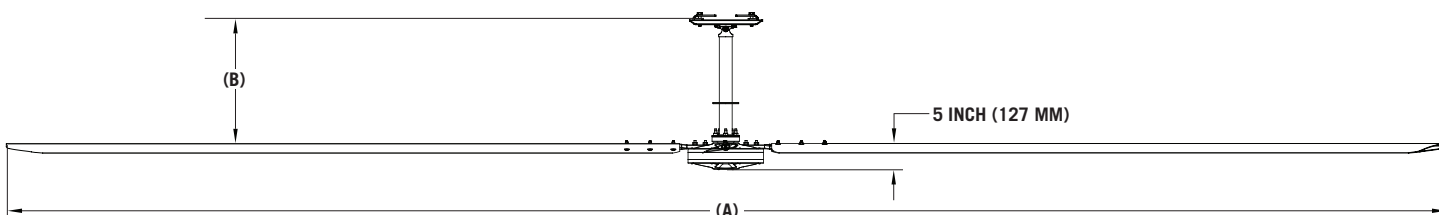

MOTOR POWER	5/8 HP	5/8 HP	5/8 HP	5/8 HP	5/8 HP	5/8 HP	5/8 HP	5/8 HP
	0.466 kW	0.466 kW	0.466 kW	0.466 kW	0.466 kW	0.466 kW	0.466 kW	0.466 kW

EFFECTIVE RANGE AREA ⁽¹⁾	32 ft	40 ft	48 ft	56 ft	64 ft	72 ft	80 ft	96 ft
	1,024 sqft	1,600 sqft	2,304 sqft	3,136 sqft	4,096 sqft	5,184 sqft	6,400 sqft	9,216 sqft
	9.75 m	12.20 m	14.63 m	17.07 m	19.50 m	22.00 m	24.40 m	29.30 m
	95.06 m2	148.84 m2	214.04 m2	291.38 m2	380.25 m2	484.00 m2	595.36 m2	4858.49 m2

MAX. AFFECTED AREA ⁽²⁾	40 ft	50 ft	60 ft	70 ft	80 ft	90 ft	100 ft	120 ft
	1,600 sqft	2,500 sqft	3,600 sqft	4,900 sqft	6,400 sqft	8,100 sqft	10,000 sqft	14,400 sqft
	12.19 m	15.24 m	18.28 m	21.33 m	24.38 m	27.43 m	30.48 m	36.57 m
	148.60 m2	232.26 m2	334.16 m2	454.97 m2	594.38 m2	752.40 m2	929.03 m2	1,337.36 m2

MAX RPM	156	139	107	107	95	78	77	61
---------	-----	-----	-----	-----	----	----	----	----

FAN HANG WEIGHT ⁽³⁾	87 lbs	94 lbs	101 lbs	128 lbs	135 lbs	138 lbs	145 lbs	159 lbs
	40 kgs	43 kgs	46 kgs	58 kgs	61 kgs	62 kgs	66 kgs	72 kgs

(1) Effective Range Area: Area calculated based on the ASHRAE Standard 55, (5-6.67 ft/s (or (300-400 fpm). Thermal Environmental Conditions for Human Occupancy.

(2) Max covered area: Area calculated based on (2.7-3.8 ft/s) or (162-228 fpm) airflow as effective maximum area.

(3) Total fan hang weight. Included blades, motor, hanging system, accessories.