
BREATHING WALL-ECOCARAT

Rooted in traditional Japanese mud-wall construction, ECOCARAT is a sublime collection of interior wall tiles that combine natural materials and colors with exquisite patterns to impart a sense of unparalleled beauty and relaxation. Defined by design and technology excellence, ECOCARAT features moisture-regulating and odor reducing properties to help enhane indoor comfort.

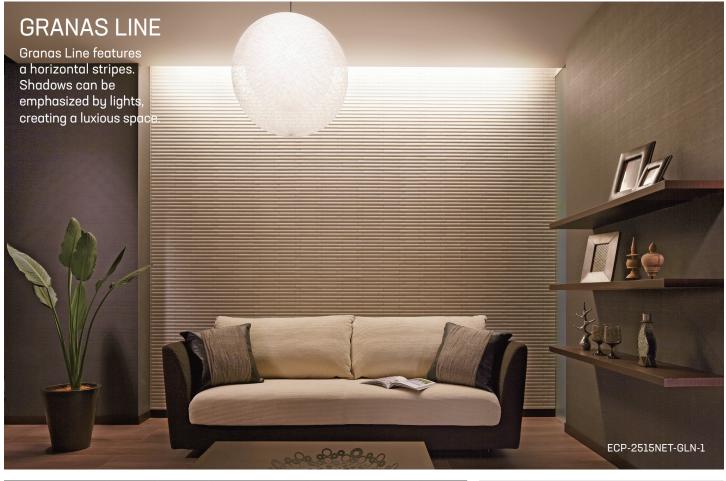


APPLICATIONS (Interior Dry Wall ONLY)

LIVING ROOM WALL	BEDROOM WALL	ENTRANCE	HALLWAY WALL	RESTROOM	EXTERIOR WALL	BATH/ SHOWER WALL	FLOOR	KITCHEN BACK
Yes	Yes	Yes	Yes	Yes*1	No	No	No	No

*1. Above waste/water line

COLOR VARIATIONS*2



*2. Please note: variations in color, shade, surface texture and size are natural characteristics of all products and should be expected. Images shown are representative. Actual product may vary slightly.



INAX

FIELD



ECP-2515NET-GLN1 White



ECP-2515NET-GLN3 Brown



ECP-2515NET-GLN2 Beige



ECP-2515NET-GLN4 Dark Grey

Material:	Porous ceramics/Glazed			
Size/Piece:	150.5 x 24.25mm (5.93 x .96 in)			
Size/Sheet:	302 x 302mm (11.89 x 11.89 in)			
Thickness:	8.5mm			
Joint:	1mm Open joint			
Sq. Ft/Carton:	10.47			
Sheets/Carton:	11			
Mounting:	Back net-Paper			
Weight/Carton:	26.2 lbs			

TRIM/CORNERS



ECP-2515N-9014-GLN1...GLN4

Installation for corner (External)



Material:	Porous ceramics/Glazed			
Size/Piece:	(35.9+73.75)x24.25mm *(1.41+2.9)x.95 in			
Size/Sheet:	(35.9+73.75)x302mm *(1.41+2.9)x11.89 in			
Thickness:	8.5mm			
Joint:	1mm Open joint			
Ln. Ft/Carton:	3.86			
Sheets/Carton:	4			
Mounting:	Back net-Paper			
Weight/Carton:	5.5 lbs			



INSTALLATION

BASE MA	TERIAL SUITED	EXISTING	WALL FINISHES	OTHER PRECAUTIONS		
Material:	Suitable	Existing Surface	Recommendations	Adhesive/ Thin-set	Mapei Type 1/ Mapei Ultramastic ECO (or comparable products	
Gypsum Board Yes		Wallpaper	Remover wallpaper		from other brands)	
Plymwood	Yes	Paint	Remove the paint or add a cement layer for stronger bonding	Trowels	3mm (% in) * Wider trowel will lead to excess adhesive on the back.	
Reinforcement of cement board fiber	Yes					
Concrete + mortar base	Yes	Stone (Marble, Terrazzo, etc.)	Install on top of the existing finish	Grouting	Non-Grouting (1mm Open joint)	
Extrusion cement panel / ALC panel	Yes					

Apperance of Joints



Note: There are spaces between the tiles of ECOCART, which makes the back net and striped arks visible.

https://www.inaxecocarat.com/products/granas-line/



INAX

FOR BETTER FUNCTION

Sufficient ventilation is required



Proper ventilation is recommended for more effective ECOCARAT performance and to help control humidity.

Ventilate frequently for 1 to 2 weeks after installation




The moisture of the the adhesive may be present in the room and room temperature may increase.

Avoid contact with fabric



The uneven surface of Ecocarat Plus tiles may damage fabric.

Avoid sharp objects



The tile surface may be scratched or scraped.

Do not use hooks, screws or hammers



Doing so can cause cracks and breakage. Please consult contractor.



Restroom Grime

Scuff Marks

INAX

DAILY CARE

Dust regularly with a clean cloth. Avoid washing with water directly.



- Use of mild household detergent will enhance cleaning results
- Remove stains using melamine foam cleaning sponge

Toothpaste

Fingerprints

• For best results, use melamine foam sponge and mild detergent


















Cleaning Recommendation

For best results we suggest the use of a melamine foam sponge for the treatment of dirt and stains shown.

Detergents containing bleach: Read precautions before use.

General household cleaners refer to mild, non-abrasive agents used to clean furniture, wall paper, windows, electronics, etc, and can be used to clean tiles. Do not use thinners or cleansers with acids. Doing so will damage the surface and characteristics of the tile.



Hard to remove stains must be treated promptly for best results.



Hair Dye Liquid



Other:

- Paint tool - Pen (water based, oil based) - Crayon - Nail polish
- -Ink

Removal of Tough Stains

- Please be careful for dirt and detergent to turn to neither the side nor the back at the time of cleaning. Please use a line stick etc. if needed.
- Remove dirt and spills promptly as set-in stains may be difficult to remove by the methods noted above.

- To remove tough stains, use mild detergent on a toothbrush and gently work into the stain. Stain may be permanent if allowed to absorb over time.

•

....

- Regular care and inspection is recommended to maintain the beauty of the tile.

