


UL SPECIFICATION


- * FIXTURE SHALL BE LISTED FOR LOCATION ONLY AND LABELED AS SUCH.
- * FIXTURE MUST BE MANUFACTURED IN ACCORDANCE WITH UL STANDARD 1598.

PARTS SPECIFICATIONS
ITEM QTY DESCRIPTION

- A (1) SOCKET- UL LISTED/CSA CERTIFIED
BASE= MEDIUM
SOCKET= PORCELIN
SEE LEAD WIRE FOR SOCKET WIRE SPEC.
- B (1) LEAD WIRE- 7" [180] FROM CANOPY
UL LISTED/CSA CERTIFIED, AWG #18
105°C BLACK AND WHITE WIRE.
STRIP 1/2 [12.7], SPLIT 3 [76.2].
FROM TOP OF SCROLL.
(SEE CHART FOR COLOR).
- C (1) GROUND WIRE- 7" [180] FROM CANOPY
1/4 LAY COPPER GROUND WIRE.
FROM TOP OF SCROLL.
(SEE CHART FOR TINT).

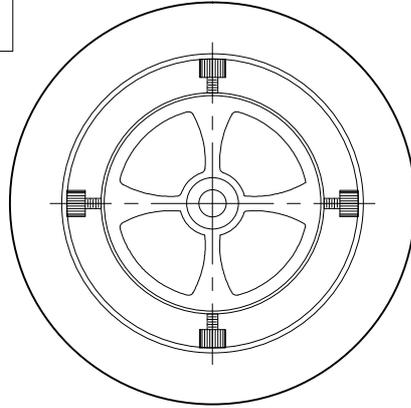

INNOVATIONS LIGHTING
DESIGN COPYRIGHT - 10/08/2020
ALL RIGHTS RESERVED AND MAY
NOT BE DUPLICATED WITHOUT OUR
WRITTEN PERMISSION

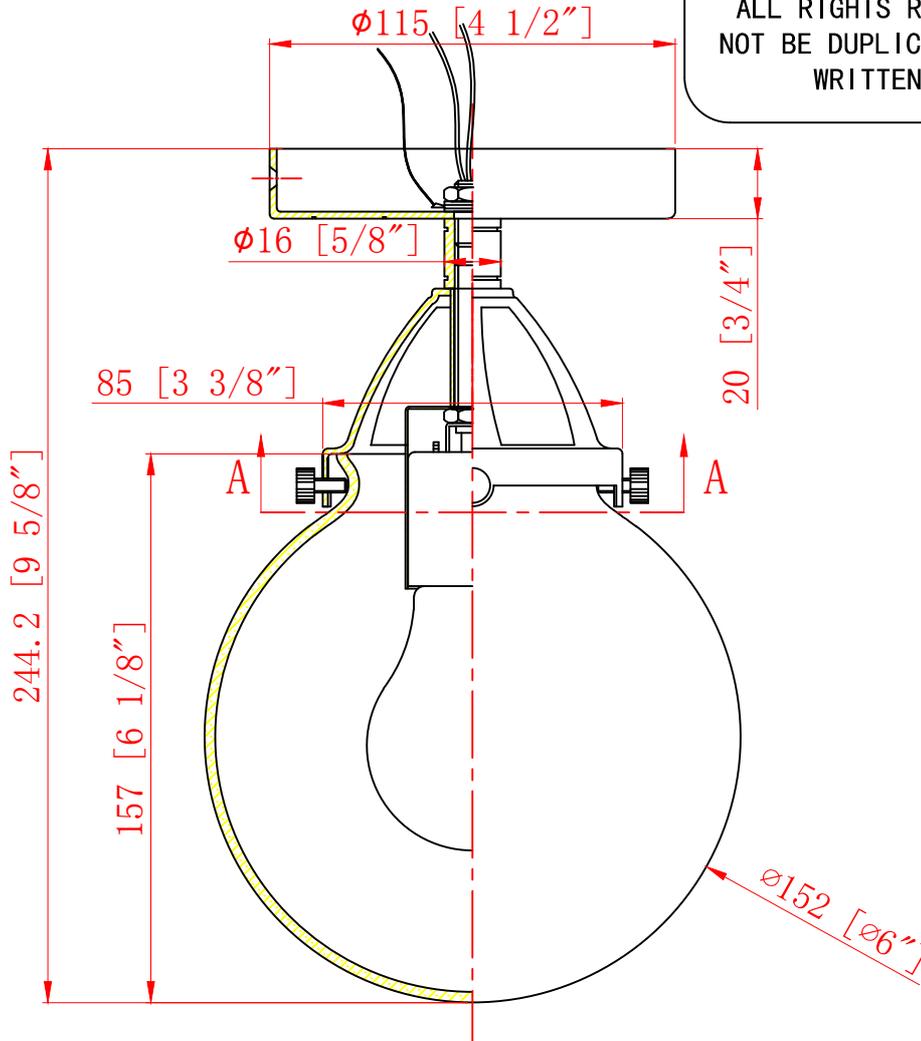

NO.	PART NO.	DESCRIPTION	REQ.

NOTICE: ANY DESIGN OR OTHER INFORMATION HEREON DEVELOPED BY THIS COMPANY IS CONFIDENTIAL MATERIAL AND EXCLUSIVE PROPERTY OF THE L.D. ALFA CO. DISCLOSURE OR REPRODUCTION REQUIRES THE WRITTEN CONSENT OF THE L.D. ALFA CO.

INNOVATIONS
CREATIVITY MEET. EVOLUTIONARY DESIGN

DRAWN IN THIRD ANGLE PROJECTION 	*mm* DIMENSION INDICATED IN [] DIMENSION IN [] IS FOR REF. ONLY			
	TOLERANCES (EXCEPT AS NOTED)			
	DECIMAL NONE ±.031 .X ±.015 .XX ±.010 .XXX ±.005	ANGULAR ± 1/2°	FRACTIONAL ± 1/32	SCALE 1:2
	DATE 07/08/2020	DRAWN BY SSL	CHECKED BY X	APPROVED BY X

TITLE Semi-Flush	
PART NO. Semi-Flush	REV.
ITEM NO. 284-1C	REV. A