


INSTRUCTIONS:

1. OPEN DOOR TO DESIRED LOCATION.
2. LOCATE MOUNTING HOLES.
3. DRILL 1" (25mm) DIAMETER BY 2-3/4" (70mm) DEEP HOLE.
4. REMOVE MATERIAL AS REQUIRED.
5. GROUT STOP INTO WALL* OR FLOOR*.



*RECOMMENDED GROUT IS THOROGRIP AS MFD BY THORO SYSTEM PRODUCTS OR APPROVED EQUIVALENT

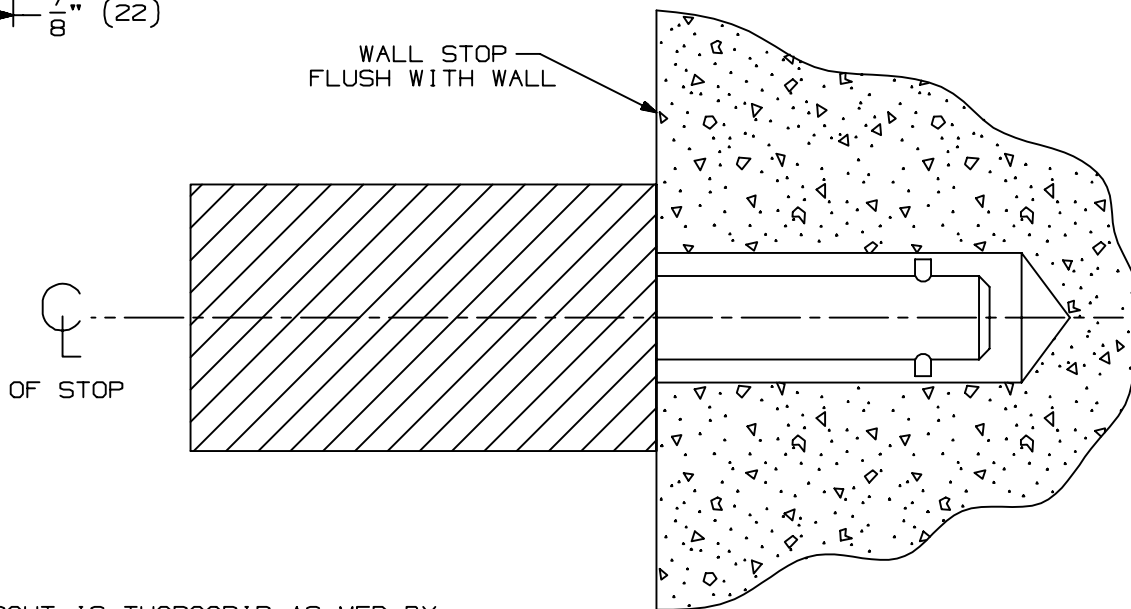

FS18L WALL STOP
INSTALLATION INSTRUCTION



NOTE: DIMENSIONS IN () ARE IN MILLIMETERS

TEMPLATE NUMBER: INST.FS18L_0

DATE: 07-26-01