


Piccolo™ Technical Specifications

- Product Weight 130 II - Cutout - Total Weight 754.85 - Floor Loading 67.6 lb/ft - Operating Gallons (Max) 45 G	Jniversal
- Product Weight 130 II - Cutout - Total Weight 754.85 - Floor Loading 67.6 lb/ft - Operating Gallons (Max) 45 G - Soaking Depth 12.5	Iniversal
- Cutout - Total Weight 754.85 - Floor Loading 67.6 lb/ft - Operating Gallons (Max) 45 G - Soaking Depth 12.5	Siliversal
- Total Weight 754.85 - Floor Loading 67.6 lb/ft - Operating Gallons (Max) 45 G - Soaking Depth 12.5	bs (58.97 kg)
- Floor Loading 67.6 lb/ft - Operating Gallons (Max) 45 G - Soaking Depth 12.5	N/A
- Operating Gallons (Max) 45 G - Soaking Depth 12.5	lbs (342.39 kg)
- Soaking Depth 12.5	t² (330.05 kg/m²)
	Gal. (170.3 L)
L Outer Length 59"	" (31.75 cm)
	(149.86 cm)
L2 Interior Depth 16.8	" (42.67 cm)
W Outer Width (Min/Max) 29" / 32" (7	3.66 cm / 81.28cm)
H Overall Height (Min/Max) 20.8" / 24.8"	(53.34 cm / 63.5 cm)
A Overflow Height 13.85	5" (35.18 cm)
B Short Edge to Drain Center 13	3" (33 cm)
C Long Edge to Drain Center 16	" (40.6 cm)
D Drain Shoe Length 6.25"	' (15.875 cm)
E Flange Height	N/A
F Deck Width* 6.4"	' (16.25 cm)
G Service Access Dimensions	N/A
I Floor Cutout for Drain 6" x 15" (1	5.2 cm x 38.1 cm)
J Interior Dimensions J(L) x J(W) 41" x 21.5" (104.1 cm x 54.6 cm)
K Skirt Base Dimensions K(L) x K(W) 44.5" x 20"	
M Backrest Angle	(113 cm x 50.8 cm)

NOTE

The overall dimensions are nominal with a tolerance of +0 and -.25" (6mm).


Key Dimensions

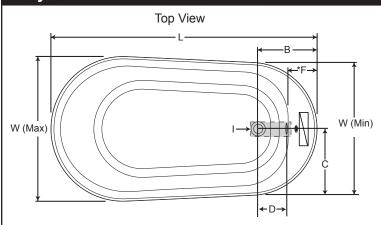


*Deck width reflects only area indicated on detail.

Centerset faucet mounting area - Included MU66000 Low-profile Overflow Kit required for installation.

NOTE: For faucet technical specifications, please reference QA40000 Roman Tub Filler located on: www.jacuzzi.com/baths/support/specs-and-manuals/

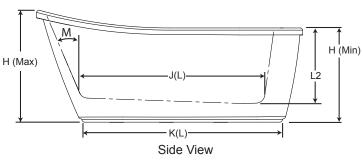



©2016 Jacuzzi Luxury Bath • For additional information call Customer Service 800-288-4002 • www.jacuzzi.com/baths/
Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.
PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.